




# OIL ANALYSIS REPORT

Sample Rating Trend

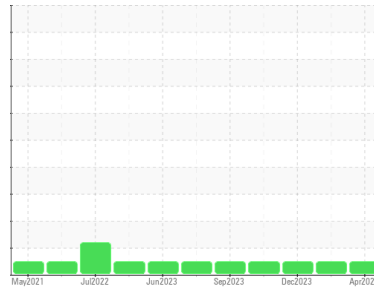

**NORMAL**



Area  
**(41-028)**  
 Machine Id  
**227020-9991**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0112770</b>	GFL0045463	GFL0101339
Sample Date	Client Info	<b>01 Apr 2024</b>	23 Jan 2024	28 Dec 2023
Machine Age	hrs	<b>3650</b>	284548	3610
Oil Age	hrs	<b>0</b>	133117	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>6</b>	13	9
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	2	2
Lead	ppm ASTM D5185m >40	<b>2</b>	10	0
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	0
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>12</b>	6	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	4
Molybdenum	ppm ASTM D5185m 60	<b>61</b>	64	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>997</b>	1054	942
Calcium	ppm ASTM D5185m 1070	<b>1127</b>	1168	1065
Phosphorus	ppm ASTM D5185m 1150	<b>1144</b>	1059	1064
Zinc	ppm ASTM D5185m 1270	<b>1285</b>	1317	1228
Sulfur	ppm ASTM D5185m 2060	<b>3501</b>	3052	3393

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	6	1
Sodium	ppm ASTM D5185m	<b>3</b>	3	0
Potassium	ppm ASTM D5185m >20	<b>1</b>	0	3

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	1.4	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>6.5</b>	12.6	10.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.6</b>	23.5	20.6


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.2</b>	21.1	18.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.9</b>	7.9	8.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

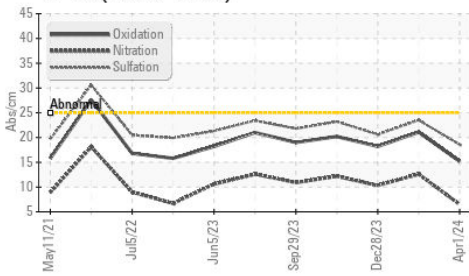

Base Number

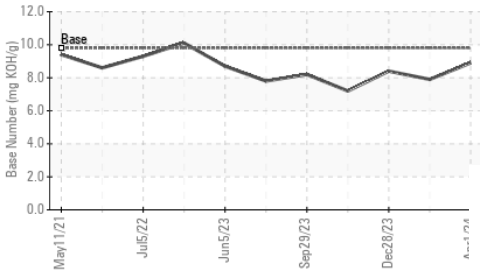

Viscosity @ 100°C

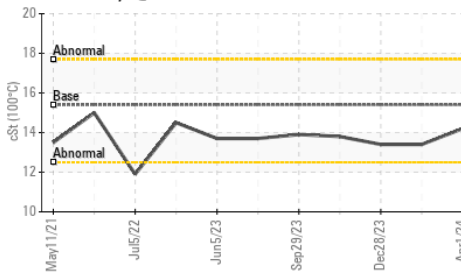


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	13.4

## GRAPHS


Ferrous Alloys

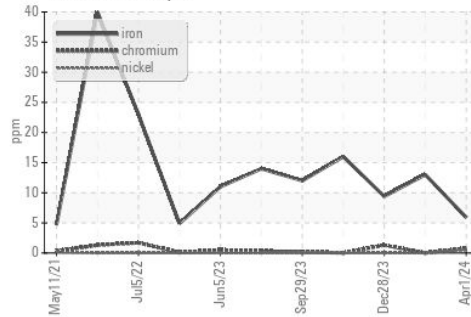


Non-ferrous Metals

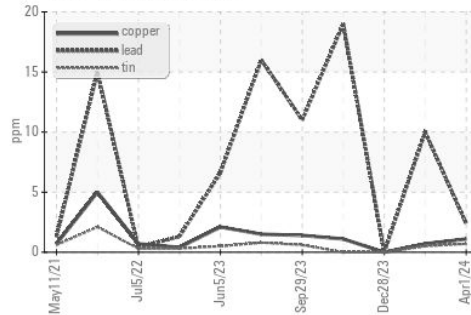

Viscosity @ 100°C

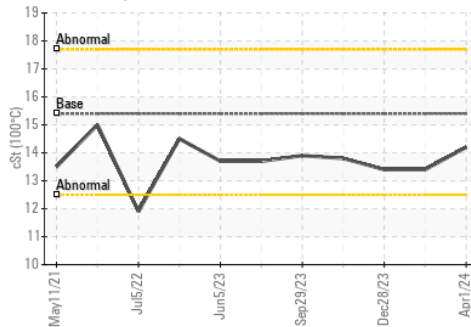

Base Number

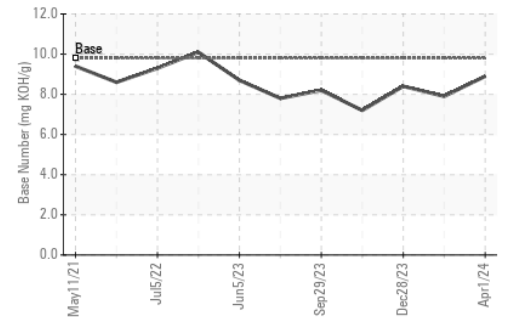

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0112770  
 Lab Number : 06140554  
 Unique Number : 10965362  
 Test Package : FLEET

Received : 05 Apr 2024  
 Tested : 08 Apr 2024  
 Diagnosed : 08 Apr 2024 - Wes Davis

GFL Environmental - 654 - Richmond Hauling  
 11800 Lewis Road  
 Chester, VA  
 US 23831

Contact: Jimmy Mayes  
 jmayes@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: