


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / PRYOR STONE [69258]**  
 Machine Id  
**WL137**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

### Sample Rating Trend

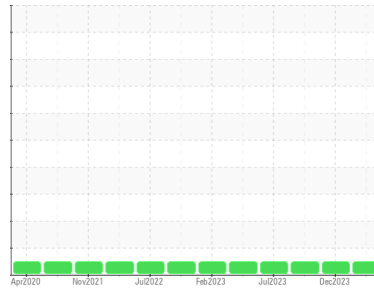

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Pm3 performed. All oil samples taken. Engine oil, engine oil filters, fuel filters, air filters, and cabin air filters changed. )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0086634</b>	PCA0084404	PCA0086230
Sample Date	Client Info		<b>02 Apr 2024</b>	16 Dec 2023	06 Oct 2023
Machine Age	hrs	Client Info	<b>33333</b>	32690	32269
Oil Age	hrs	Client Info	<b>1548</b>	905	484
Oil Changed	Client Info		<b>Oil Added</b>	Oil Added	Oil Added
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>10</b>	4	4
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>3</b>	<1	1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >75	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>2</b>	0	<1
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 9	<b>11</b>	12	0
Calcium	ppm	ASTM D5185m 3114	<b>3568</b>	3324	3704
Phosphorus	ppm	ASTM D5185m 1099	<b>882</b>	895	1028
Zinc	ppm	ASTM D5185m 1245	<b>1115</b>	1085	1317
Sulfur	ppm	ASTM D5185m 7086	<b>4289</b>	4131	4954


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>12</b>	10	11
Sodium	ppm	ASTM D5185m	<b>1</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	<1

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








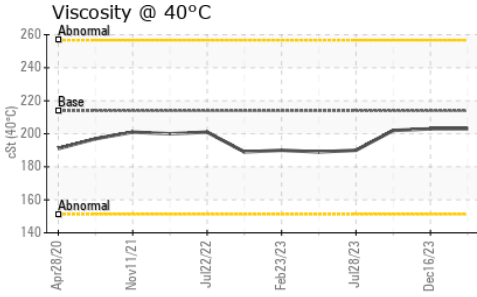


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	<b>203</b>	203	202

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

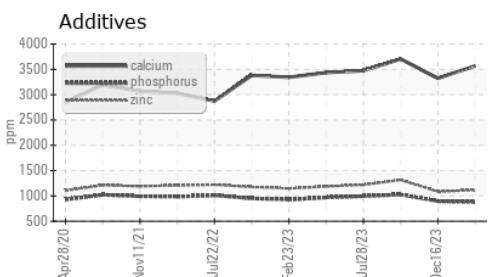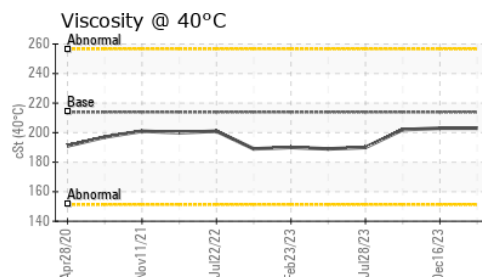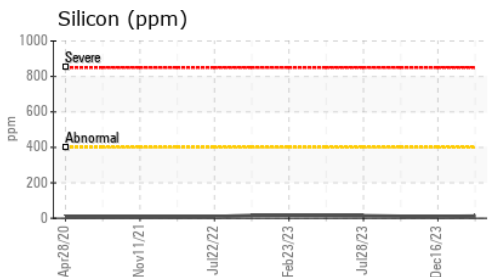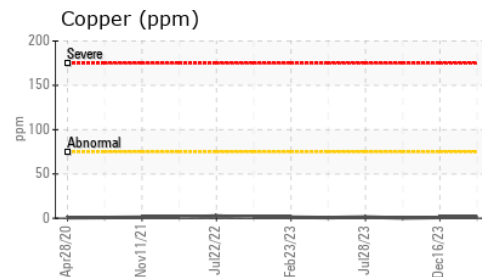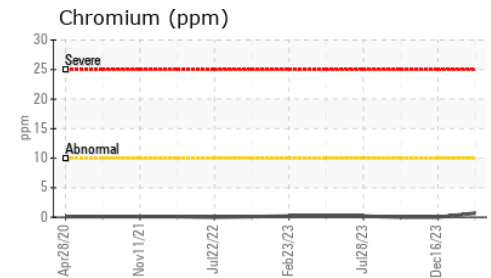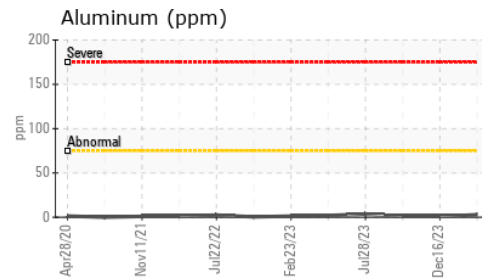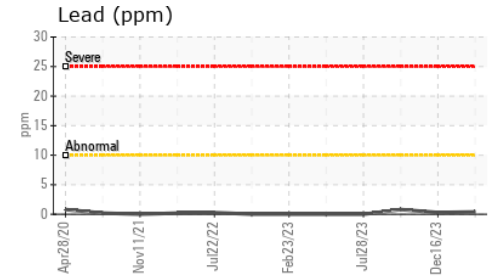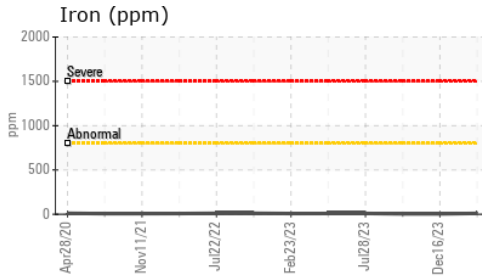

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086634  
**Lab Number** : **06149708**  
**Unique Number** : 10979786  
**Test Package** : MOB 1

**Received** : 15 Apr 2024  
**Tested** : 16 Apr 2024  
**Diagnosed** : 18 Apr 2024 - Don Baldrige

**Kemp Quarries - Pryor Stone - Pryor**  
 1050 E 520 Rd  
 Pryor, OK  
 US 74361  
 Contact:  
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: