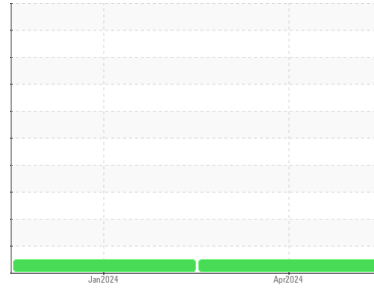


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area
(SPG405640) Air Gas - Tractor
 Machine Id
[Air Gas - Tractor] 314A314006
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0120040	PCA0096895	---
Sample Date	Client Info			02 Apr 2024	10 Jan 2024	---
Machine Age	mls	Client Info		86248	90	---
Oil Age	mls	Client Info		21803	90	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	22	35	---
Chromium	ppm	ASTM D5185m	>5	2	3	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>30	13	22	---
Lead	ppm	ASTM D5185m	>30	0	<1	---
Copper	ppm	ASTM D5185m	>150	3	18	---
Tin	ppm	ASTM D5185m	>5	<1	3	---
Vanadium	ppm	ASTM D5185m		0	<1	---
Cadmium	ppm	ASTM D5185m		0	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	2	9	---
Barium	ppm	ASTM D5185m	0	0	<1	---
Molybdenum	ppm	ASTM D5185m	50	61	60	---
Manganese	ppm	ASTM D5185m	0	<1	1	---
Magnesium	ppm	ASTM D5185m	950	951	915	---
Calcium	ppm	ASTM D5185m	1050	1097	1199	---
Phosphorus	ppm	ASTM D5185m	995	1015	980	---
Zinc	ppm	ASTM D5185m	1180	1250	1288	---
Sulfur	ppm	ASTM D5185m	2600	2926	2504	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	3	4	---
Sodium	ppm	ASTM D5185m		0	4	---
Potassium	ppm	ASTM D5185m	>20	26	40	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	21.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.1	18.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.9	7.1	---





OIL ANALYSIS REPORT

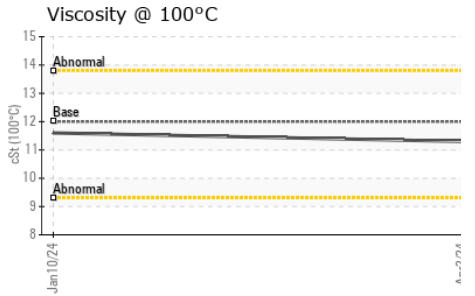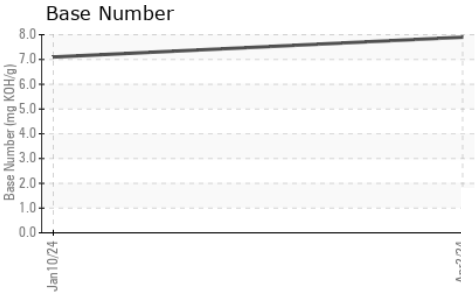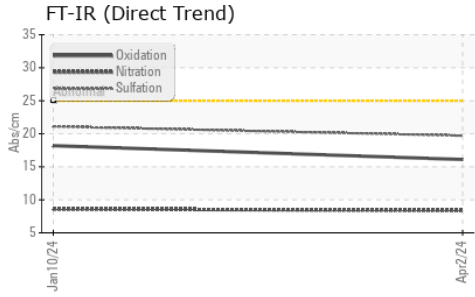

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.6

GRAPHS

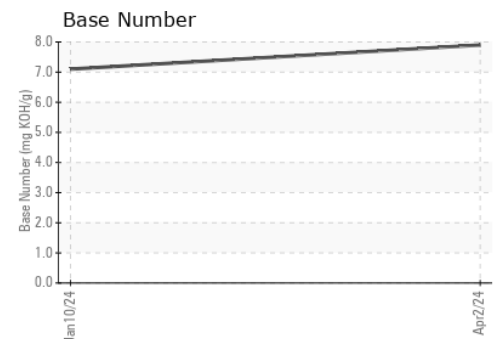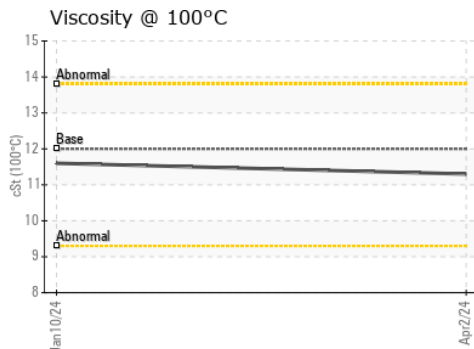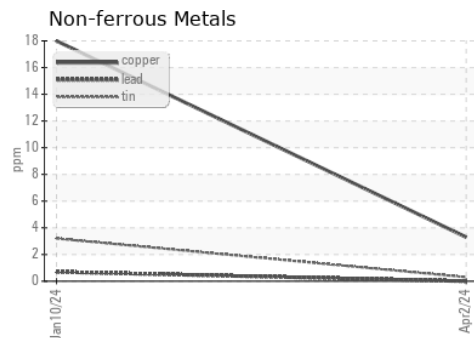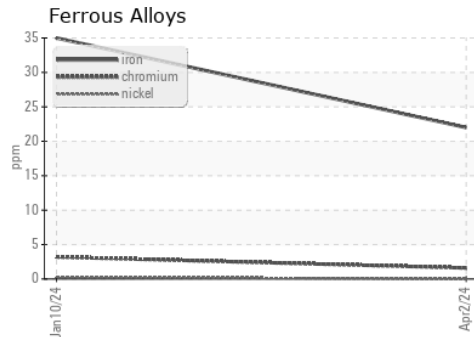

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0120040
Lab Number : **06151521**
Unique Number : 10981599
Test Package : FLEET

Received : 17 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 18 Apr 2024 - Wes Davis

Transervice - Shop 3140 - Platte River
 2455 S Platte River
 Denver, CO
 US 80223

Contact: Mike Duran
 mduran@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: