




OIL ANALYSIS REPORT

Sample Rating Trend

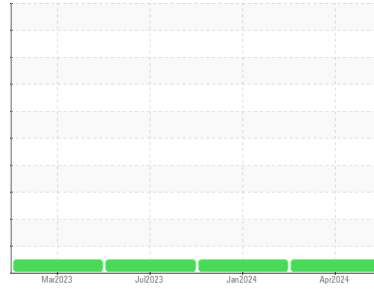

NORMAL



Area
(ML7046)

Machine Id
413073

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0090138	GFL0090126	GFL0061879
Sample Date	Client Info	16 Apr 2024	25 Jan 2024	31 Jul 2023
Machine Age	hrs Client Info	3717	3138	1937
Oil Age	hrs Client Info	3717	3138	1937
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	17	13	25
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	14	11	38
Lead	ppm ASTM D5185m >40	<1	<1	<1
Copper	ppm ASTM D5185m >330	3	2	22
Tin	ppm ASTM D5185m >15	<1	1	0
Vanadium	ppm ASTM D5185m	<1	<1	<1
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	13	<1	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	44	60	56
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	920	947	922
Calcium	ppm ASTM D5185m 1070	1170	1077	1155
Phosphorus	ppm ASTM D5185m 1150	919	1018	897
Zinc	ppm ASTM D5185m 1270	1062	1211	1184
Sulfur	ppm ASTM D5185m 2060	2982	2524	3245

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	7	4	4
Sodium	ppm ASTM D5185m	2	2	2
Potassium	ppm ASTM D5185m >20	34	21	95

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.5	0.4
Nitration	Abs/cm *ASTM D7624 >20	8.9	9.9	10.5
Sulfation	Abs/.1mm *ASTM D7415 >30	21.7	20.6	21.4

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.7	16.9	17.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.5	6.8	5.8







OIL ANALYSIS REPORT

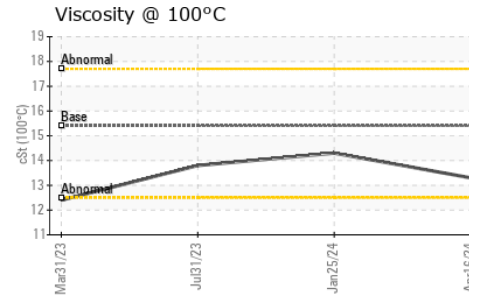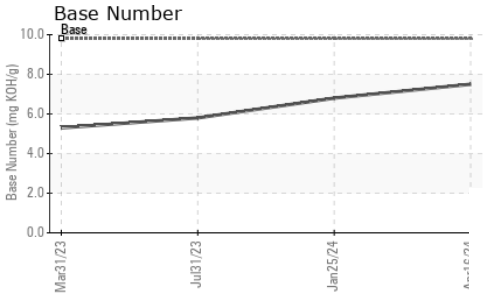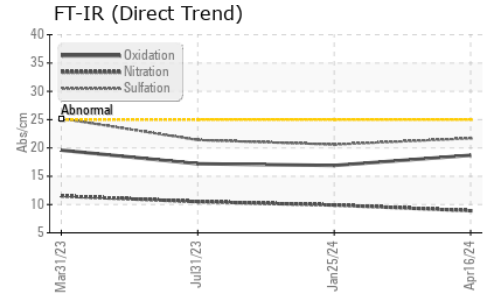

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	14.3	13.8

GRAPHS

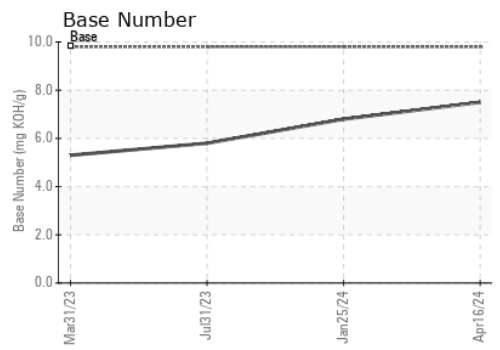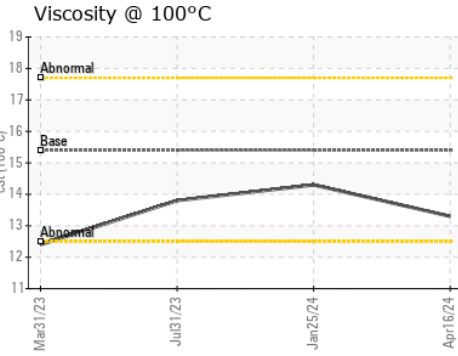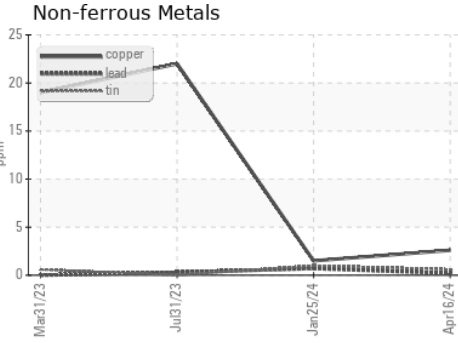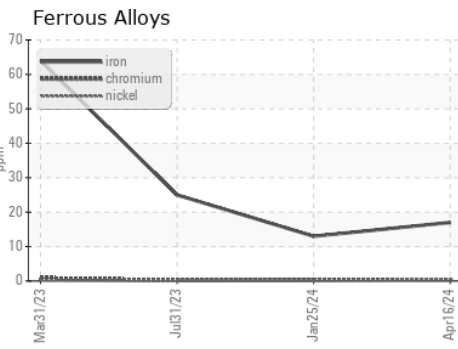

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0090138 **Received** : 19 Apr 2024
Lab Number : **06155059** **Tested** : 22 Apr 2024
Unique Number : 10990482 **Diagnosed** : 22 Apr 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 044 - Elizabeth City
 657 Old US 17
 Elizabeth City, NC
 US 27909
 Contact: TOM BAIRD
 tom.baIRD@gflenv.com
 T: (252)562-2645
 F: (252)264-4411

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)