


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

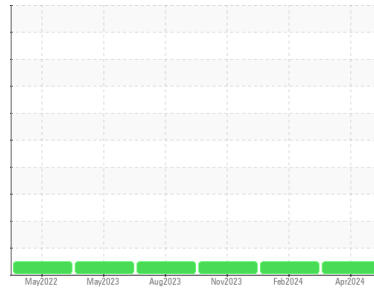

Machine Id
FORD 200 (S/N 1FM5K8D83JGA99478)
 Component
Gasoline Engine
 Fluid
PETRO CANADA SUPREME 5W20 MOTOR OIL (6 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0117713	PCA0117699	PCA0112902
Sample Date	Client Info			08 Apr 2024	08 Feb 2024	30 Nov 2023
Machine Age	mls	Client Info		90325	87090	84536
Oil Age	mls	Client Info		3235	2554	4916
Oil Changed	Client Info			Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	3	2	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	1	2	2
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>155	4	2	3
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	183	120	108	51
Barium	ppm	ASTM D5185m	0	2	0	0
Molybdenum	ppm	ASTM D5185m	36	64	65	60
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	417	586	587	481
Calcium	ppm	ASTM D5185m	1318	1182	1146	1066
Phosphorus	ppm	ASTM D5185m	773	741	775	685
Zinc	ppm	ASTM D5185m	845	842	885	772
Sulfur	ppm	ASTM D5185m	2690	3143	2896	2754

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	16	19	17
Sodium	ppm	ASTM D5185m	>400	12	3	5
Potassium	ppm	ASTM D5185m	>20	1	<1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.5	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	17.7	20.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.6	12.3	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	5.4	5.2	4.5









OIL ANALYSIS REPORT

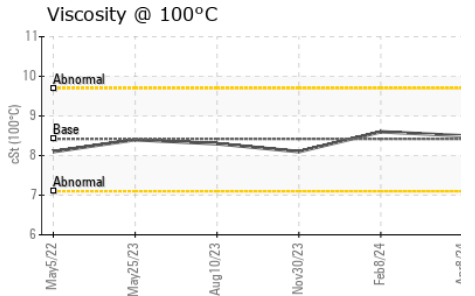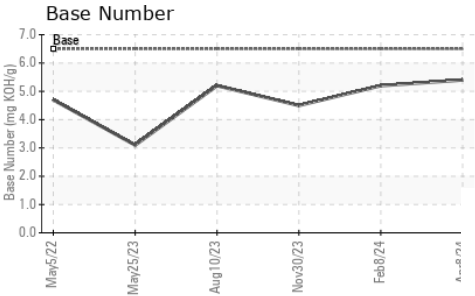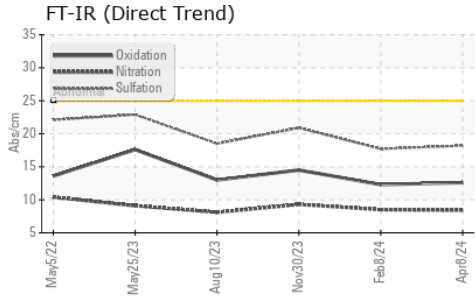

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	8.42	8.5	8.6	8.1

GRAPHS

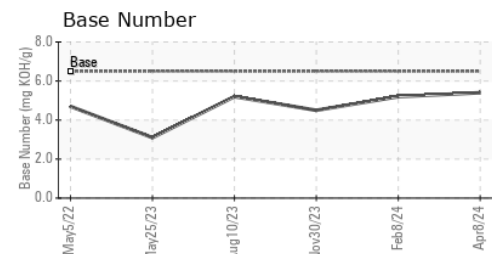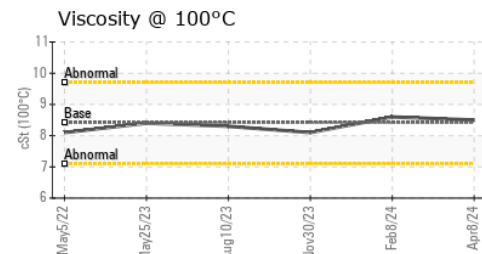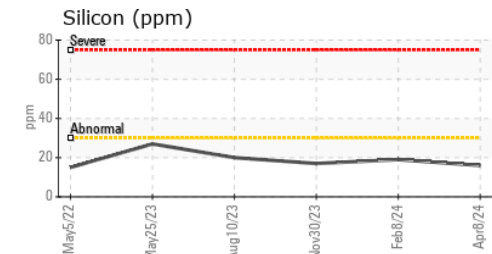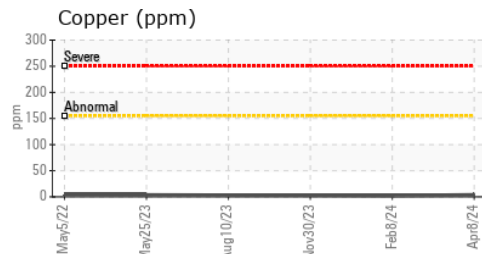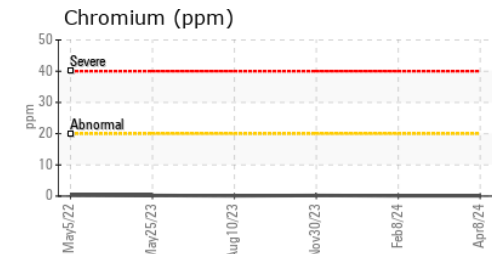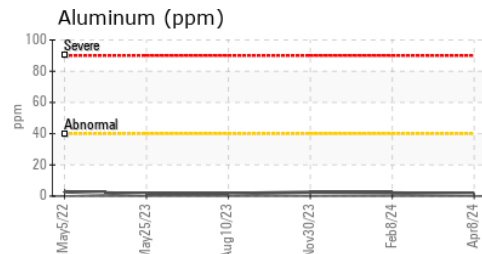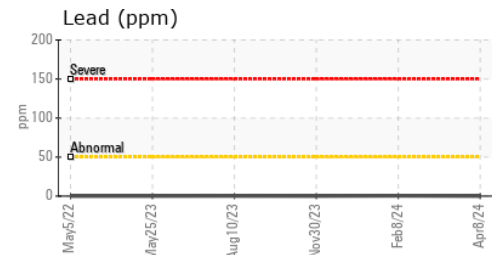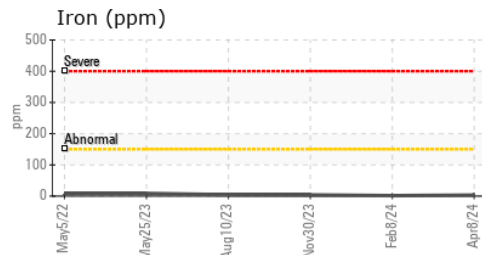

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117713 **Received** : 22 Apr 2024
Lab Number : **06155615** **Tested** : 23 Apr 2024
Unique Number : 10991038 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrdpw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)