




OIL ANALYSIS REPORT

Machine Id
814021
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

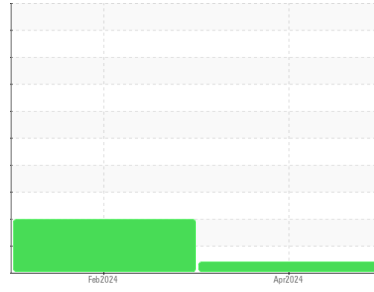

VISCOSITY



DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0078312	GFL0078298	---
Sample Date	Client Info		16 Apr 2024	12 Feb 2024	---
Machine Age	hrs	Client Info	608	151	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			ATTENTION	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	43	21	---
Chromium	ppm	ASTM D5185m >20	2	1	---
Nickel	ppm	ASTM D5185m >5	12	3	---
Titanium	ppm	ASTM D5185m >2	<1	<1	---
Silver	ppm	ASTM D5185m >2	<1	<1	---
Aluminum	ppm	ASTM D5185m >20	7	5	---
Lead	ppm	ASTM D5185m >40	0	<1	---
Copper	ppm	ASTM D5185m >330	199	11	---
Tin	ppm	ASTM D5185m >15	4	3	---
Vanadium	ppm	ASTM D5185m	<1	<1	---
Cadmium	ppm	ASTM D5185m	<1	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	160	425	---
Barium	ppm	ASTM D5185m 0	2	0	---
Molybdenum	ppm	ASTM D5185m 60	123	125	---
Manganese	ppm	ASTM D5185m 0	6	5	---
Magnesium	ppm	ASTM D5185m 1010	687	656	---
Calcium	ppm	ASTM D5185m 1070	1398	1379	---
Phosphorus	ppm	ASTM D5185m 1150	667	686	---
Zinc	ppm	ASTM D5185m 1270	837	779	---
Sulfur	ppm	ASTM D5185m 2060	2271	2676	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	68	▲ 88	---
Sodium	ppm	ASTM D5185m	4	0	---
Potassium	ppm	ASTM D5185m >20	7	7	---
Fuel	%	ASTM D3524 >3.0	<1.0	0.4	---

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.5	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	10.6	6.9	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.5	26.0	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	23.1	20.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.2	9.3	---







OIL ANALYSIS REPORT

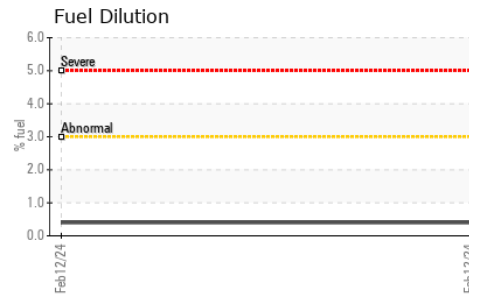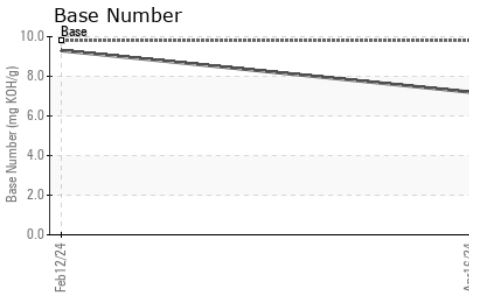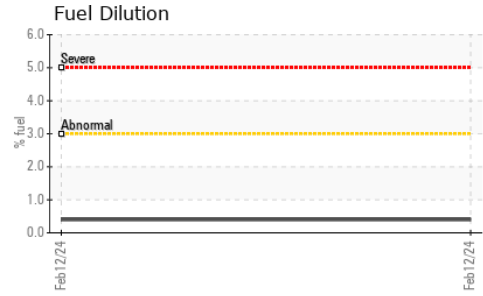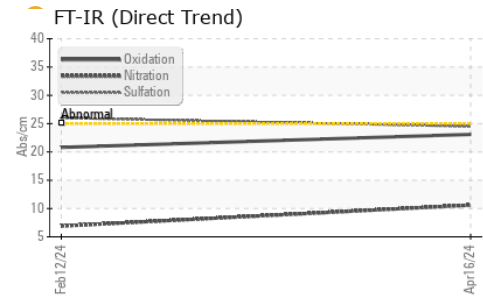

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	● 10.0	● 9.4

GRAPHS

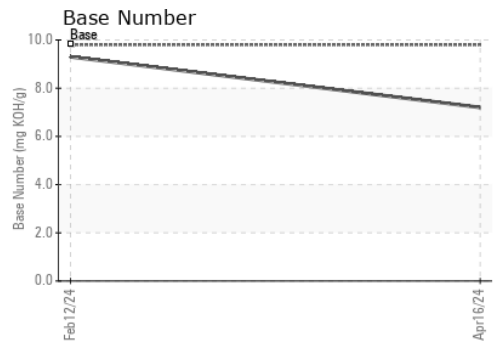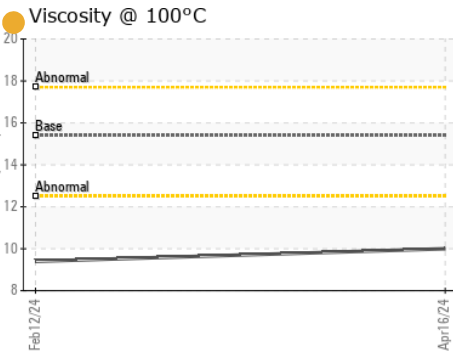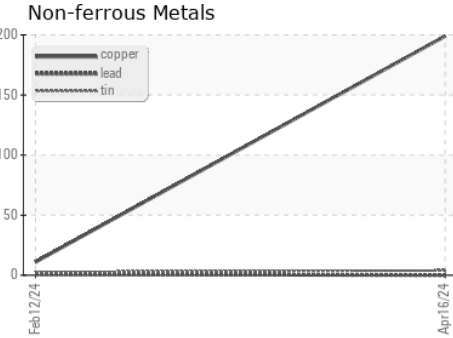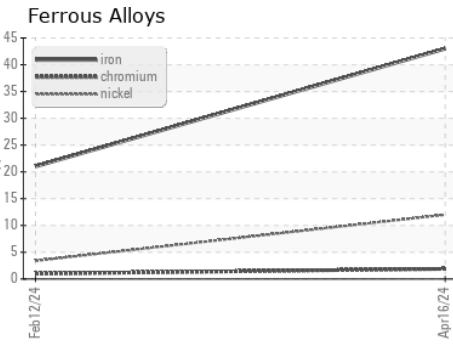

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0078312

Lab Number : 06156608

Unique Number : 10992031

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 22 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 24 Apr 2024 - Jonathan Hester

GFL Environmental - 846 - Mayfield Hauling

3426 State Route 45

Mayfield, KY

US 42066

Contact: Jack Lindsey

jack.lindsey@gflenv.com

T: (270)970-3690

F: