


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

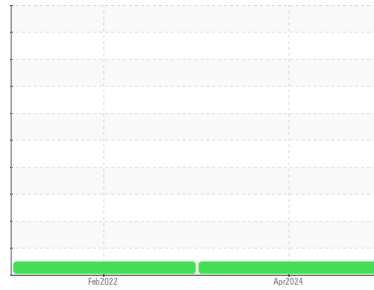

Area  
**K5 CONSTRUCTION CORPORATION - HODGKINS IL**  
 Machine Id  
**2028**  
 Component  
**Top Right Conveyor Gearbox**  
 Fluid  
**LEAHY WOLF SYNMASTER 75W90 (1 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0122096</b>	LW0004295	---
Sample Date	Client Info			<b>19 Apr 2024</b>	11 Feb 2022	---
Machine Age	hrs	Client Info		<b>5847</b>	5818	---
Oil Age	hrs	Client Info		<b>29</b>	395	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>73</b>	160	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	3	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	25	---
Aluminum	ppm	ASTM D5185m		<b>2</b>	<1	---
Lead	ppm	ASTM D5185m		<b>1</b>	<1	---
Copper	ppm	ASTM D5185m		<b>2</b>	2	---
Tin	ppm	ASTM D5185m		<b>1</b>	0	---
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	328	<b>291</b>	328	---
Barium	ppm	ASTM D5185m	1	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>2</b>	3	---
Magnesium	ppm	ASTM D5185m	1	<b>2</b>	1	---
Calcium	ppm	ASTM D5185m	7	<b>35</b>	73	---
Phosphorus	ppm	ASTM D5185m	1145	<b>1344</b>	1279	---
Zinc	ppm	ASTM D5185m	3	<b>28</b>	29	---
Sulfur	ppm	ASTM D5185m	17909	<b>27117</b>	18898	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<b>9</b>	15	---
Sodium	ppm	ASTM D5185m		<b>0</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

# OIL ANALYSIS REPORT

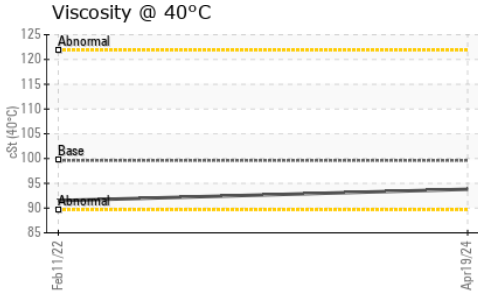









### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	99.6	93.8	91.5	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS

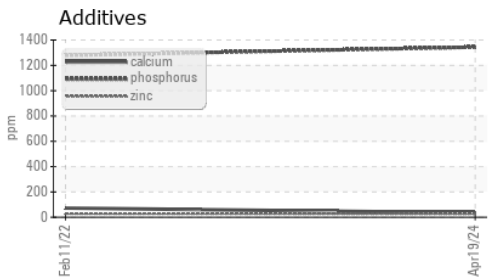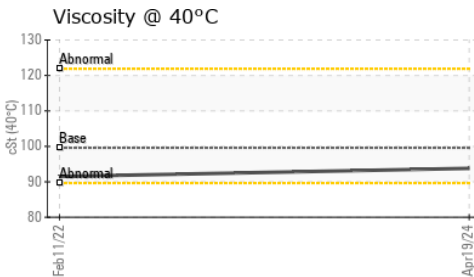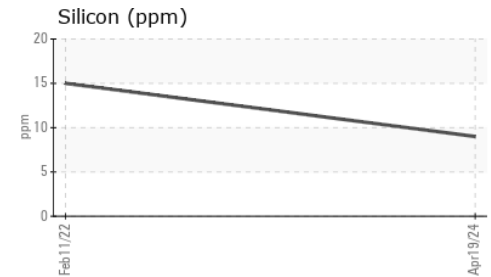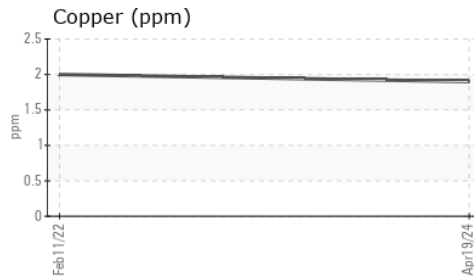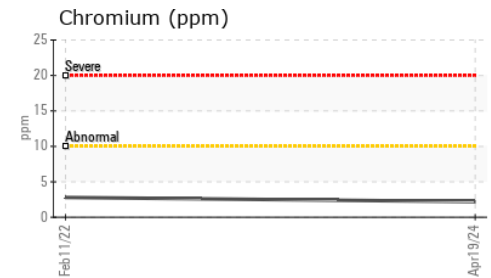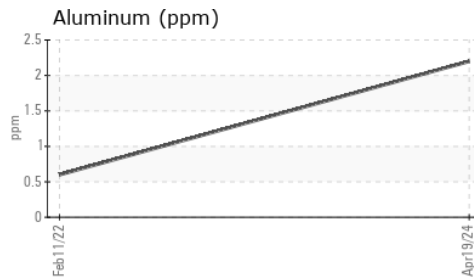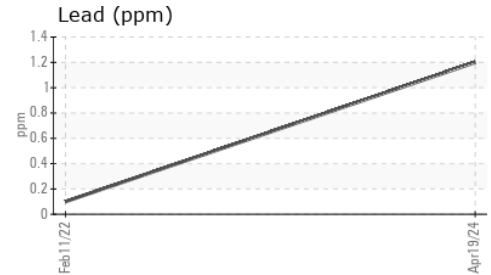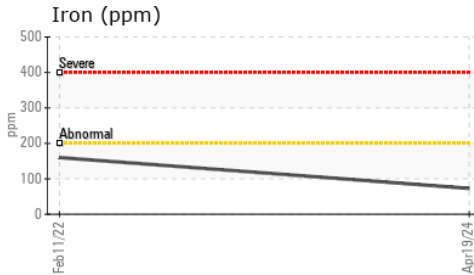

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122096      **Received** : 24 Apr 2024  
**Lab Number** : 06159935      **Tested** : 25 Apr 2024  
**Unique Number** : 10995358      **Diagnosed** : 26 Apr 2024 - Don Baldrige  
**Test Package** : MOB 1

**K5 CONSTRUCTION CORPORATION**  
 6301 S EAST AVENUE  
 HODGKINS, IL  
 US 60525  
 Contact: FRANCISCO MUNOZ  
 francisco@k-five.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: