




# PROBLEM SUMMARY




Area  
**(MC11906)**  
 Machine Id  
**824019-254**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## Sample Rating Trend

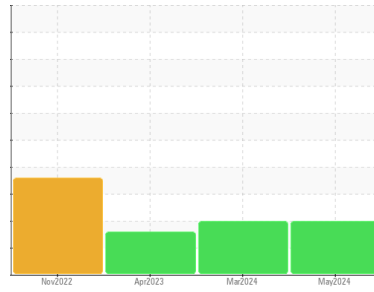

## COMPONENT CONDITION SUMMARY

### ▲ Fuel Dilution

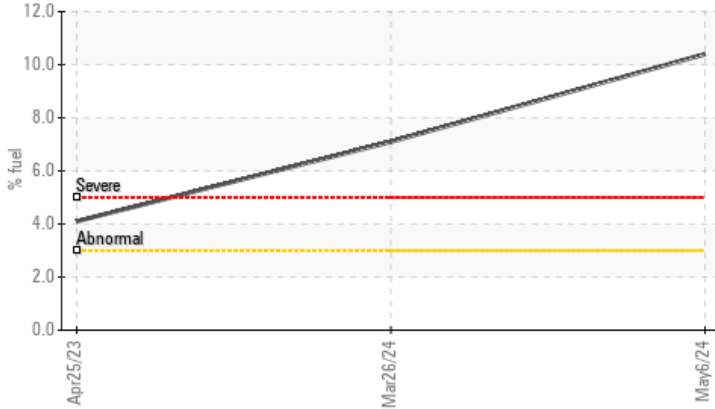

## RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Fuel	%	ASTM D3524	>3.0	▲ 10.4	▲ 7.1	▲ 4.1

Customer Id: GFL904A  
 Sample No.: GFL0120572  
 Lab Number: 06178348  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS

### FUEL



#### 26 Mar 2024 Diag: Wes Davis

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



### SOOT



#### 25 Apr 2023 Diag: Wes Davis

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Light concentration of carbon/soot present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



### SOOT



#### 16 Nov 2022 Diag: Jonathan Hester

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value. All component wear rates are normal. There is an abnormal amount of solids and carbon present in the oil. The oil viscosity is higher than normal. The BN level is low.

[view report](#)






# OIL ANALYSIS REPORT

## Sample Rating Trend

FUEL

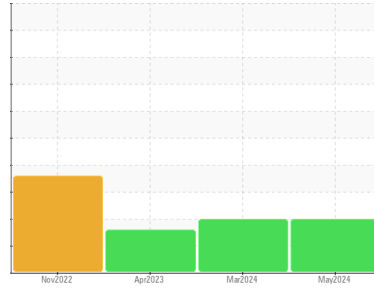

Area  
**(MC11906)**  
Machine Id  
**824019-254**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**



## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0120572</b>	GFL0108443	GFL0060343
Sample Date	Client Info	<b>06 May 2024</b>	26 Mar 2024	25 Apr 2023
Machine Age	hrs	<b>0</b>	0	7715
Oil Age	hrs	<b>0</b>	0	500
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed
Sample Status		<b>SEVERE</b>	SEVERE	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>7</b>	22	41
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	1
Nickel	ppm ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	5	6
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	1
Copper	ppm ASTM D5185m >330	<b>2</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	4	15
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	58	67
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>933</b>	906	858
Calcium	ppm ASTM D5185m 1070	<b>1060</b>	1065	1080
Phosphorus	ppm ASTM D5185m 1150	<b>992</b>	1009	937
Zinc	ppm ASTM D5185m 1270	<b>1154</b>	1191	1140
Sulfur	ppm ASTM D5185m 2060	<b>3520</b>	3232	3269

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	5
Sodium	ppm ASTM D5185m	<b>3</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>0</b>	<1	1
Fuel	% ASTM D3524 >3.0	<b>▲ 10.4</b>	▲ 7.1	▲ 4.1

## INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>1.1</b>	2.2	▲ 4
Nitration	Abs/cm *ASTM D7624 >20	<b>6.3</b>	8.9	10.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.0</b>	21.0	26.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.2</b>	14.1	16.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.0</b>	8.8	5.7







# OIL ANALYSIS REPORT

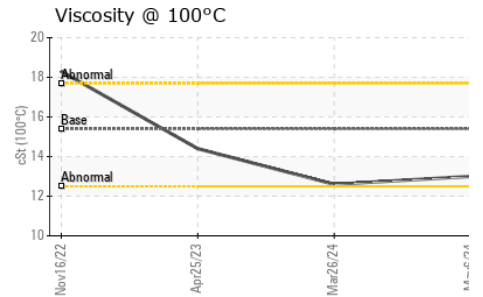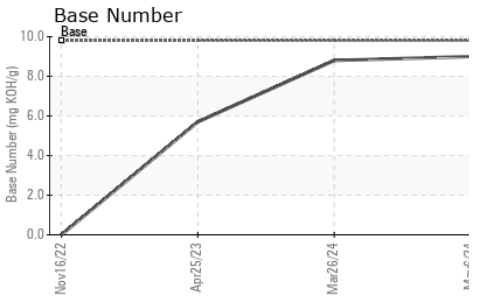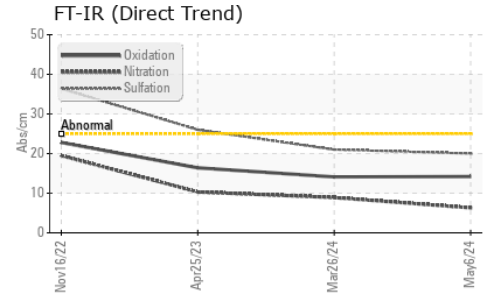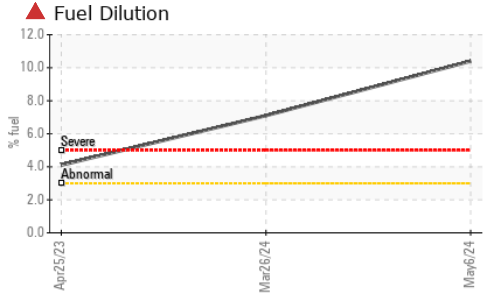

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	12.6	14.4

## GRAPHS

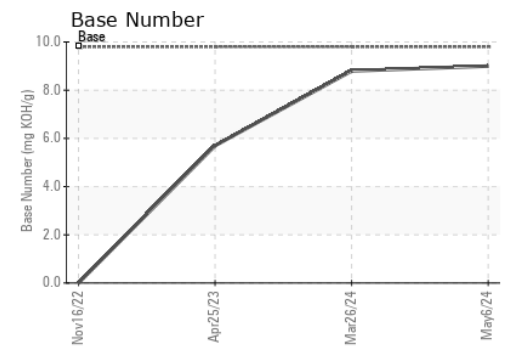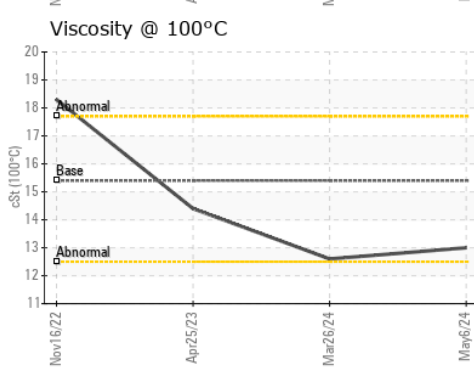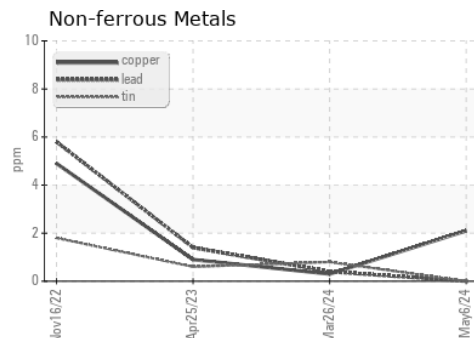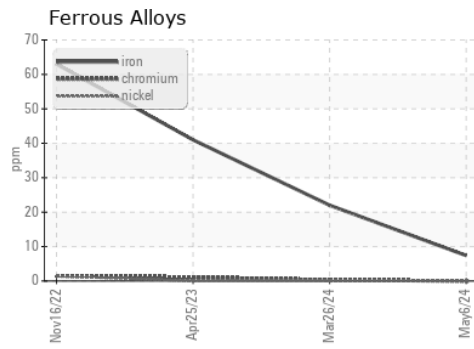

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0120572      **Received** : 14 May 2024  
**Lab Number** : 06178348      **Tested** : 16 May 2024  
**Unique Number** : 11029674      **Diagnosed** : 16 May 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 904A - Thorpe**  
 N14985 Tieman Ave  
 Thorp, WI  
 US 54771  
 Contact: Andy Kane  
 akane@gflenv.com  
 T: (715)202-3420  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)