


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / RIVER VALLEY OZARK**  
Machine Id  
**WL112**  
Component  
**Rear Left Final Drive**  
Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

Sample Rating Trend

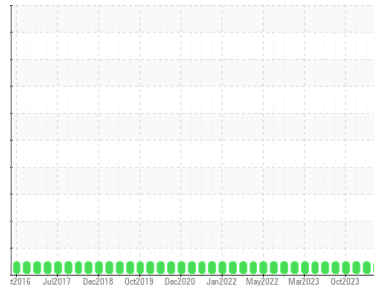

**NORMAL**



**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0109103</b>	PCA0069705	PCA0084500
Sample Date	Client Info			<b>17 May 2024</b>	19 Mar 2024	09 Feb 2024
Machine Age	hrs	Client Info		<b>36272</b>	35919	35658
Oil Age	hrs	Client Info		<b>31552</b>	31552	31552
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>800	<b>59</b>	55	47
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>75	<b>&lt;1</b>	3	2
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>75	<b>1</b>	2	2
Tin	ppm	ASTM D5185m	>8	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	0
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	1	<1
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	9	<b>17</b>	16	15
Calcium	ppm	ASTM D5185m	3114	<b>3593</b>	3966	3444
Phosphorus	ppm	ASTM D5185m	1099	<b>1088</b>	1090	1107
Zinc	ppm	ASTM D5185m	1245	<b>1310</b>	1333	1197
Sulfur	ppm	ASTM D5185m	7086	<b>5063</b>	4885	5728

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>400	<b>23</b>	22	21
Sodium	ppm	ASTM D5185m		<b>2</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	2

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








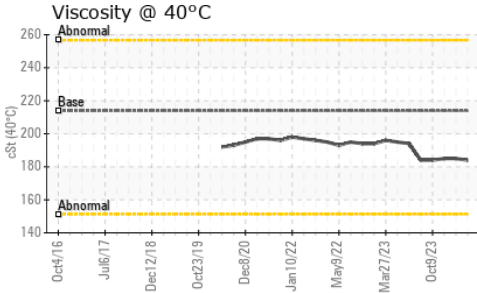


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	<b>184</b>	185	185

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

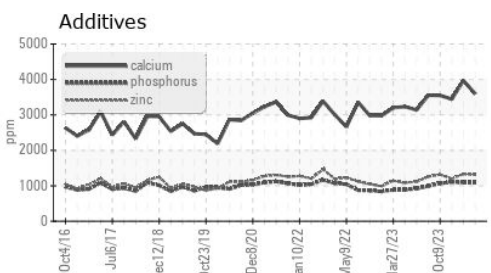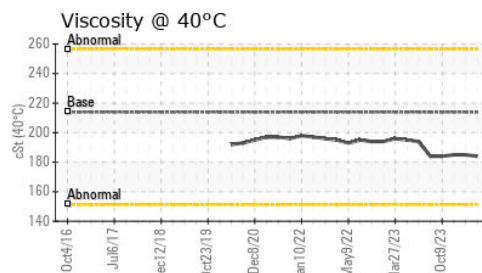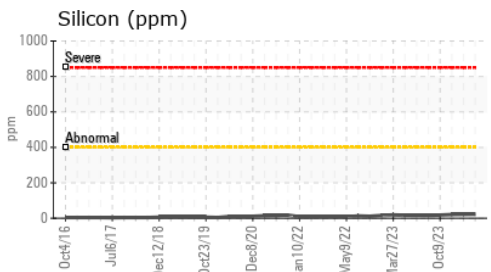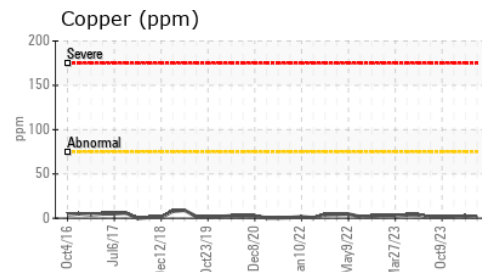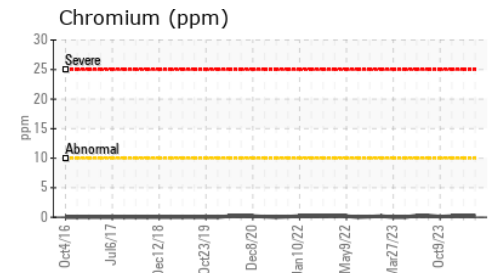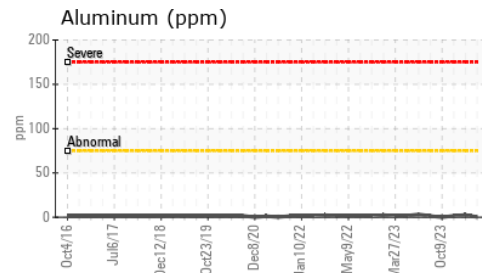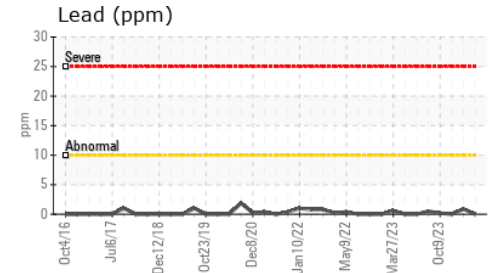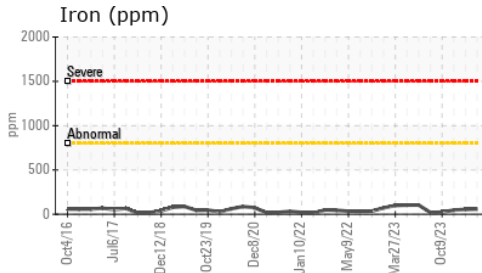

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109103  
**Lab Number** : 06191353  
**Unique Number** : 11048105  
**Test Package** : MOB 1

**Received** : 24 May 2024  
**Tested** : 28 May 2024  
**Diagnosed** : 28 May 2024 - Wes Davis

**Kemp Quarries - River Valley - Ozark**  
 9446 N Hwy 309  
 Ozark, AR  
 US 72949

Contact: OZARK NOTIFICATIONS  
 ozark@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: