


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

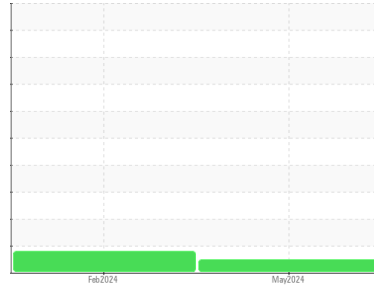

Area  
**(N/A) Preferred Service-Yard Horse**  
 Machine Id  
**[Preferred Service-Yard Horse] 192A03-9090**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (16 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0123679</b>	PCA0116669	---
Sample Date	Client Info			<b>23 May 2024</b>	20 Feb 2024	---
Machine Age	hrs	Client Info		<b>21899</b>	21003	---
Oil Age	hrs	Client Info		<b>896</b>	1250	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---	
Water	WC Method	>0.2	<b>NEG</b>	NEG	---	
Glycol	WC Method		<b>NEG</b>	NEG	---	

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>43</b>	▲ 111	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	10	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>3</b>	<1	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>62</b>	68	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>981</b>	1063	---
Calcium	ppm	ASTM D5185m	1050	<b>1119</b>	1182	---
Phosphorus	ppm	ASTM D5185m	995	<b>1042</b>	1212	---
Zinc	ppm	ASTM D5185m	1180	<b>1288</b>	1365	---
Sulfur	ppm	ASTM D5185m	2600	<b>3144</b>	3428	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	7	---
Sodium	ppm	ASTM D5185m		<b>4</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	13.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	24.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.8</b>	25.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.8</b>	6.0	---





# OIL ANALYSIS REPORT

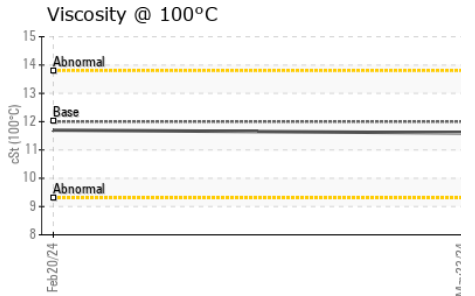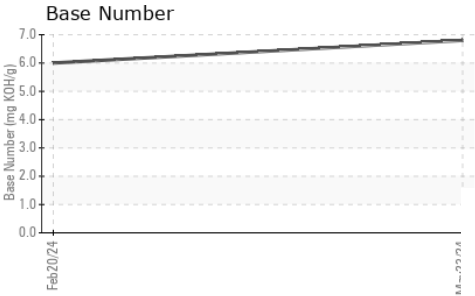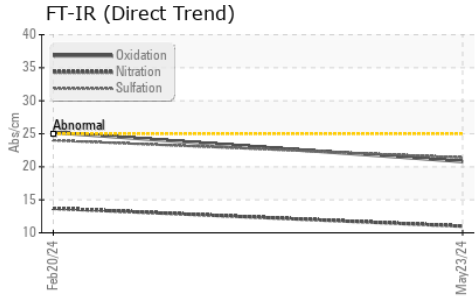

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.6	11.7

## GRAPHS

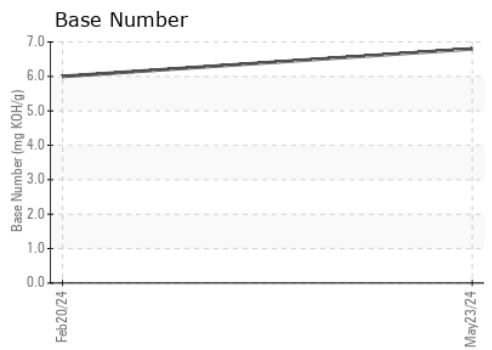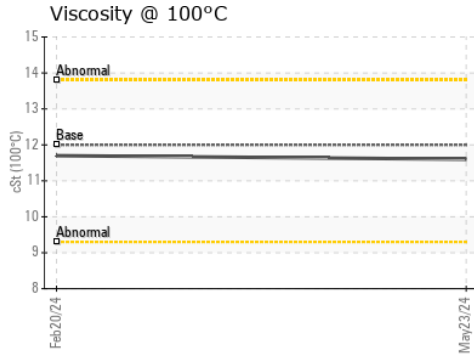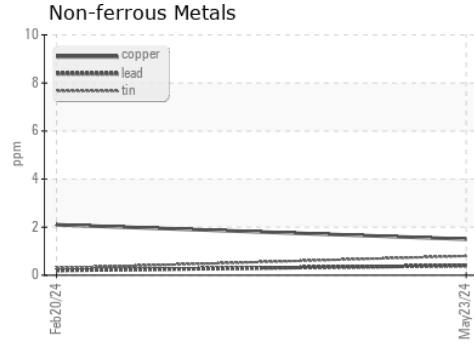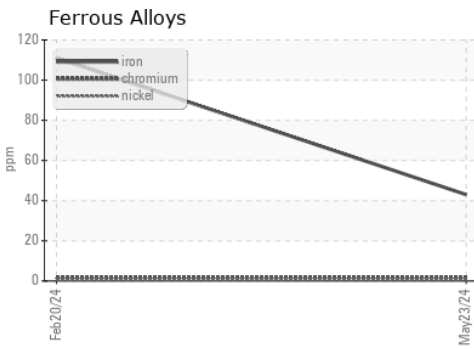

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0123679  
**Lab Number** : 06191845  
**Unique Number** : 11048597  
**Test Package** : FLEET

**Received** : 28 May 2024  
**Tested** : 29 May 2024  
**Diagnosed** : 29 May 2024 - Wes Davis

**Transervice - Shop 1920 - Preferred Service**  
 1955 W. North Avenue, Bldg K  
 Melrose Park, IL  
 US 60160

Contact: Tom Lindeman  
 tlindemann@transervice.com  
 T: (630)376-8946

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)