


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

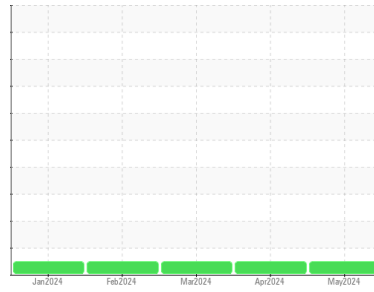

Area
FLOUR LOADOUT LEG
 Machine Id
LOADOUT LEG
 Component
Gearbox
 Fluid
HYDROTEX Ultra-Kleen ISO 220 (13 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0123405	PCA0123396	PCA0113074
Sample Date	Client Info			15 May 2024	16 Apr 2024	13 Mar 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		29	24	27
Iron	ppm	ASTM D5185m	>200	179	77	160
Chromium	ppm	ASTM D5185m	>15	<1	0	<1
Nickel	ppm	ASTM D5185m	>15	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	2
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>200	2	0	<1
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		71	70	71
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		2	<1	1
Magnesium	ppm	ASTM D5185m		1	0	0
Calcium	ppm	ASTM D5185m		5	0	0
Phosphorus	ppm	ASTM D5185m		372	434	395
Zinc	ppm	ASTM D5185m		28	55	23
Sulfur	ppm	ASTM D5185m		9213	10404	11488

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	9	11	7
Sodium	ppm	ASTM D5185m		0	2	4
Potassium	ppm	ASTM D5185m	>20	3	<1	0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.90	0.84	0.88


OIL ANALYSIS REPORT

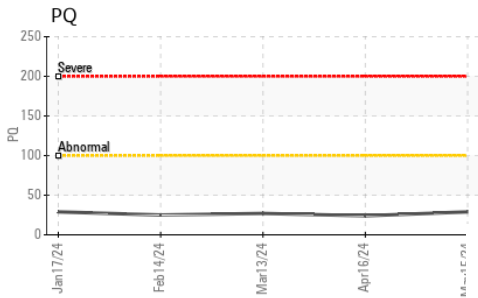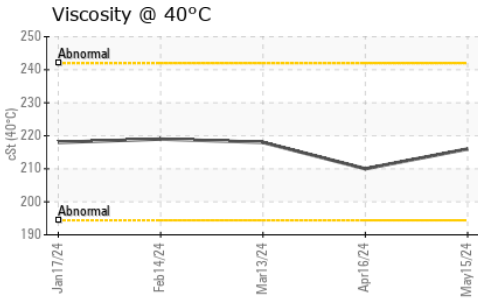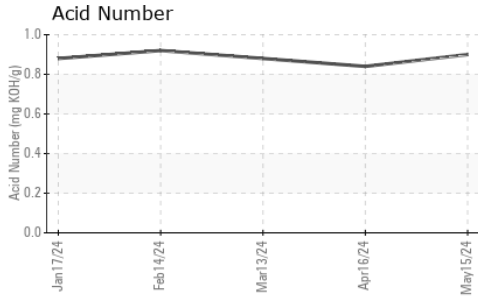






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	216	210	218

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

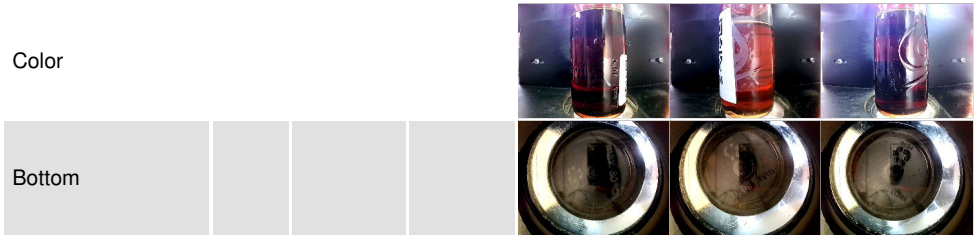

GRAPHS

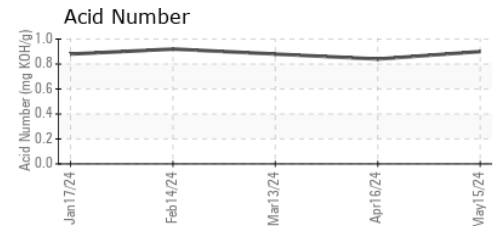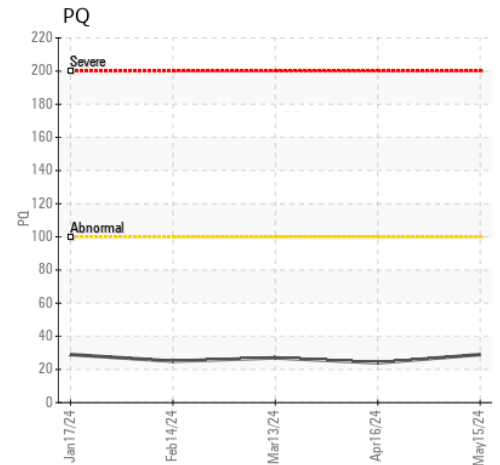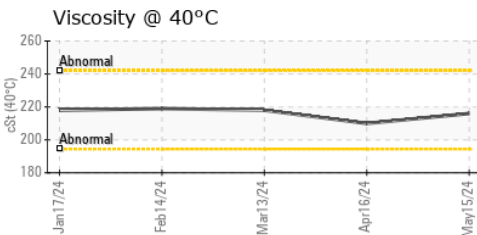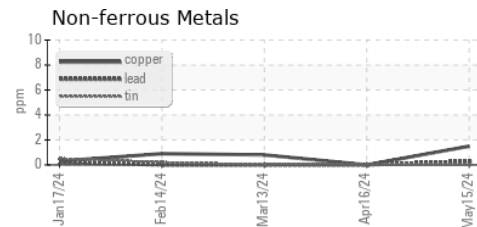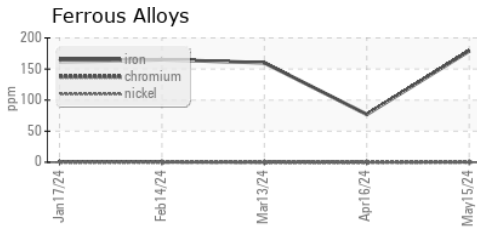

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123405
Lab Number : 06192979
Unique Number : 11049731
Test Package : PLANT

Received : 28 May 2024
Tested : 05 Jun 2024
Diagnosed : 05 Jun 2024 - Jonathan Hester

Ardent Mills - Stockton
 3939 Producers Dr
 Stockton, CA
 US 95206

Contact: Noel Garcia
 noel.garcia@ardentmills.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: