




OIL ANALYSIS REPORT

Sample Rating Trend

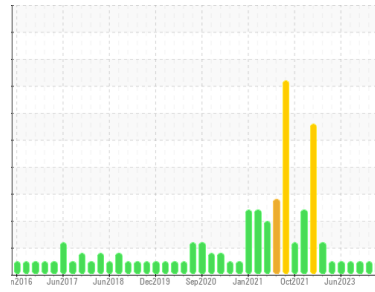

NORMAL



Machine Id
10529
 Component
Diesel Engine
 Fluid

DIESEL ENGINE OIL SAE 15W40 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0122656	GFL0103423	GFL0074616
Sample Date	Client Info			26 May 2024	03 Mar 2024	12 Jan 2024
Machine Age	hrs	Client Info		24688	23585	23280
Oil Age	hrs	Client Info		593	0	192
Oil Changed	Client Info			Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	44	53	26
Chromium	ppm	ASTM D5185m	>5	1	2	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>15	5	6	3
Lead	ppm	ASTM D5185m	>25	2	2	2
Copper	ppm	ASTM D5185m	>100	30	48	9
Tin	ppm	ASTM D5185m	>4	1	1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	9	34	59
Barium	ppm	ASTM D5185m	10	0	3	2
Molybdenum	ppm	ASTM D5185m	100	63	57	56
Manganese	ppm	ASTM D5185m		2	3	2
Magnesium	ppm	ASTM D5185m	450	840	520	536
Calcium	ppm	ASTM D5185m	3000	1145	1565	1531
Phosphorus	ppm	ASTM D5185m	1150	900	749	788
Zinc	ppm	ASTM D5185m	1350	1119	930	908
Sulfur	ppm	ASTM D5185m	4250	2933	2719	2722

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	23	20
Sodium	ppm	ASTM D5185m	>158	8	6	5
Potassium	ppm	ASTM D5185m	>20	5	4	2


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.7	0.5	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.9	10.5	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.9	21.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.0	22.0	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.2	7.3	9.6




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

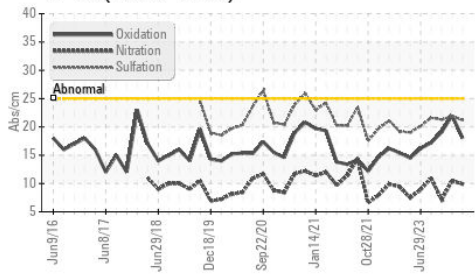

Base Number

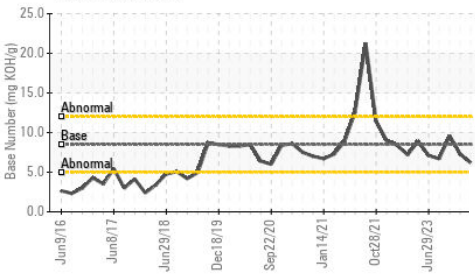

Viscosity @ 100°C

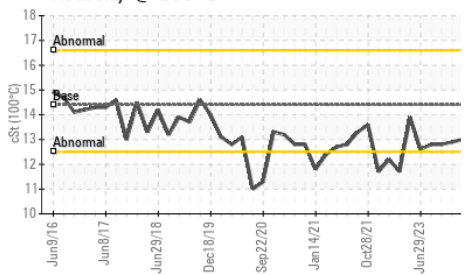


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	12.9	12.8

GRAPHS


Ferrous Alloys

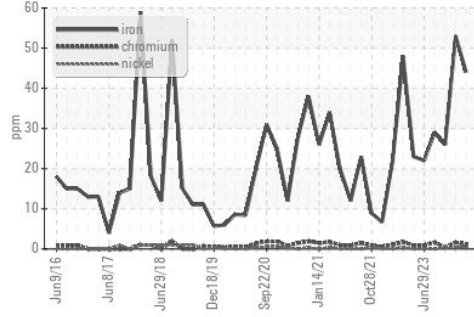


Non-ferrous Metals

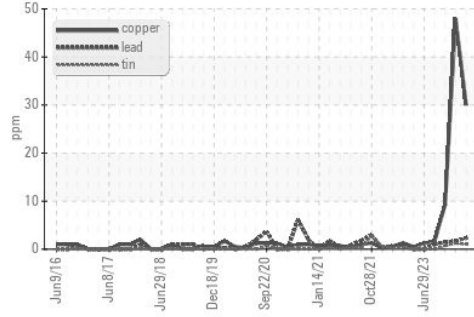

Viscosity @ 100°C

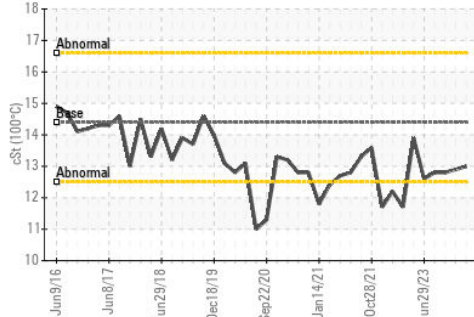

Base Number

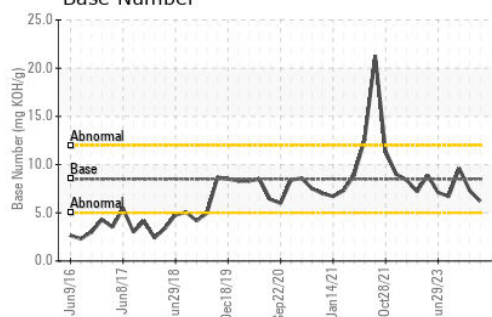

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122656 **Received** : 29 May 2024
Lab Number : **06193710** **Tested** : 30 May 2024
Unique Number : 11050462 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 095 - Atlanta West
 2699 Cochran Industrial Blvd
 Douglasville, GA
 US 30127-1332
 Contact: Darrell Welch
 darrell.welch@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)