


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

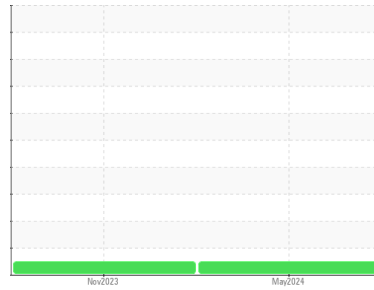

Area
ELEVATOR
 Machine Id
[ELEVATOR] MTU260 BLENDING DRAG
 Component
Gearbox
 Fluid
GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL ISO 220. Please confirm.

NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0125319	PCA0108399	---
Sample Date	Client Info		29 May 2024	08 Nov 2023	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		40	---	---
Iron	ppm	ASTM D5185m >200	49	49	---
Chromium	ppm	ASTM D5185m >15	0	<1	---
Nickel	ppm	ASTM D5185m >15	0	0	---
Titanium	ppm	ASTM D5185m	0	<1	---
Silver	ppm	ASTM D5185m	0	3	---
Aluminum	ppm	ASTM D5185m >25	0	3	---
Lead	ppm	ASTM D5185m >100	0	0	---
Copper	ppm	ASTM D5185m >200	1	2	---
Tin	ppm	ASTM D5185m >25	0	0	---
Vanadium	ppm	ASTM D5185m	0	<1	---
Cadmium	ppm	ASTM D5185m	0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	0	0	---
Barium	ppm	ASTM D5185m 15	<1	8	---
Molybdenum	ppm	ASTM D5185m 15	0	0	---
Manganese	ppm	ASTM D5185m	1	<1	---
Magnesium	ppm	ASTM D5185m 50	0	2	---
Calcium	ppm	ASTM D5185m 50	11	14	---
Phosphorus	ppm	ASTM D5185m 350	324	388	---
Zinc	ppm	ASTM D5185m 100	6	12	---
Sulfur	ppm	ASTM D5185m 12500	13613	13809	---




CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	2	2	---
Sodium	ppm	ASTM D5185m	<1	0	---
Potassium	ppm	ASTM D5185m >20	0	<1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.85	0.74	0.76	---

OIL ANALYSIS REPORT

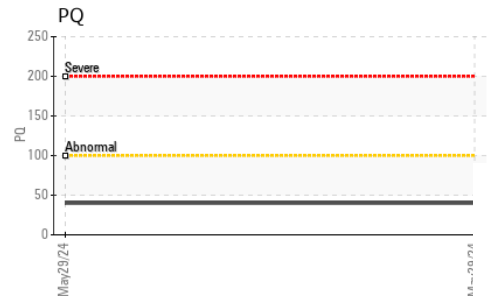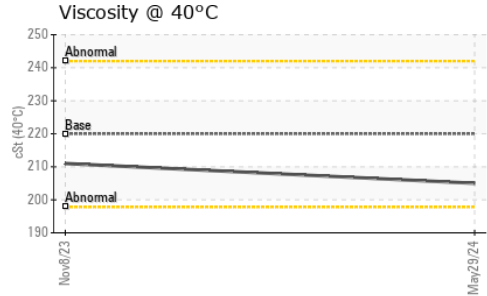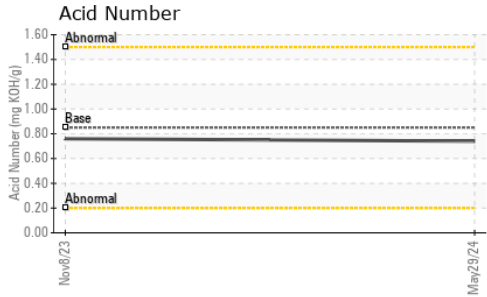



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	205	211



SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color






no image

Bottom

no image

GRAPHS

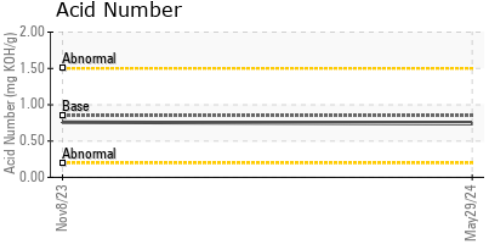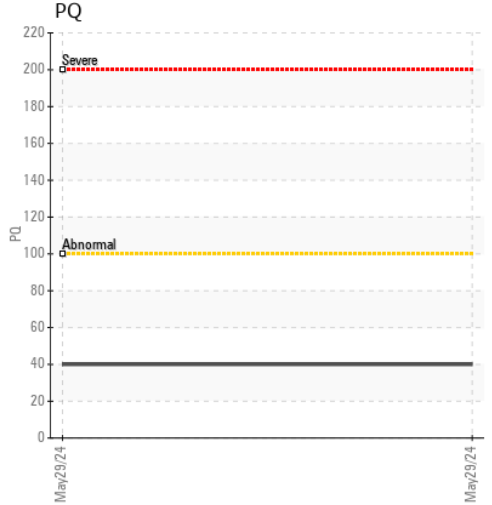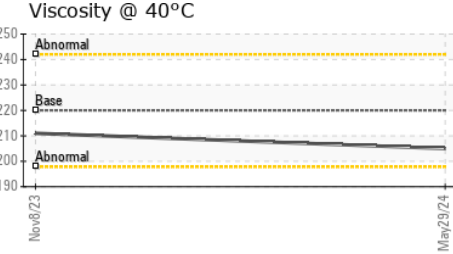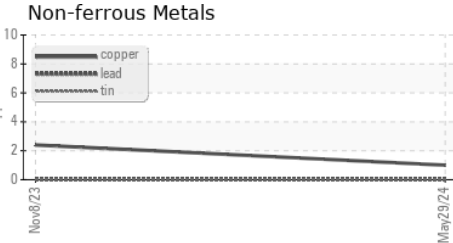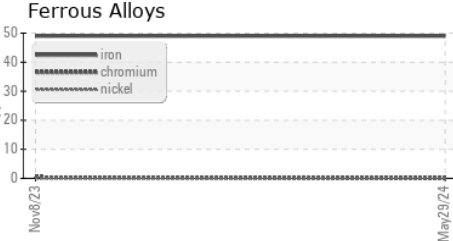

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0125319
Lab Number : 06197847
Unique Number : 11059970
Test Package : PLANT

Received : 03 Jun 2024
Tested : 04 Jun 2024
Diagnosed : 04 Jun 2024 - Wes Davis

Ardent Mills - Summit - Mount Pocono
 258 HARVEST LANE
 SUMMIT, PA
 US 18346

Contact: MICHAL NOWAK
 MICHAL.NOWAK@ARDENTMILLS.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (570)839-8322
 F: (570)839-8327