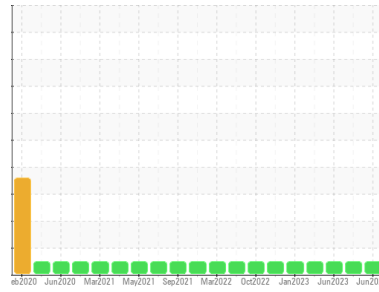


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
1926759
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (8 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0124275	PCA0101174	PCA0099516
Sample Date	Client Info			02 Jun 2024	27 Aug 2023	17 Jun 2023
Machine Age	mls	Client Info		476500	411631	391370
Oil Age	mls	Client Info		40000	40000	20000
Oil Changed	Client Info			Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	26	35	21
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	1	2	1
Titanium	ppm	ASTM D5185m		14	2	2
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	5	3
Lead	ppm	ASTM D5185m	>40	2	<1	0
Copper	ppm	ASTM D5185m	>330	6	5	4
Tin	ppm	ASTM D5185m	>15	1	1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

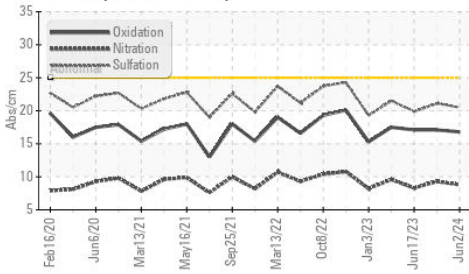
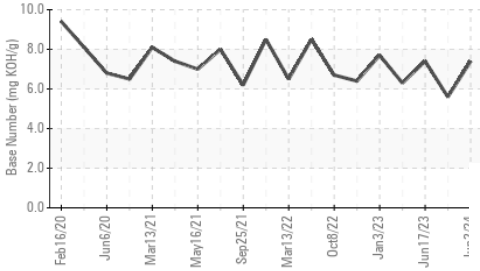
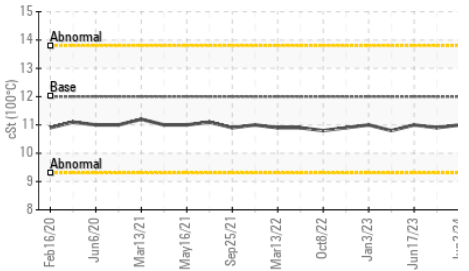
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	11	1	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	47	63	54
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	950	829	957	896
Calcium	ppm	ASTM D5185m	1050	1255	1147	1111
Phosphorus	ppm	ASTM D5185m	995	1065	985	959
Zinc	ppm	ASTM D5185m	1180	1241	1265	1189
Sulfur	ppm	ASTM D5185m	2600	3636	3298	3434

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	6	4
Sodium	ppm	ASTM D5185m		8	16	11
Potassium	ppm	ASTM D5185m	>20	7	2	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.8	9.3	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	21.1	19.9

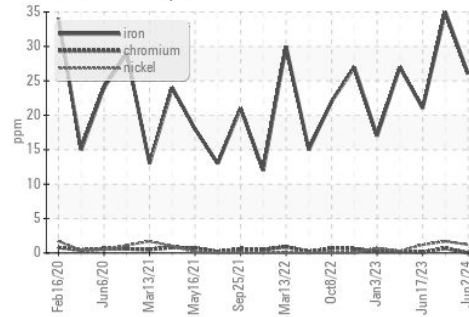
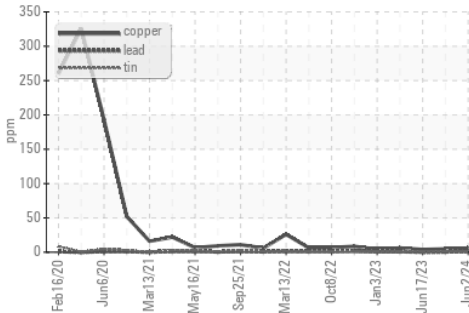
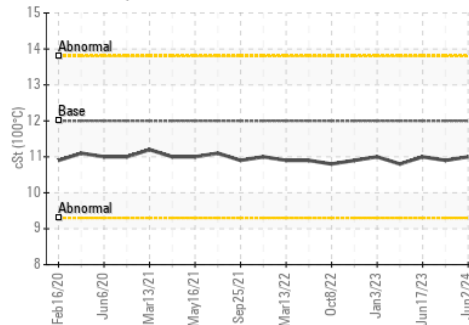
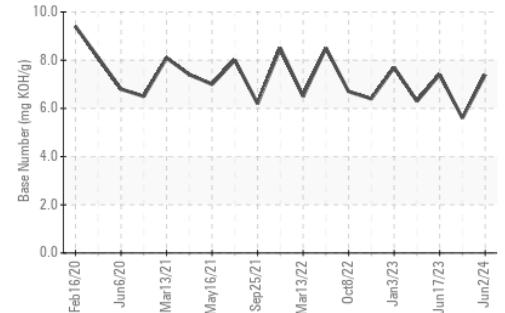
FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	17.1	17.1
Base Number (BN)	mg KOH/g	ASTM D2896		7.4	5.6	7.4

OIL ANALYSIS REPORT

FT-IR (Direct Trend)

Base Number

Viscosity @ 100°C


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.0	10.9

GRAPHS
Ferrous Alloys

Non-ferrous Metals

Viscosity @ 100°C

Base Number


Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0124275 **Received** : 06 Jun 2024
Lab Number : 06201210 **Tested** : 07 Jun 2024
Unique Number : 11063333 **Diagnosed** : 07 Jun 2024 - Wes Davis
Test Package : FLEET

PERDUE FARMS - SALISBURY
 7036 ZION CHURCH ROAD
 SALISBURY, MD
 US 21802
 Contact: RICHARD O'NEAL
 richard.oneal@perdue.com
 T: (410)543-3628
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)