


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

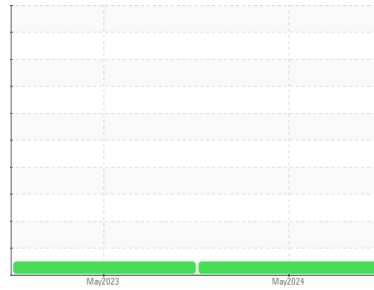

Machine Id  
**326770**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0121056</b>	PCA0097772	---
Sample Date	Client Info			<b>10 May 2024</b>	12 May 2023	---
Machine Age	mls	Client Info		<b>224002</b>	34683	---
Oil Age	mls	Client Info		<b>0</b>	34683	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>48</b>	74	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	3	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>24</b>	36	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>12</b>	40	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>2</b>	23	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m	50	<b>62</b>	50	---
Manganese	ppm	ASTM D5185m	0	<b>2</b>	6	---
Magnesium	ppm	ASTM D5185m	950	<b>892</b>	537	---
Calcium	ppm	ASTM D5185m	1050	<b>1247</b>	1601	---
Phosphorus	ppm	ASTM D5185m	995	<b>929</b>	743	---
Zinc	ppm	ASTM D5185m	1180	<b>1195</b>	957	---
Sulfur	ppm	ASTM D5185m	2600	<b>3229</b>	2481	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	12	---
Sodium	ppm	ASTM D5185m		<b>4</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>41</b>	84	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.0</b>	11.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.3</b>	23.5	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.8</b>	23.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.3</b>	7.5	---









# OIL ANALYSIS REPORT

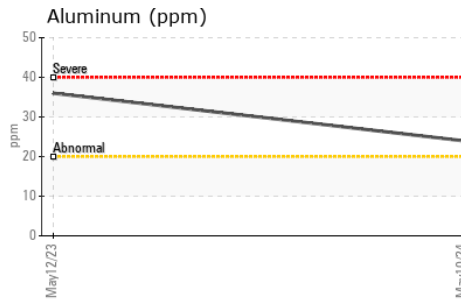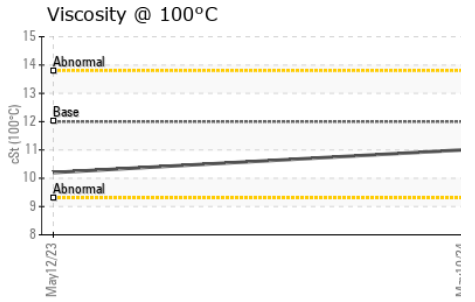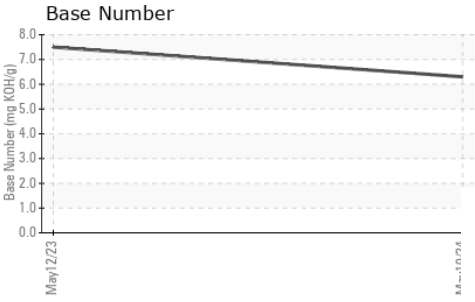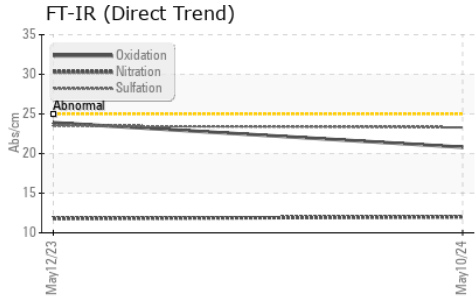

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.0	10.2

## GRAPHS

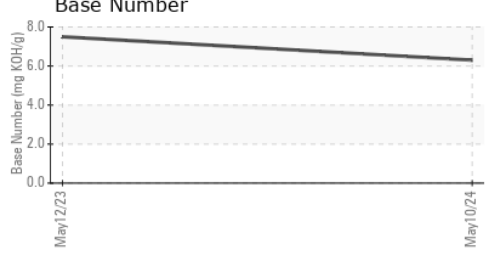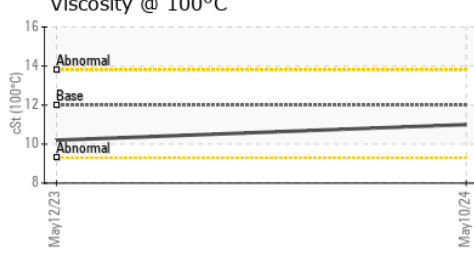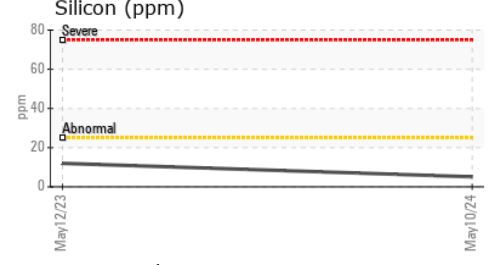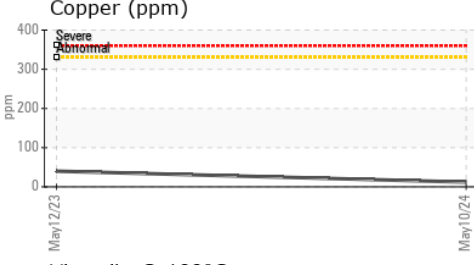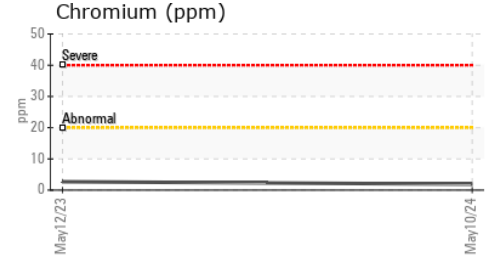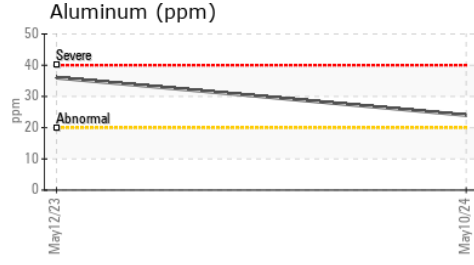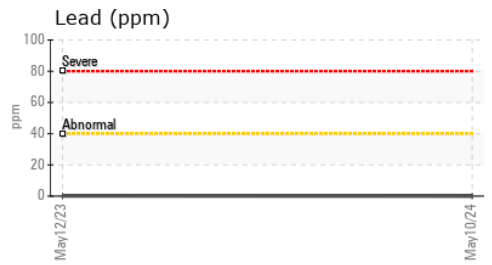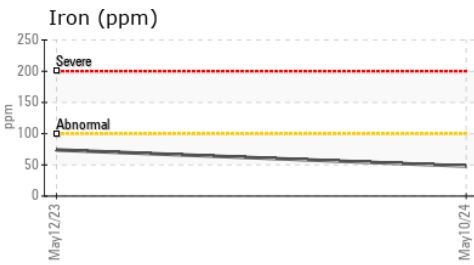

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121056      **Received** : 07 Jun 2024  
**Lab Number** : **06202447**      **Tested** : 11 Jun 2024  
**Unique Number** : 11069908      **Diagnosed** : 11 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #114**  
 63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)