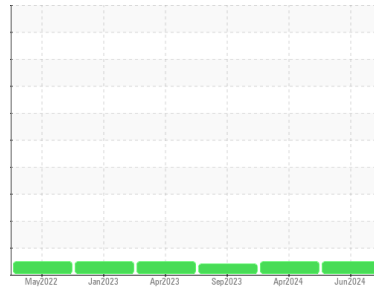


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Area  
**(89681X) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A69102**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0128243</b>	PCA0123374	PCA0106146
Sample Date	Client Info			<b>10 Jun 2024</b>	15 Apr 2024	07 Sep 2023
Machine Age	mls	Client Info		<b>727715</b>	697837	654427
Oil Age	mls	Client Info		<b>29878</b>	43410	59386
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>26</b>	71	38
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	3	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>10</b>	22	13
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>150	<b>7</b>	8	9
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>6</b>	11	11
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>67</b>	72	55
Manganese	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>1010</b>	951	836
Calcium	ppm	ASTM D5185m	1050	<b>1206</b>	1354	1135
Phosphorus	ppm	ASTM D5185m	995	<b>1127</b>	1177	948
Zinc	ppm	ASTM D5185m	1180	<b>1345</b>	1365	1212
Sulfur	ppm	ASTM D5185m	2600	<b>3399</b>	2954	3057

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	10	10
Sodium	ppm	ASTM D5185m		<b>4</b>	12	7
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	13	18

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.1</b>	2.3	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	15.8	18.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.3</b>	32.8	21.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.9</b>	30.9	27.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.9</b>	3.6	18.1





# OIL ANALYSIS REPORT

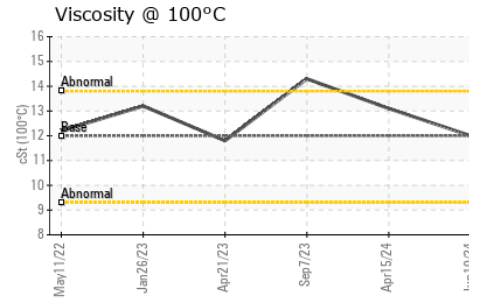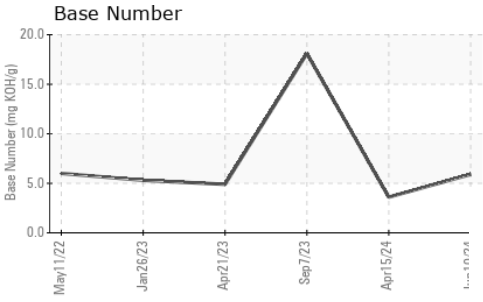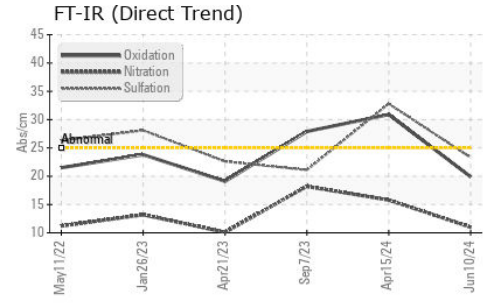

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.0	13.1

## GRAPHS

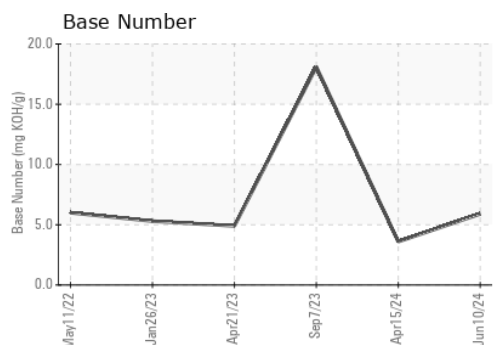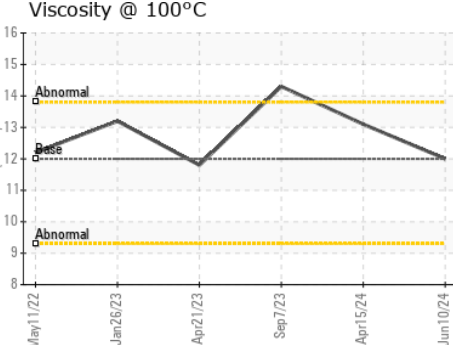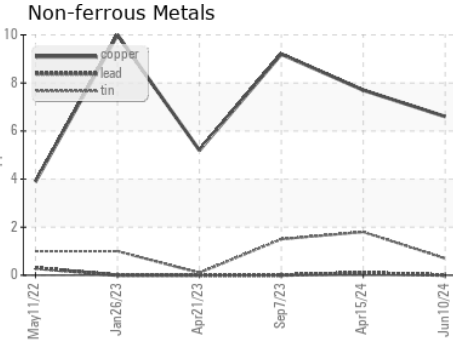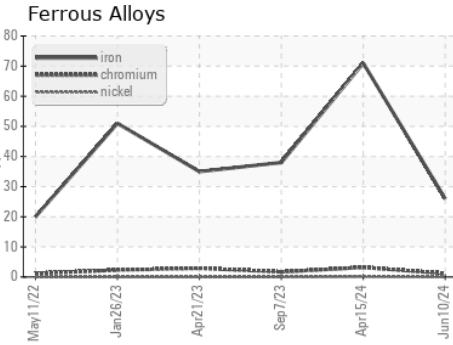

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0128243  
**Lab Number** : 06211360  
**Unique Number** : 11084224  
**Test Package** : FLEET  
**Received** : 17 Jun 2024  
**Tested** : 19 Jun 2024  
**Diagnosed** : 19 Jun 2024 - Wes Davis

**Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass**  
 101 Alliance Parkway  
 Williamston, SC  
 US 29697  
 Contact: Sonny Boucher  
 sboucher@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (864)226-2304

F: (864)226-2329