


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

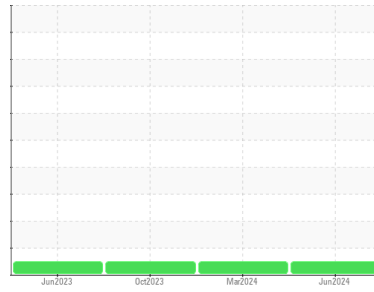

Area
(50953Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A63272
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0094027	PCA0093947	PCA0093863
Sample Date	Client Info		10 Jun 2024	08 Mar 2024	03 Oct 2023
Machine Age	mls	Client Info	196198	171688	108342
Oil Age	mls	Client Info	108342	171688	108342
Oil Changed	Client Info		Not Chngd	Not Chngd	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	36	24	17
Chromium	ppm	ASTM D5185m >5	4	4	2
Nickel	ppm	ASTM D5185m >2	<1	0	<1
Titanium	ppm	ASTM D5185m	2	3	<1
Silver	ppm	ASTM D5185m >3	<1	<1	<1
Aluminum	ppm	ASTM D5185m >30	18	17	11
Lead	ppm	ASTM D5185m >30	0	0	0
Copper	ppm	ASTM D5185m >150	30	29	99
Tin	ppm	ASTM D5185m >5	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	6	7	7
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	61	61	66
Manganese	ppm	ASTM D5185m 0	1	<1	<1
Magnesium	ppm	ASTM D5185m 950	938	928	883
Calcium	ppm	ASTM D5185m 1050	1183	1118	1178
Phosphorus	ppm	ASTM D5185m 995	1031	1005	913
Zinc	ppm	ASTM D5185m 1180	1272	1221	1192
Sulfur	ppm	ASTM D5185m 2600	2611	2751	2674

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	6	5	3
Sodium	ppm	ASTM D5185m	3	2	0
Potassium	ppm	ASTM D5185m >20	40	38	26




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.9	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	9.2	8.3	7.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.6	20.4	19.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.1	16.9	16.5
Base Number (BN)	mg KOH/g	ASTM D2896	6.1	7.1	7.8





OIL ANALYSIS REPORT

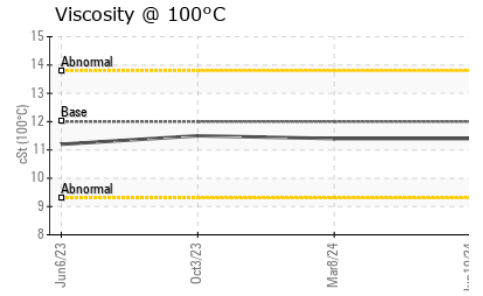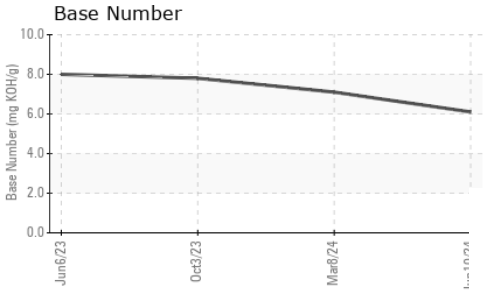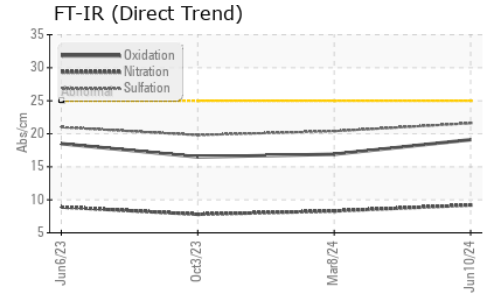

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.5

GRAPHS

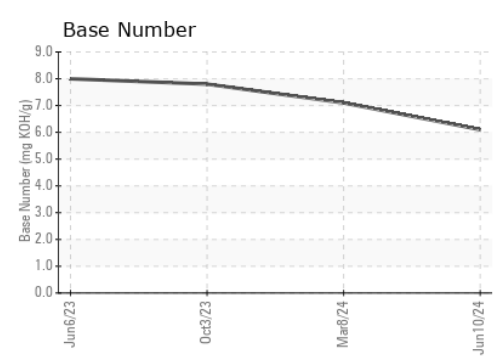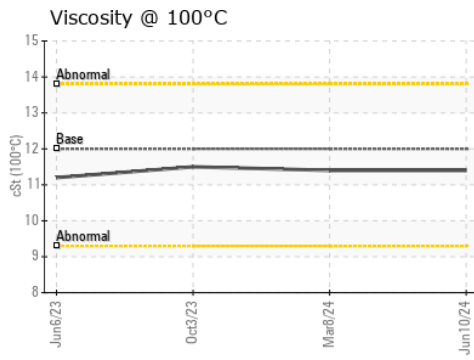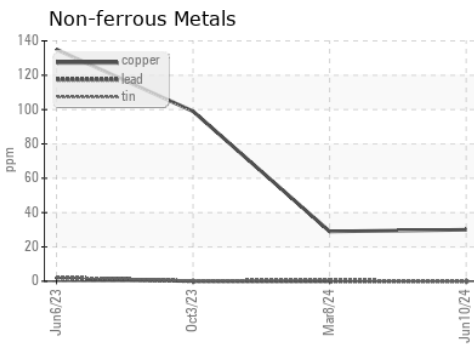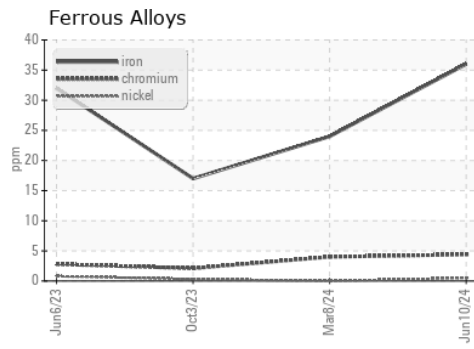

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0094027 **Received** : 17 Jun 2024
Lab Number : 06212828 **Tested** : 19 Jun 2024
Unique Number : 11085692 **Diagnosed** : 19 Jun 2024 - Wes Davis
Test Package : FLEET

Transervice - Shop 1372 - Berkeley-Moreno Valley
 17500 Perris Blvd.
 Moreno Valley, CA
 US 92551
 Contact: Ryan Cruz
 rcruz@transervice.com
 T: (951)924-7131
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)