

# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Machine Id  
**135608**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0121748</b>	PCA0121727	---
Sample Date	Client Info		<b>20 Jun 2024</b>	07 Jun 2024	---
Machine Age	mls	Client Info	<b>31875</b>	30071	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Not Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	SEVERE	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>29</b>	▲ 523	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	9	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	2	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	26	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>4</b>	82	---
Tin	ppm	ASTM D5185m >15	<b>0</b>	2	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>5</b>	16	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m 50	<b>59</b>	49	---
Manganese	ppm	ASTM D5185m 0	<b>1</b>	10	---
Magnesium	ppm	ASTM D5185m 950	<b>997</b>	790	---
Calcium	ppm	ASTM D5185m 1050	<b>1093</b>	1214	---
Phosphorus	ppm	ASTM D5185m 995	<b>1109</b>	737	---
Zinc	ppm	ASTM D5185m 1180	<b>1308</b>	884	---
Sulfur	ppm	ASTM D5185m 2600	<b>3851</b>	2259	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	27	---
Sodium	ppm	ASTM D5185m	<b>2</b>	10	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	33	---

### INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	▲ 4.5	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.7</b>	25.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	39.6	---

### FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.9</b>	43.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.1</b>	▲ 0.0	---

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

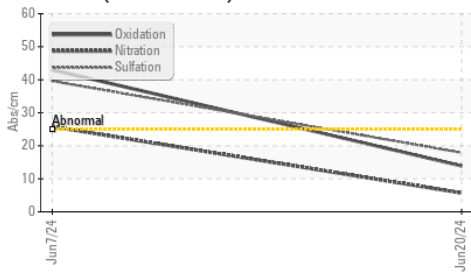

Base Number

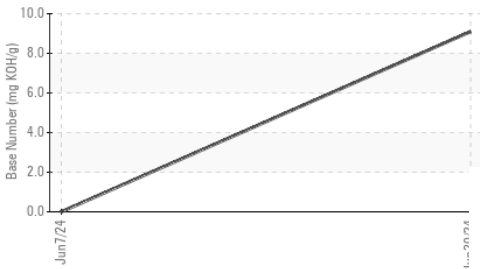









Viscosity @ 100°C

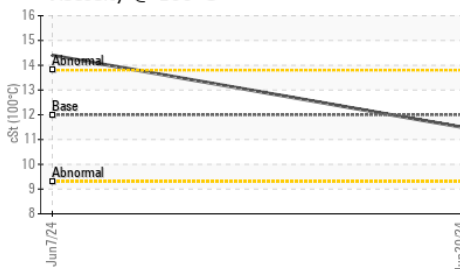

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	▲ 14.4

## GRAPHS

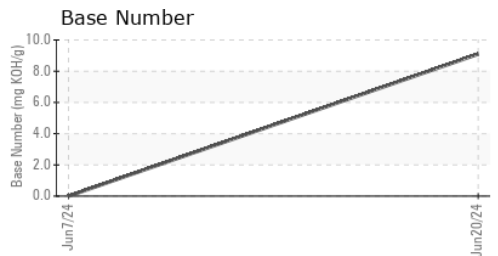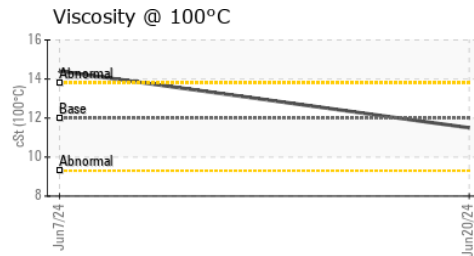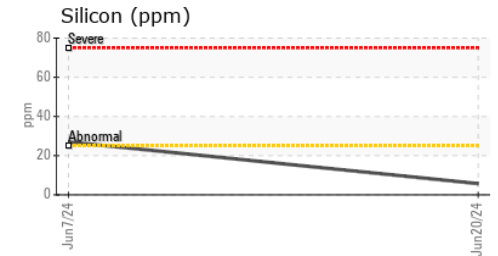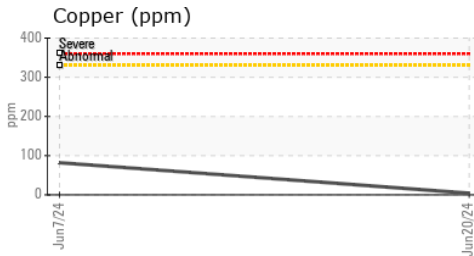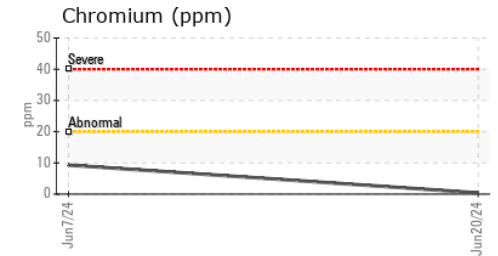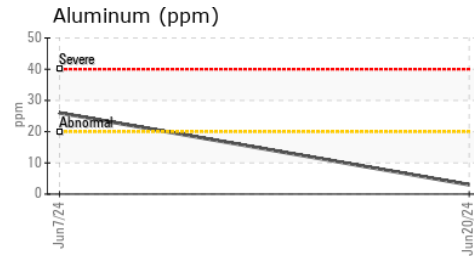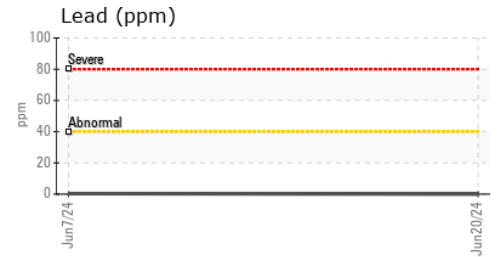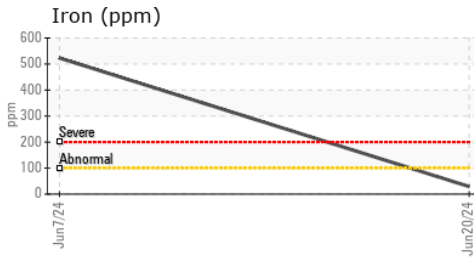

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121748      **Received** : 25 Jun 2024  
**Lab Number** : 06219373      **Tested** : 25 Jun 2024  
**Unique Number** : 11097570      **Diagnosed** : 25 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #112**  
 1504 MAINLINE DR  
 CINNAMINSON, NJ  
 US 08077  
 Contact: Rob Powell  
 rpowell@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (856)663-4898