


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

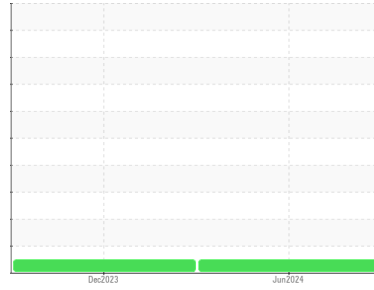

Machine Id  
**326749**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0124047</b>	PCA0110202	---
Sample Date	Client Info		<b>08 Jun 2024</b>	09 Dec 2023	---
Machine Age	mls	Client Info	<b>6442</b>	5485	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>53</b>	39	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>11</b>	9	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>10</b>	7	---
Tin	ppm	ASTM D5185m >15	<b>1</b>	1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>20</b>	18	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m 50	<b>60</b>	61	---
Manganese	ppm	ASTM D5185m 0	<b>2</b>	2	---
Magnesium	ppm	ASTM D5185m 950	<b>911</b>	848	---
Calcium	ppm	ASTM D5185m 1050	<b>1190</b>	1110	---
Phosphorus	ppm	ASTM D5185m 995	<b>1020</b>	1016	---
Zinc	ppm	ASTM D5185m 1180	<b>1223</b>	1160	---
Sulfur	ppm	ASTM D5185m 2600	<b>3571</b>	2918	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	5	---
Sodium	ppm	ASTM D5185m	<b>2</b>	1	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	2	---




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.6</b>	6.0	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.0</b>	17.8	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.1</b>	13.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.5</b>	9.4	---









# OIL ANALYSIS REPORT

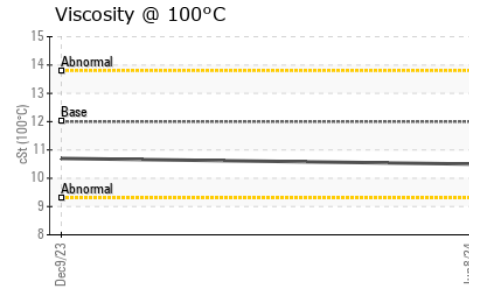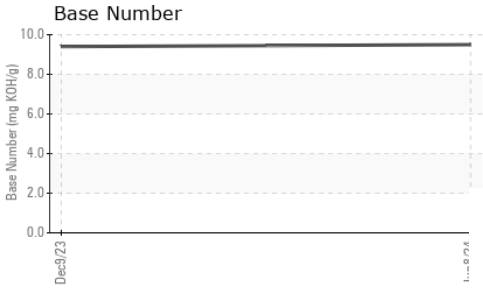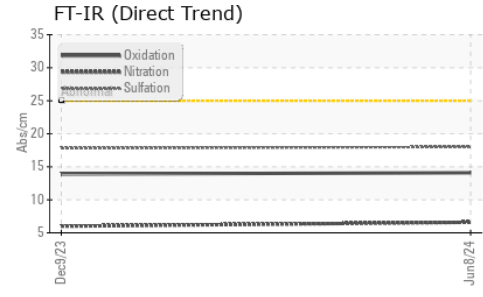

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.5	10.7

## GRAPHS

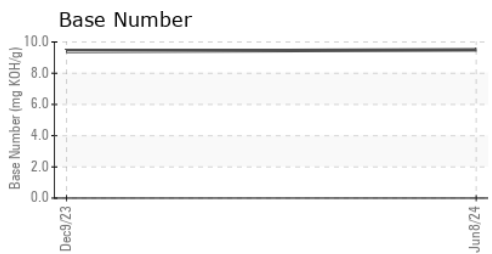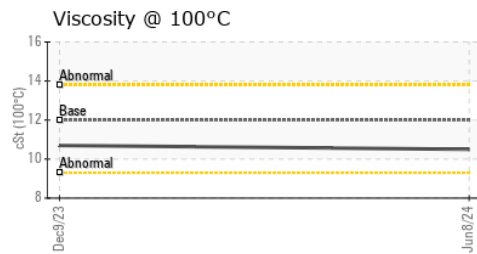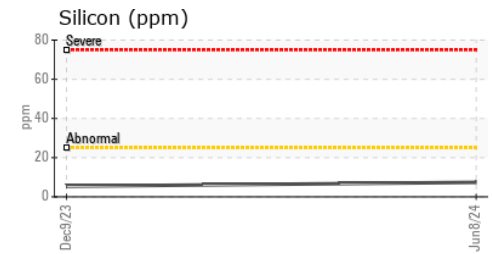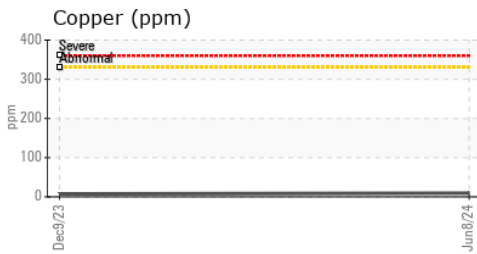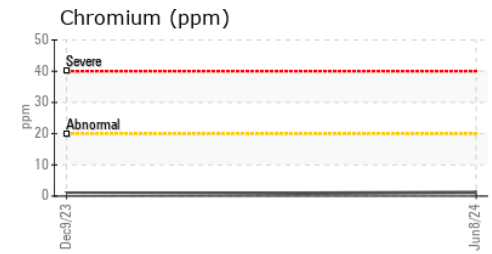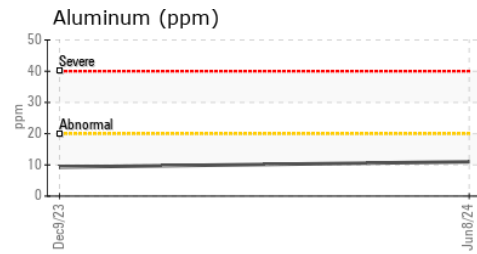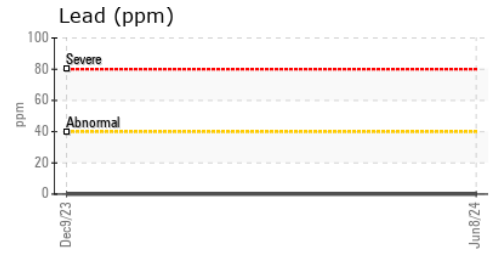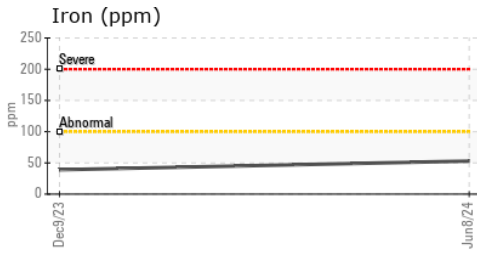

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0124047      **Received** : 26 Jun 2024  
**Lab Number** : 06220709      **Tested** : 27 Jun 2024  
**Unique Number** : 11098906      **Diagnosed** : 27 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #121**  
 107 HOW LANE  
 NEW BRUNSWICK, NJ  
 US 08901

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Anthony Cursi  
 acursi@millertransgroup.com  
 T: (732)358-4027  
 F: (732)400-8475