




# OIL ANALYSIS REPORT

Sample Rating Trend

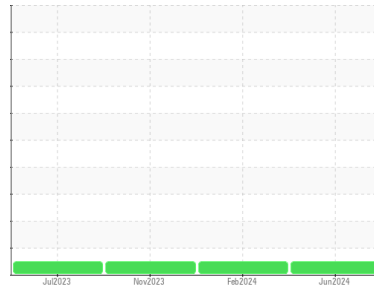

**NORMAL**



Machine Id  
**420056**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0119871</b>	GFL0097808	GFL0097815
Sample Date	Client Info		<b>24 Jun 2024</b>	26 Feb 2024	22 Nov 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>450</b>	580	600
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>19</b>	15	19
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>1</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	1	1
Copper	ppm	ASTM D5185m >330	<b>4</b>	5	4
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	3	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	57	82
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>992</b>	909	1351
Calcium	ppm	ASTM D5185m 1070	<b>1186</b>	995	1484
Phosphorus	ppm	ASTM D5185m 1150	<b>1104</b>	1018	1312
Zinc	ppm	ASTM D5185m 1270	<b>1382</b>	1242	1695
Sulfur	ppm	ASTM D5185m 2060	<b>3745</b>	2827	4626

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	7
Sodium	ppm	ASTM D5185m	<b>5</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>5</b>	2	6

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	9.4	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.8</b>	21.8	21.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.8</b>	19.5	18.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.4</b>	6.6	7.3







# OIL ANALYSIS REPORT

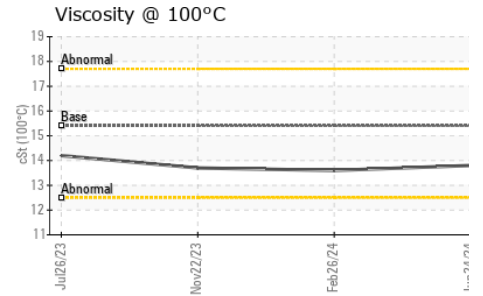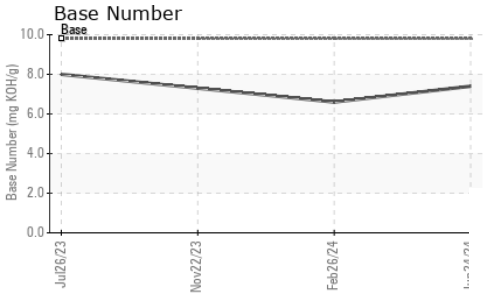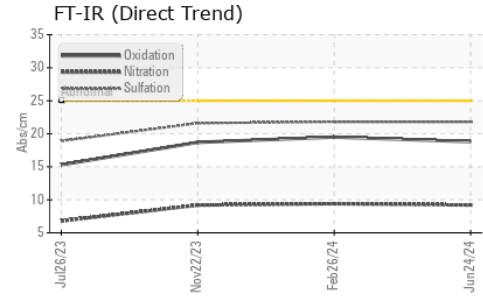

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.6

## GRAPHS

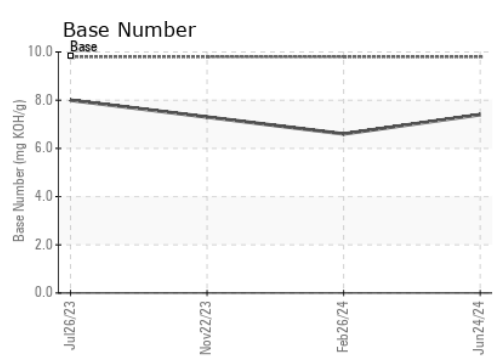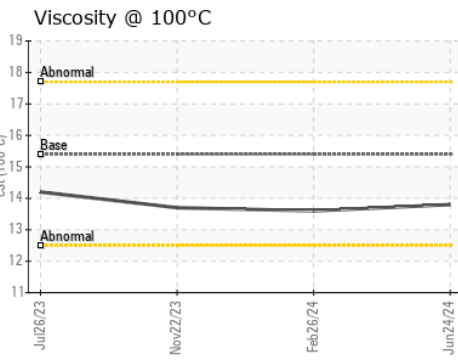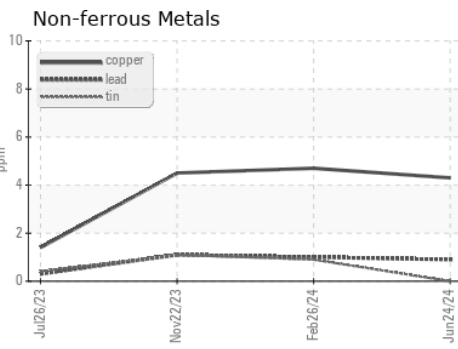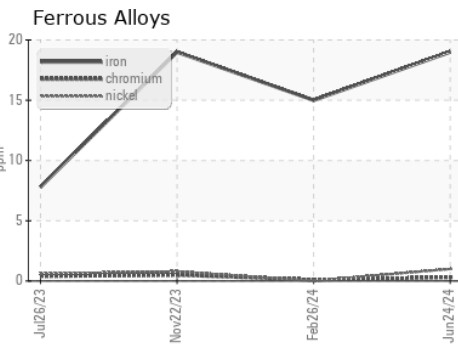

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119871  
**Lab Number** : 06223044  
**Unique Number** : 11101241  
**Test Package** : FLEET  
**Received** : 27 Jun 2024  
**Tested** : 28 Jun 2024  
**Diagnosed** : 28 Jun 2024 - Wes Davis

**GFL Environmental - 958 - Tri County HC Morton**  
 1090 W. Jefferson St.  
 Morton, IL  
 US 61550  
 Contact: Bryan Link  
 blink@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)