




OIL ANALYSIS REPORT

Sample Rating Trend

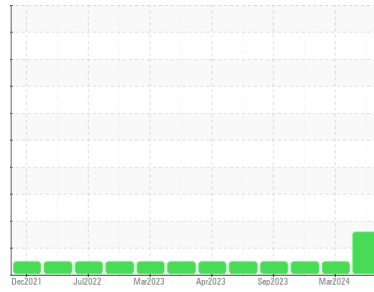

Machine Id
929100-62

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (12 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0125837	GFL0110548	GFL0081210
Sample Date	Client Info	25 Jun 2024	26 Mar 2024	23 Oct 2023
Machine Age	hrs	11332	11028	18258
Oil Age	hrs	1576	200	2500
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	11	30	20
Chromium	ppm ASTM D5185m >4	<1	2	1
Nickel	ppm ASTM D5185m >2	0	<1	<1
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >2	0	<1	0
Aluminum	ppm ASTM D5185m >25	2	6	3
Lead	ppm ASTM D5185m >45	2	5	4
Copper	ppm ASTM D5185m >85	2	4	8
Tin	ppm ASTM D5185m >4	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	<1	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	2	5
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	61	66	65
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	1079	1026	985
Calcium	ppm ASTM D5185m 1070	1208	1144	1077
Phosphorus	ppm ASTM D5185m 1150	1160	1068	1076
Zinc	ppm ASTM D5185m 1270	1416	1323	1315
Sulfur	ppm ASTM D5185m 2060	4064	2998	3457

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	▲ 41	9	7
Sodium	ppm ASTM D5185m	3	5	5
Potassium	ppm ASTM D5185m >20	2	24	6

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.6	0.6
Nitration	Abs/cm *ASTM D7624 >20	7.5	10.5	10.0
Sulfation	Abs/.1mm *ASTM D7415 >30	19.3	21.5	21.7

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.9	18.2	17.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.2	6.7	6.6







OIL ANALYSIS REPORT

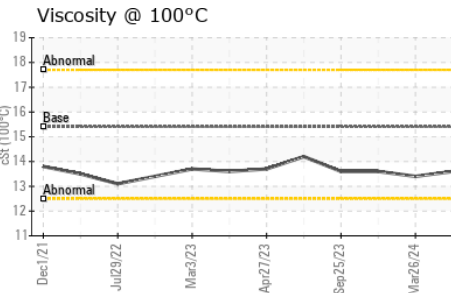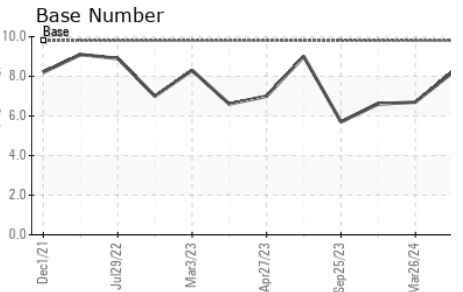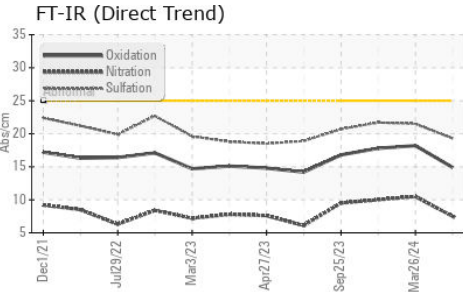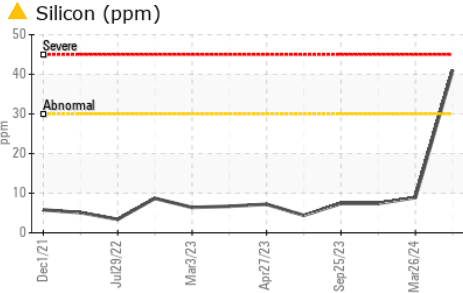

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.4

GRAPHS

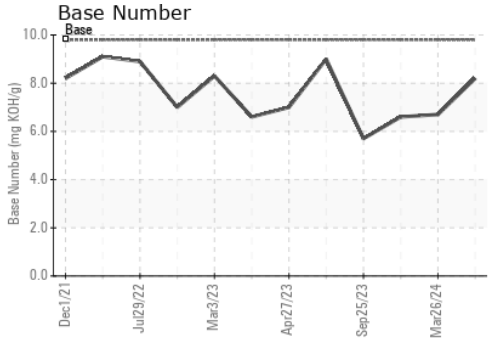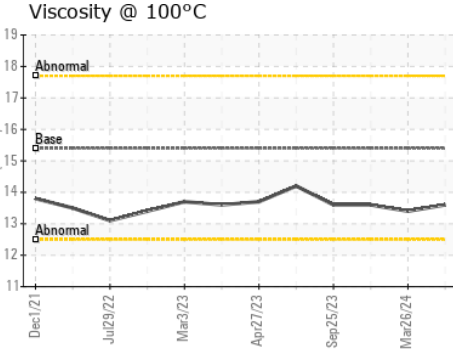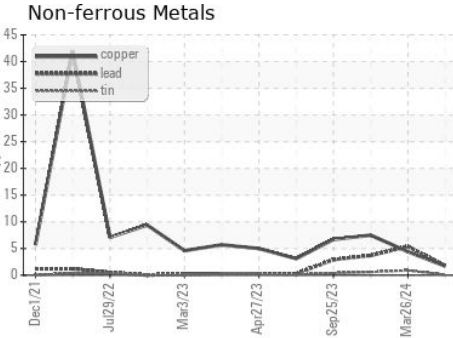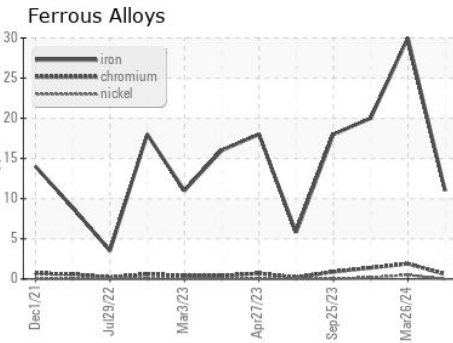

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0125837 **Received** : 01 Jul 2024
Lab Number : 06224341 **Tested** : 02 Jul 2024
Unique Number : 11102538 **Diagnosed** : 02 Jul 2024 - Jonathan Hester
Test Package : FLEET

GFL Environmental - 166 - Phenix City
 18 Old Brickyard Rd
 Phenix City, AL
 US 36869
 Contact: DEAN PEACE JR
 dean.peace@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)