


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

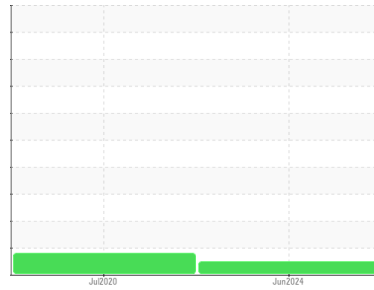

Machine Id  
**705599**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0121075</b>	PCA0027011	---
Sample Date	Client Info			<b>10 Jun 2024</b>	28 Jul 2020	---
Machine Age	mls	Client Info		<b>0</b>	10615	---
Oil Age	mls	Client Info		<b>0</b>	10615	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>40</b>	27	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	2	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	22	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>30</b>	658	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	10	---
Antimony	ppm	ASTM D5185m		<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>6</b>	58	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>68</b>	8	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m	950	<b>860</b>	646	---
Calcium	ppm	ASTM D5185m	1050	<b>1305</b>	1394	---
Phosphorus	ppm	ASTM D5185m	995	<b>978</b>	688	---
Zinc	ppm	ASTM D5185m	1180	<b>1227</b>	712	---
Sulfur	ppm	ASTM D5185m	2600	<b>2190</b>	3284	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	8	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>10</b>	57	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.9</b>	9.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.9</b>	19.5	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.3</b>	15.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.8</b>	---	---









# OIL ANALYSIS REPORT

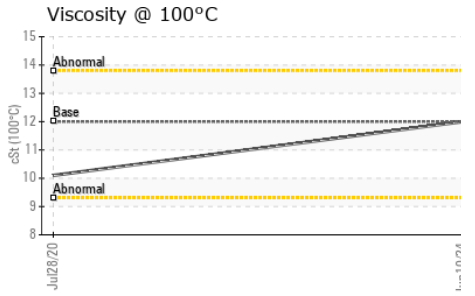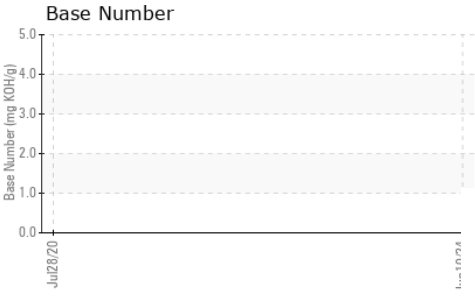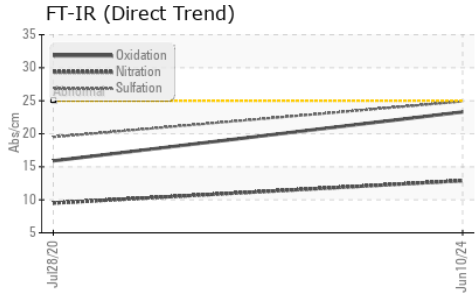

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.0	10.1

## GRAPHS

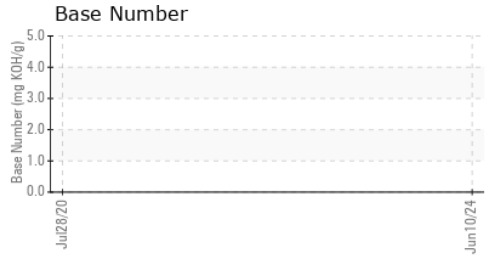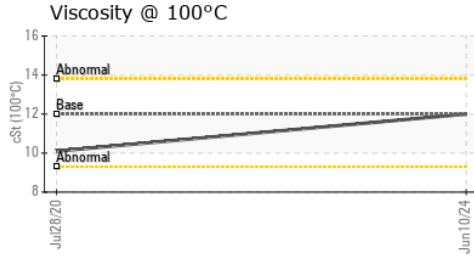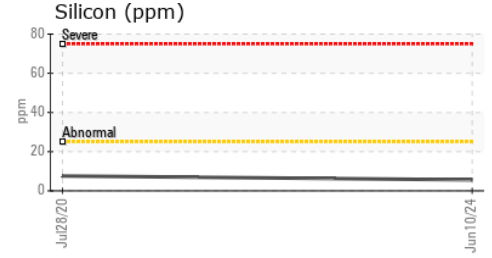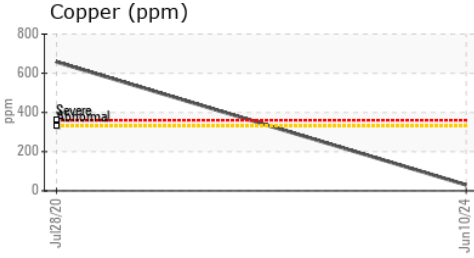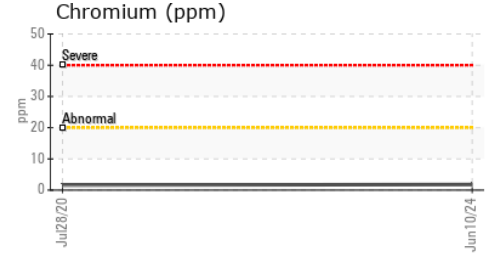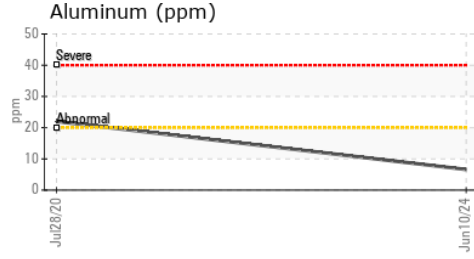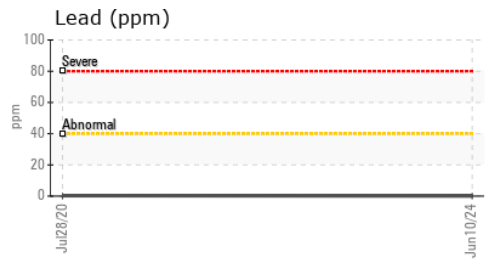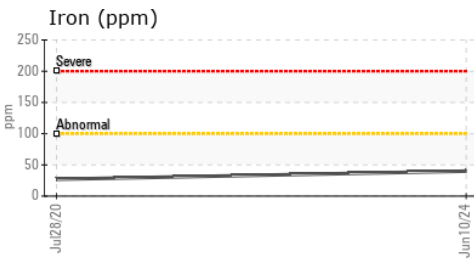

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121075      **Received** : 02 Jul 2024  
**Lab Number** : 06225966      **Tested** : 03 Jul 2024  
**Unique Number** : 11109459      **Diagnosed** : 03 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #114**  
 63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)