


OIL ANALYSIS REPORT



Area
KEMP QUARRIES / PRYOR [70967]
 Machine Id
OHT129
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

Sample Rating Trend

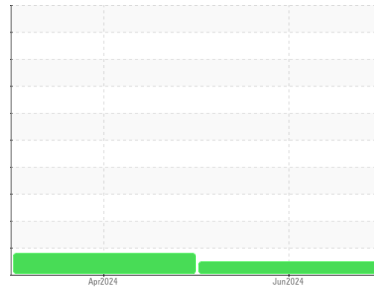

NORMAL

✓

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor. (Customer Sample Comment: Pm1 performed. All oil samples taken. Engine oil, engine oil filters, fuel filters, air filters, and cabin air filters changed.)

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0108890	PCA0086661	---
Sample Date	Client Info		22 Jun 2024	23 Apr 2024	---
Machine Age	hrs	Client Info	15416	15042	---
Oil Age	hrs	Client Info	374	0	---
Oil Changed	Client Info		Oil Added	Changed	---
Sample Status			NORMAL	MARGINAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >26	14	25	---
Chromium	ppm	ASTM D5185m >5	<1	0	---
Nickel	ppm	ASTM D5185m >10	<1	0	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m	<1	0	---
Aluminum	ppm	ASTM D5185m >11	2	3	---
Lead	ppm	ASTM D5185m >10	<1	<1	---
Copper	ppm	ASTM D5185m >31	6	8	---
Tin	ppm	ASTM D5185m >10	<1	<1	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	3	8	---
Barium	ppm	ASTM D5185m 0	0	<1	---
Molybdenum	ppm	ASTM D5185m 0	2	2	---
Manganese	ppm	ASTM D5185m 0	<1	<1	---
Magnesium	ppm	ASTM D5185m 0	18	35	---
Calcium	ppm	ASTM D5185m 50	1607	3034	---
Phosphorus	ppm	ASTM D5185m 330	534	826	---
Zinc	ppm	ASTM D5185m 430	759	1035	---
Sulfur	ppm	ASTM D5185m 760	2295	4226	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >21	10	17	---
Sodium	ppm	ASTM D5185m	0	2	---
Potassium	ppm	ASTM D5185m >20	2	2	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	▲ MODER	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---

OIL ANALYSIS REPORT








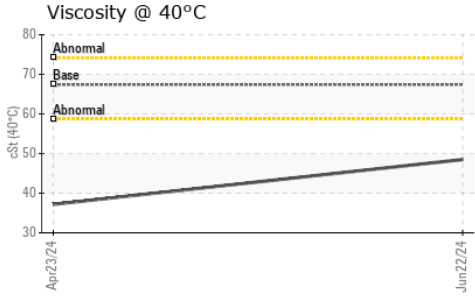


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67.4	48.5	37.2	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

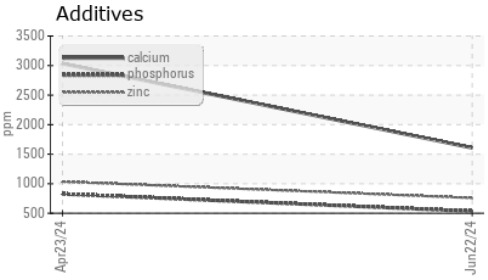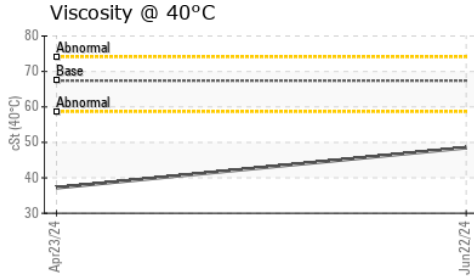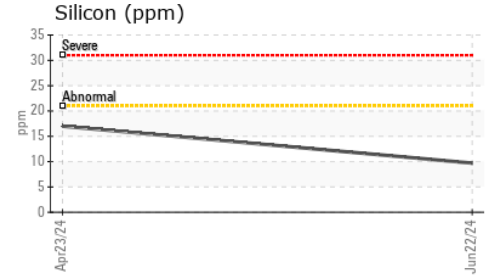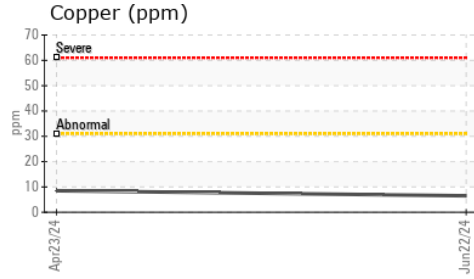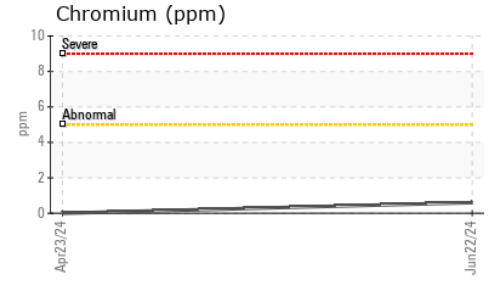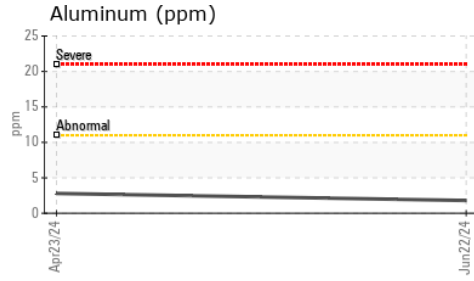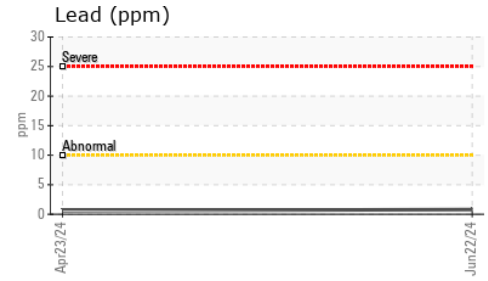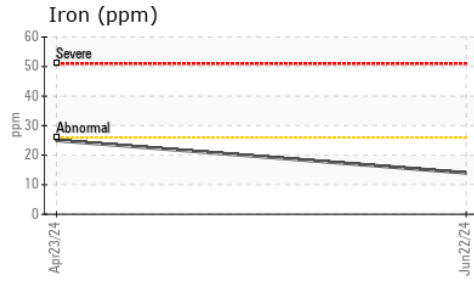

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108890
Lab Number : 06230688
Unique Number : 11114181
Test Package : MOB 1

Received : 08 Jul 2024
Tested : 09 Jul 2024
Diagnosed : 10 Jul 2024 - Jonathan Hester

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

pryor@pryorstone.com

T:

F: