


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

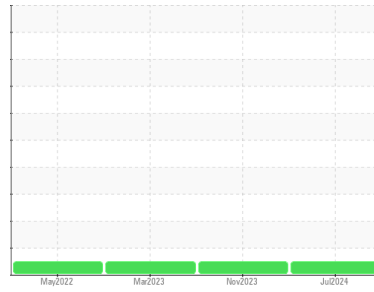

Area
(14256Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A61436
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0128171	PCA0111806	PCA0090857
Sample Date	Client Info			01 Jul 2024	01 Nov 2023	02 Mar 2023
Machine Age	mls	Client Info		335060	291130	249618
Oil Age	mls	Client Info		43930	41512	56114
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	34	39	42
Chromium	ppm	ASTM D5185m	>20	2	2	2
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	4	4	6
Lead	ppm	ASTM D5185m	>40	6	7	8
Copper	ppm	ASTM D5185m	>330	<1	<1	2
Tin	ppm	ASTM D5185m	>15	0	1	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	4	13	3
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	63	51	62
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	950	892	782	883
Calcium	ppm	ASTM D5185m	1050	1302	1419	1095
Phosphorus	ppm	ASTM D5185m	995	1044	1045	961
Zinc	ppm	ASTM D5185m	1180	1251	1329	1209
Sulfur	ppm	ASTM D5185m	2600	3198	3092	3025

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	7	8
Sodium	ppm	ASTM D5185m		4	4	<1
Potassium	ppm	ASTM D5185m	>20	4	5	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	11.2	11.0	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	24.5	25.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.4	20.5	22.2
Base Number (BN)	mg KOH/g	ASTM D2896		4.7	5.2	4.8





OIL ANALYSIS REPORT

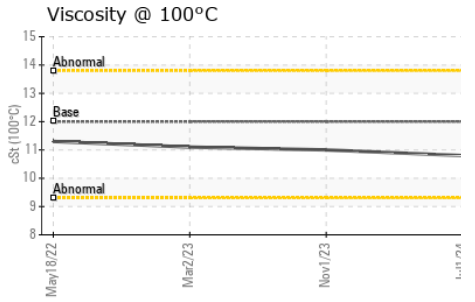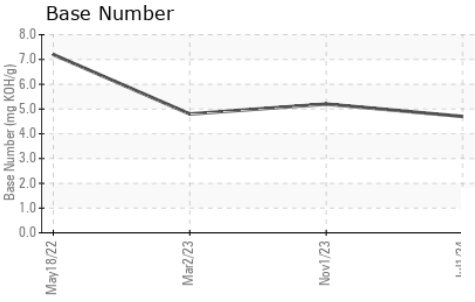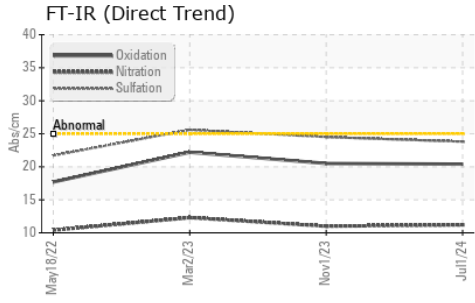

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	11.0

GRAPHS

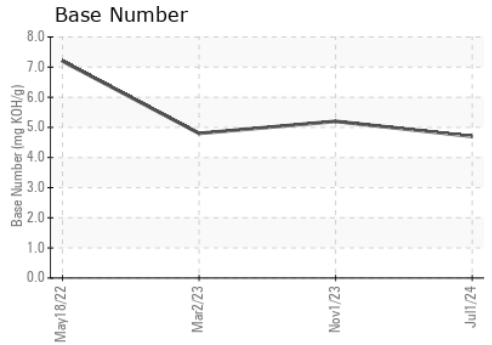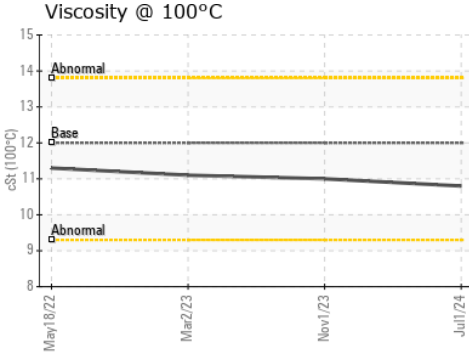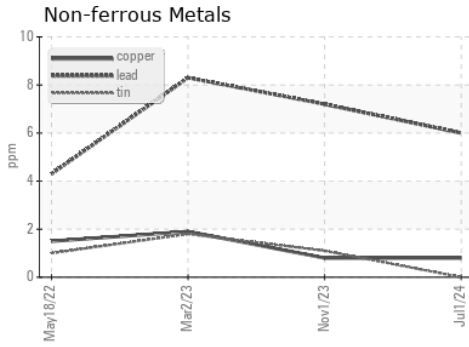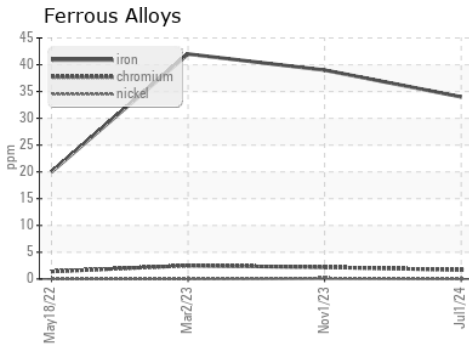

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0128171
Lab Number : 06230981
Unique Number : 11114474
Test Package : FLEET

Received : 08 Jul 2024
Tested : 10 Jul 2024
Diagnosed : 10 Jul 2024 - Wes Davis

Transervice - Shop 1373 - Berkeley-Anderson/Pendergrass
 101 Alliance Parkway
 Williamston, SC
 US 29697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Sonny Boucher
 sboucher@transervice.com

T: (864)226-2304

F: (864)226-2329