




OIL ANALYSIS REPORT

Sample Rating Trend

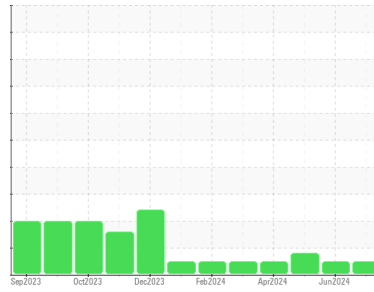

NORMAL



Machine Id
414047
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0121564	GFL0121612	GFL0105303
Sample Date	Client Info		08 Jul 2024	11 Jun 2024	31 May 2024
Machine Age	hrs	Client Info	1423	1369	1229
Oil Age	hrs	Client Info	600	150	600
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	5	4	13
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	<1	2
Titanium	ppm	ASTM D5185m >2	0	<1	<1
Silver	ppm	ASTM D5185m >2	<1	<1	<1
Aluminum	ppm	ASTM D5185m >20	4	3	6
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >330	30	33	194
Tin	ppm	ASTM D5185m >15	<1	<1	1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	7	<1	1
Barium	ppm	ASTM D5185m 10	0	1	0
Molybdenum	ppm	ASTM D5185m 100	63	60	59
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	986	943	892
Calcium	ppm	ASTM D5185m 3000	1191	1077	1040
Phosphorus	ppm	ASTM D5185m 1150	1181	1102	851
Zinc	ppm	ASTM D5185m 1350	1389	1261	1153
Sulfur	ppm	ASTM D5185m 4250	4064	3279	2739

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	5	9
Sodium	ppm	ASTM D5185m >25	3	1	<1
Potassium	ppm	ASTM D5185m >20	10	10	16

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.1	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	6.4	6.2	8.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	19.1	20.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.0	14.8	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	9.1	9.6	7.4







OIL ANALYSIS REPORT

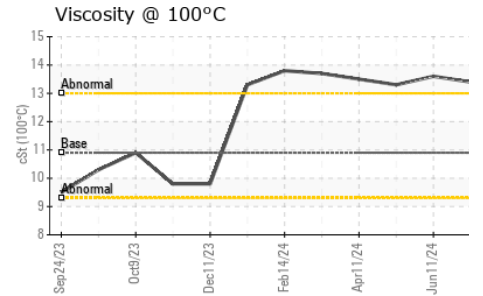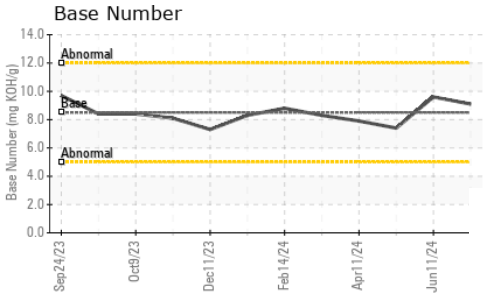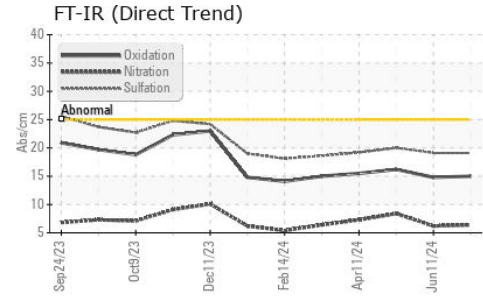

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	13.4	13.6	13.3

GRAPHS

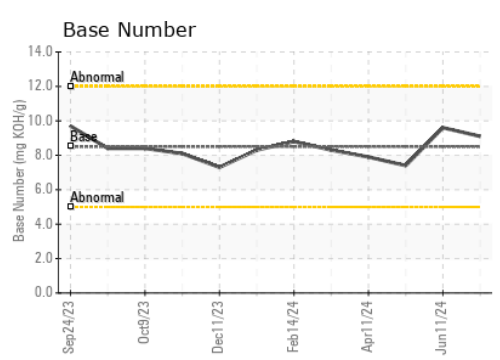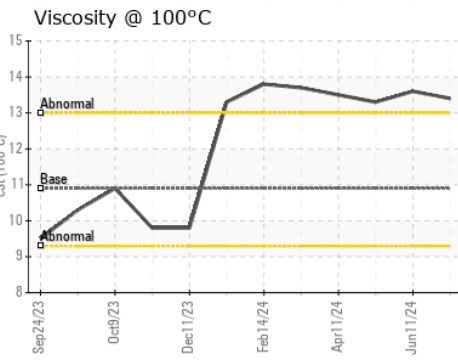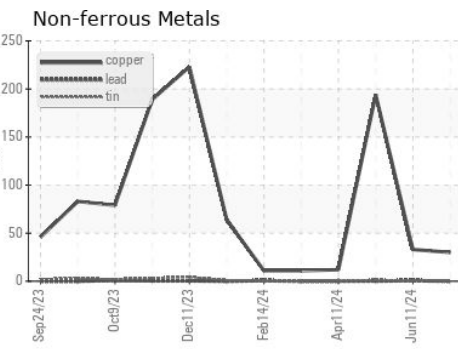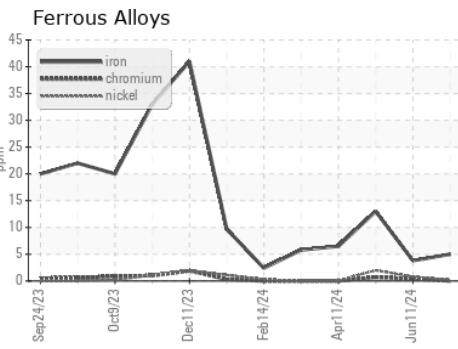

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0121564 **Received** : 10 Jul 2024
Lab Number : 06231989 **Tested** : 10 Jul 2024
Unique Number : 11115482 **Diagnosed** : 11 Jul 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 821 - Ozarks Hauling
 33924 Olath Drive
 Lebanon, MO 65536
 Contact: Landen Johnson
 landen.johnson@gflenv.com
 T: (417)664-0010
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)