

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Area  
**(TEMP) Supreme Leasing-Tractor**  
 Machine Id  
**[Supreme Leasing-Tractor] 149A149351**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 Metal levels are typical for a components first oil change.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0128845</b>	---	---
Sample Date	Client Info		<b>06 Jul 2024</b>	---	---
Machine Age	mls Client Info		<b>1730</b>	---	---
Oil Age	mls Client Info		<b>1730</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>80	<b>11</b>	---	---
Chromium	ppm ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m	>2	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m	>3	<b>&lt;1</b>	---	---
Aluminum	ppm ASTM D5185m	>30	<b>4</b>	---	---
Lead	ppm ASTM D5185m	>30	<b>1</b>	---	---
Copper	ppm ASTM D5185m	>150	<b>7</b>	---	---
Tin	ppm ASTM D5185m	>5	<b>1</b>	---	---
Vanadium	ppm ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m		<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	2	<b>12</b>	---	---
Barium	ppm ASTM D5185m	0	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m	50	<b>58</b>	---	---
Manganese	ppm ASTM D5185m	0	<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m	950	<b>862</b>	---	---
Calcium	ppm ASTM D5185m	1050	<b>1058</b>	---	---
Phosphorus	ppm ASTM D5185m	995	<b>914</b>	---	---
Zinc	ppm ASTM D5185m	1180	<b>1127</b>	---	---
Sulfur	ppm ASTM D5185m	2600	<b>2865</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>20	<b>10</b>	---	---
Sodium	ppm ASTM D5185m		<b>1</b>	---	---
Potassium	ppm ASTM D5185m	>20	<b>4</b>	---	---




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	<b>0.2</b>	---	---
Nitration	Abs/cm *ASTM D7624	>20	<b>7.5</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415	>30	<b>19.2</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>16.7</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896		<b>8.5</b>	---	---





# OIL ANALYSIS REPORT

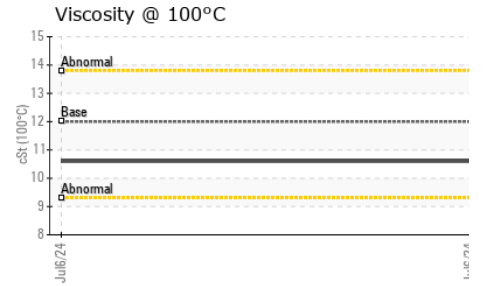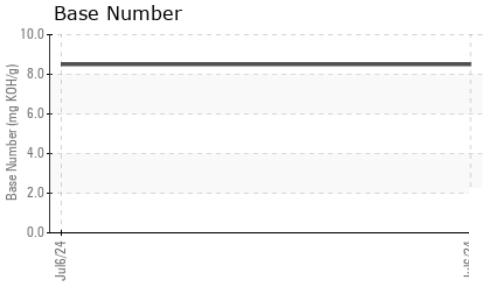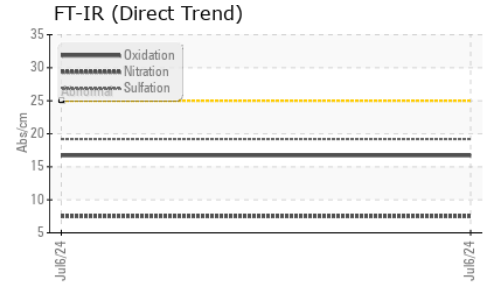

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.6</b>	---

## GRAPHS

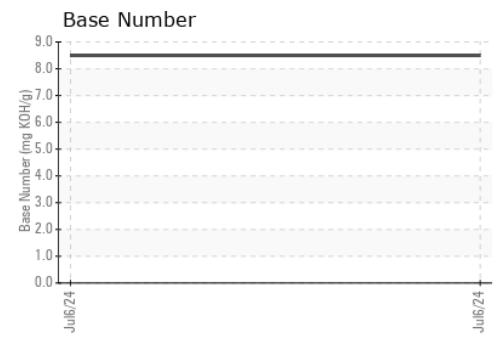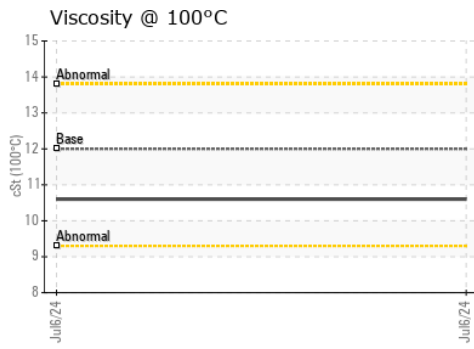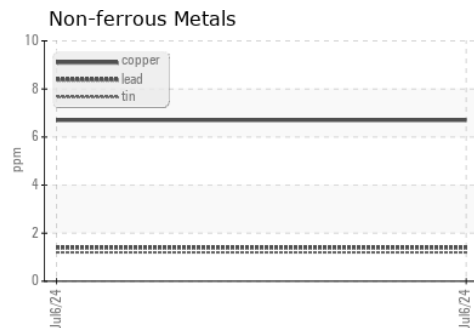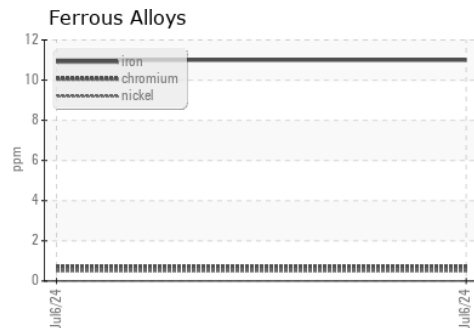

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0128845      **Received** : 10 Jul 2024  
**Lab Number** : **06232152**      **Tested** : 11 Jul 2024  
**Unique Number** : 11115645      **Diagnosed** : 11 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1490 - Supreme Leasing**  
 11601 W. Touhy Avenue, Bldg. 895  
 Chicago, IL  
 US 60666

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Nick Liberto  
 nliberto@transervice.com  
 T: (773)686-8013  
 F: