


OIL ANALYSIS REPORT

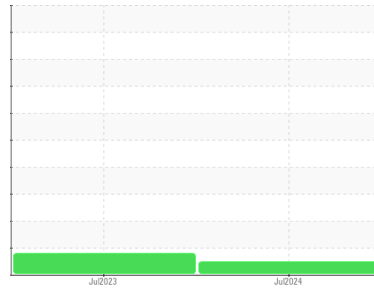

Area
(AY305K) Feldman Lumber-Tractor
 Machine Id
[Feldman Lumber-Tractor] 196D267
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

Sample Rating Trend

NORMAL

DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0106072	PCA0098300	---
Sample Date	Client Info		01 Jul 2024	18 Jul 2023	---
Machine Age	mls	Client Info	14767	3770	---
Oil Age	mls	Client Info	10997	3770	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	30	40	---
Chromium	ppm	ASTM D5185m >5	<1	<1	---
Nickel	ppm	ASTM D5185m >2	0	1	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m >3	<1	1	---
Aluminum	ppm	ASTM D5185m >30	6	5	---
Lead	ppm	ASTM D5185m >30	0	<1	---
Copper	ppm	ASTM D5185m >150	379	▲ 288	---
Tin	ppm	ASTM D5185m >5	3	6	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	11	55	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 50	65	40	---
Manganese	ppm	ASTM D5185m 0	2	5	---
Magnesium	ppm	ASTM D5185m 950	815	516	---
Calcium	ppm	ASTM D5185m 1050	1235	1689	---
Phosphorus	ppm	ASTM D5185m 995	979	754	---
Zinc	ppm	ASTM D5185m 1180	1146	916	---
Sulfur	ppm	ASTM D5185m 2600	2511	2829	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	5	6	---
Sodium	ppm	ASTM D5185m	4	6	---
Potassium	ppm	ASTM D5185m >20	9	7	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	8.6	7.1	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.2	22.7	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.2	21.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	9.5	---







OIL ANALYSIS REPORT

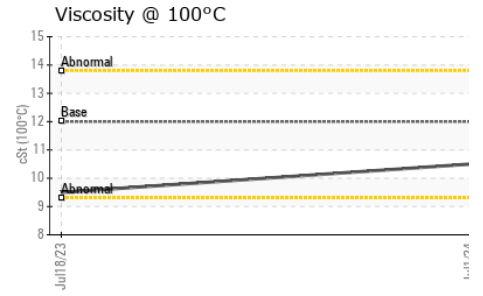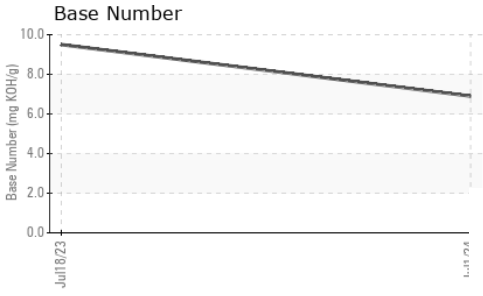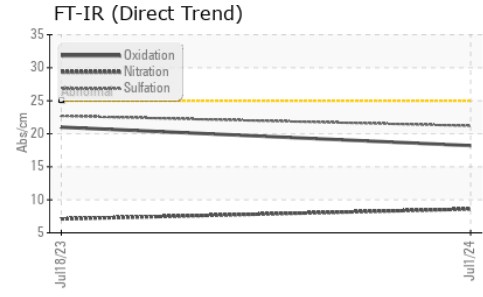

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.5	9.5

GRAPHS

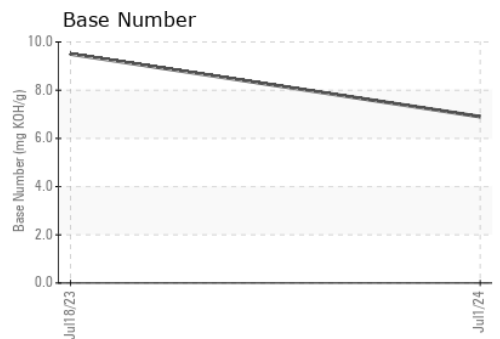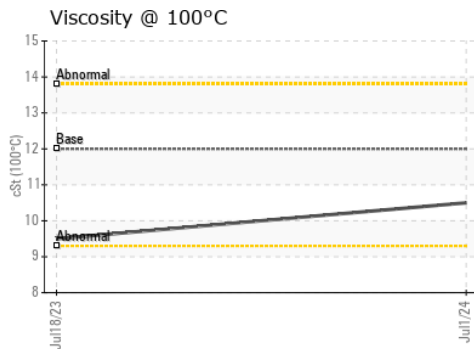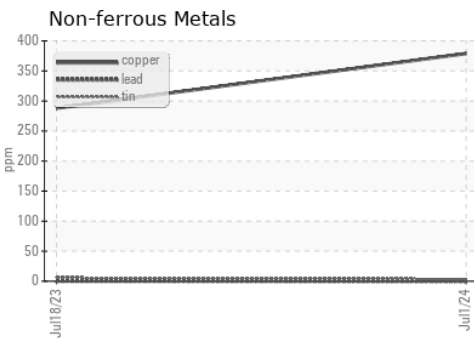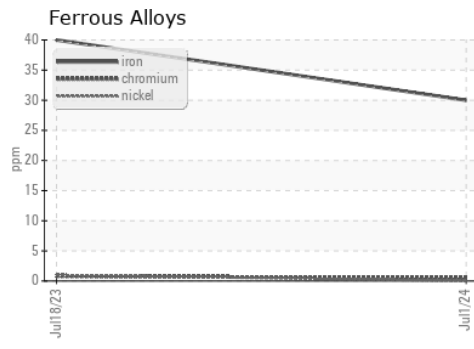

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106072
Lab Number : 06235374
Unique Number : 11124208
Test Package : FLEET

Received : 15 Jul 2024
Tested : 15 Jul 2024
Diagnosed : 15 Jul 2024 - Wes Davis

Transervice - Shop 1960 - Feldman Lumber Service
 1281 Metropolitan Avenue
 Brooklyn, NY
 US 11237
 Contact: Marc Fried
 mfried@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: