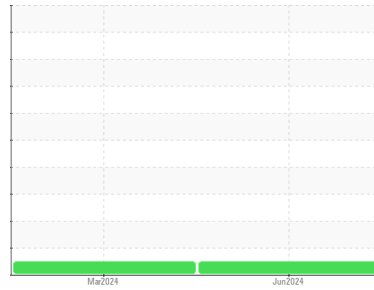


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Area  
**(65355Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A624156**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

Metal levels are typical for a new component breaking in.

**Contamination**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0127124</b>	PCA0119377	---
Sample Date	Client Info			<b>13 Jun 2024</b>	11 Mar 2024	---
Machine Age	mls	Client Info		<b>67050</b>	42872	---
Oil Age	mls	Client Info		<b>24178</b>	42872	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>35</b>	84	---
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	6	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	2	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>30	<b>44</b>	141	---
Lead	ppm	ASTM D5185m	>30	<b>3</b>	<1	---
Copper	ppm	ASTM D5185m	>150	<b>410</b>	188	---
Tin	ppm	ASTM D5185m	>5	<b>2</b>	9	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>8</b>	33	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>58</b>	39	---
Manganese	ppm	ASTM D5185m	0	<b>1</b>	5	---
Magnesium	ppm	ASTM D5185m	950	<b>1022</b>	583	---
Calcium	ppm	ASTM D5185m	1050	<b>1294</b>	1660	---
Phosphorus	ppm	ASTM D5185m	995	<b>1025</b>	777	---
Zinc	ppm	ASTM D5185m	1180	<b>1277</b>	904	---
Sulfur	ppm	ASTM D5185m	2600	<b>3209</b>	2171	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	12	---
Sodium	ppm	ASTM D5185m		<b>2</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>95</b>	346	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.2</b>	23.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.8</b>	24.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.7</b>	6.6	---





# OIL ANALYSIS REPORT

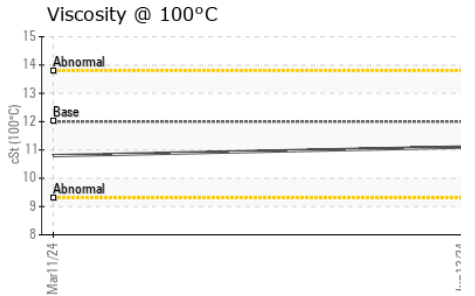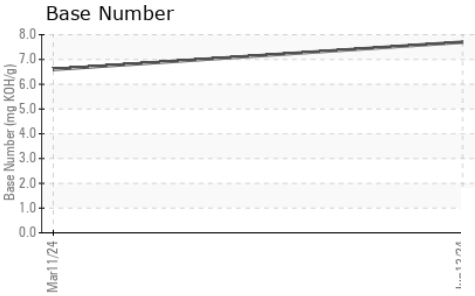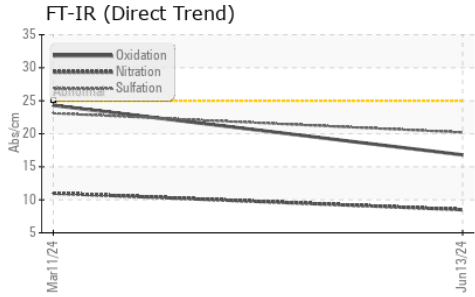

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.1	10.8

## GRAPHS

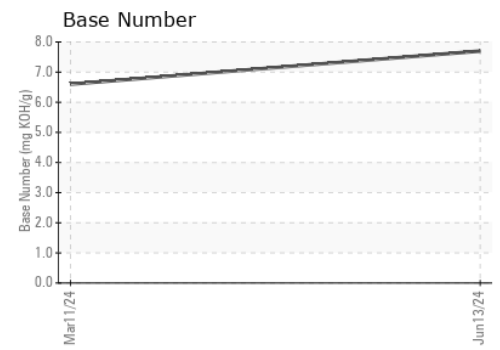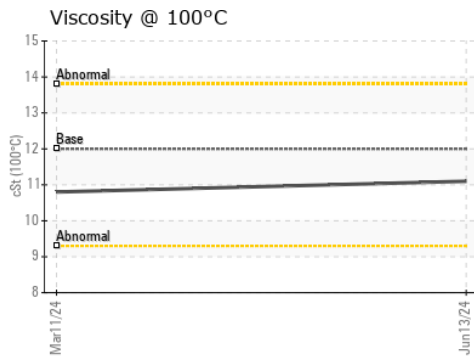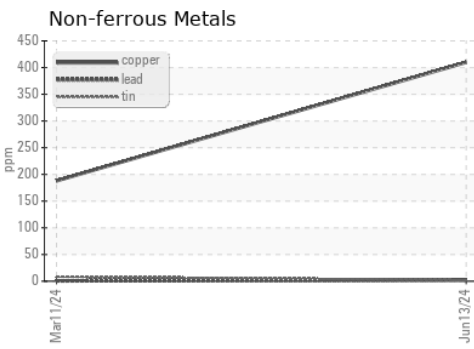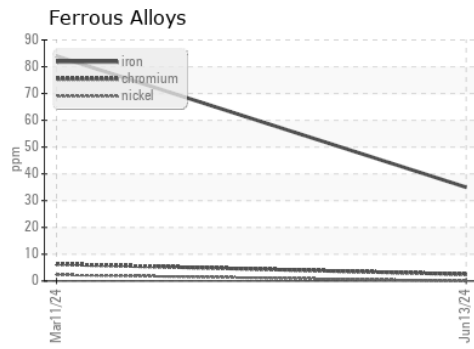

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0127124      **Received** : 15 Jul 2024  
**Lab Number** : 06235418      **Tested** : 15 Jul 2024  
**Unique Number** : 11124252      **Diagnosed** : 15 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1370 - Berkeley-Perrysburg**  
 28727 Oregon Road  
 Perrysburg, OH  
 US 43551  
 Contact: Curtis Hart  
 chart@transervice.com  
 T: (419)666-3277  
 F: (419)666-3279

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)