


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

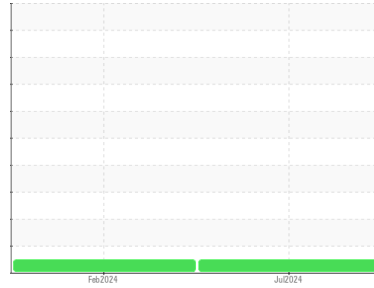

Machine Id  
**BM-220**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (10 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0130582</b>	PCA0110722	---
Sample Date	Client Info			<b>11 Jul 2024</b>	29 Feb 2024	---
Machine Age	mls	Client Info		<b>32440</b>	15870	---
Oil Age	mls	Client Info		<b>16570</b>	15870	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>46</b>	54	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>22</b>	16	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>6</b>	8	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>3</b>	27	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	3	---
Molybdenum	ppm	ASTM D5185m	50	<b>60</b>	8	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>976</b>	820	---
Calcium	ppm	ASTM D5185m	1050	<b>1208</b>	1251	---
Phosphorus	ppm	ASTM D5185m	995	<b>986</b>	782	---
Zinc	ppm	ASTM D5185m	1180	<b>1290</b>	902	---
Sulfur	ppm	ASTM D5185m	2600	<b>2880</b>	2675	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>11</b>	16	---
Sodium	ppm	ASTM D5185m		<b>0</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>65</b>	47	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.6</b>	10.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	22.8	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.1</b>	17.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.9</b>	5.6	---







# OIL ANALYSIS REPORT

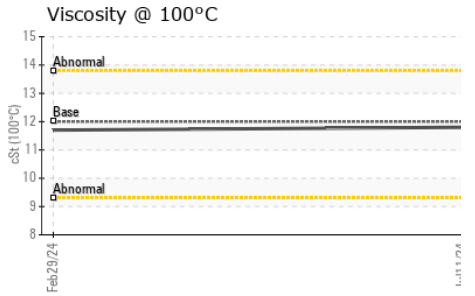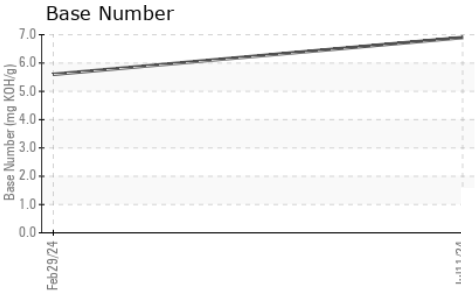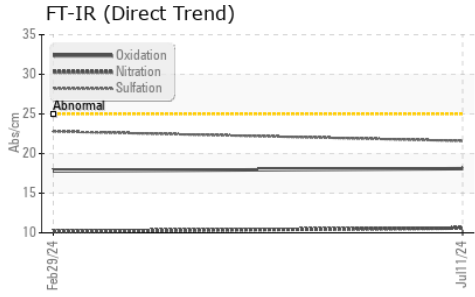

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.8	11.7

## GRAPHS

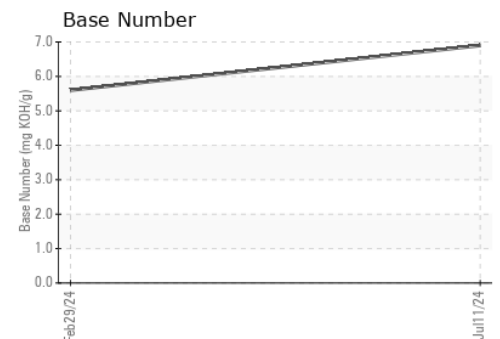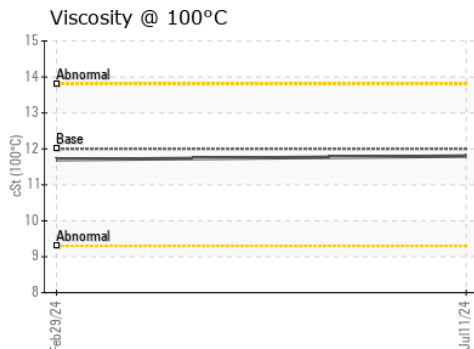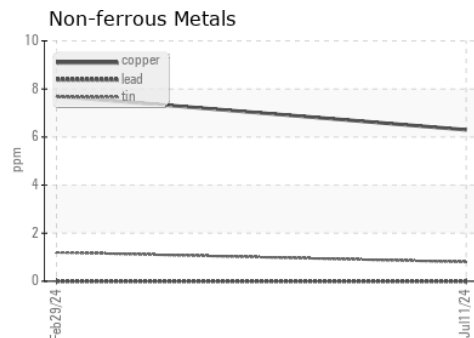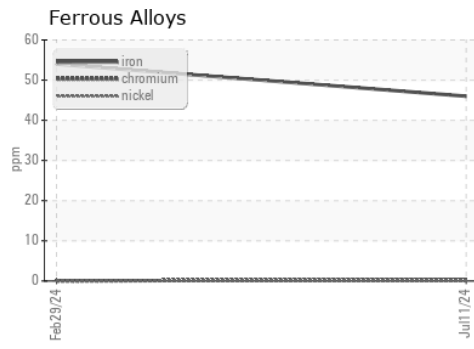

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0130582      **Received** : 15 Jul 2024  
**Lab Number** : 06235569      **Tested** : 16 Jul 2024  
**Unique Number** : 11124403      **Diagnosed** : 16 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**BLUE MAX TRUCKING**  
 1015 E. WESTINGHOUSE BLVD.  
 CHARLOTTE, NC  
 US 28273  
 Contact: Jody Greer  
 jgreer@bluemaxtrucking.com  
 T: (980)225-9968  
 F: (704)588-2901

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)