




OIL ANALYSIS REPORT

Sample Rating Trend

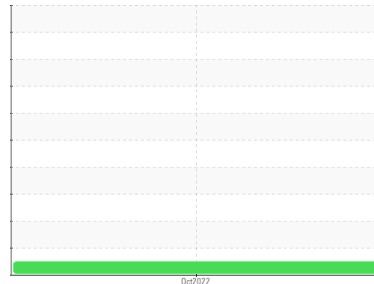

NORMAL



Area

huile neuve

Machine Id

Mobil DTE 10 Excel 32

Component

New (Unused) Oil

Fluid

MOBIL DTE 10 EXCEL 32 (--- GAL)

DIAGNOSIS

Recommendation

Il s'agit du relevé de base de cette huile neuve (inutilisée). Le fluide peut servir.

Contamination

La propreté du système est acceptable pour votre objectif de propreté ISO 4406. Il n'y a aucun indice de contamination dans le huile (inutilisée) neuve.

Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en l'utilisation.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0730738	---	---
Sample Date	Client Info		25 Oct 2022	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >5	0	---	---
Chromium	ppm	ASTM D5185(m) >5	0	---	---
Nickel	ppm	ASTM D5185(m) >5	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >5	0	---	---
Aluminum	ppm	ASTM D5185(m) >5	0	---	---
Lead	ppm	ASTM D5185(m) >5	1	---	---
Copper	ppm	ASTM D5185(m) >5	0	---	---
Tin	ppm	ASTM D5185(m) >5	0	---	---
Antimony	ppm	ASTM D5185(m)	<1	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<1	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	1	---	---
Calcium	ppm	ASTM D5185(m) 120	96	---	---
Phosphorus	ppm	ASTM D5185(m) 475	145	---	---
Zinc	ppm	ASTM D5185(m)	10	---	---
Sulfur	ppm	ASTM D5185(m) 1275	502	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<1	---	---
Sodium	ppm	ASTM D5185(m)	<1	---	---
Potassium	ppm	ASTM D5185(m) >20	<1	---	---


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624*	2.2	---	---
Sulfation	Abs./1mm	ASTM D7415*	22.8	---	---




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

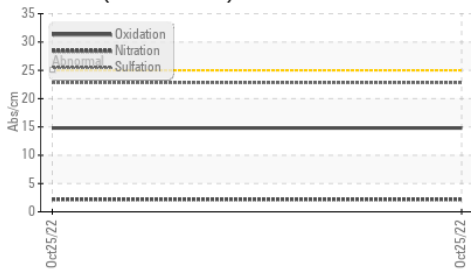

Particle Count

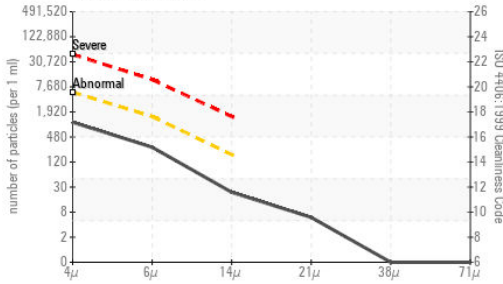


Acid Number

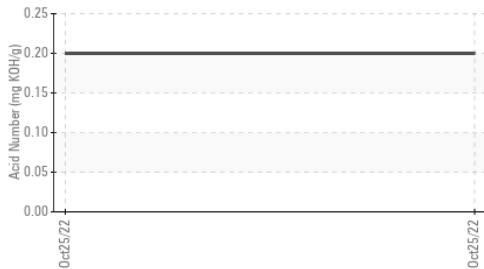

Viscosity @ 100°C



Viscosity @ 40°C

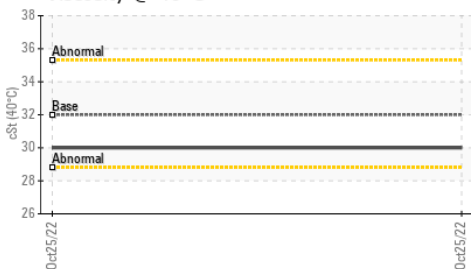

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	950	---	---
Particles >6µm	ASTM D7647	>1300	240	---	---
Particles >14µm	ASTM D7647	>160	20	---	---
Particles >21µm	ASTM D7647	>40	5	---	---
Particles >38µm	ASTM D7647	>10	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/15/11	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	14.8	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.20	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	---	---
Precipitate	scalar	Visual*	NONE	---	---
Silt	scalar	Visual*	NONE	---	---
Debris	scalar	Visual*	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	---	---
Appearance	scalar	Visual*	NORML	---	---
Odor	scalar	Visual*	NORML	---	---
Emulsified Water	scalar	Visual*	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	30.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	167	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0730738
Lab Number : 02519859
Unique Number : 5476839
Test Package : IND 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TAN Man, VI)

Received : 01 Nov 2022
Tested : 02 Nov 2022
Diagnosed : 02 Nov 2022 - Kevin Marson

RTA - UGB
 C.P. 900
 Ville de la Baie, QC
 CA G7B 4G9
 Contact: Alcan Epc
 mathieu.tremblay2@riotinto.com
 T: (418)697-9568
 F: (418)697-9550

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.