



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
091782 TOP IDLER

Component
Left Unknown Component

Fluid
GEAR OIL ISO 220 (--- GAL)



DIAGNOSIS

▲ Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend an early resample to monitor this condition.

▲ Wear

Copper and tin ppm levels are marginal. All other component wear rates are normal.

Contamination

Insufficient sample was received to conduct all the routine laboratory tests. There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

The condition of the sample is acceptable for the time in service (unconfirmed).

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		WC0811291	---	---
Sample Date	Client Info		13 Apr 2023	---	---
Machine Age	hrs	Client Info	885	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			MARGINAL	---	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185(m)	190	---	---
Chromium	ppm	ASTM D5185(m)	2	---	---
Nickel	ppm	ASTM D5185(m)	0	---	---
Titanium	ppm	ASTM D5185(m)	<1	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m)	9	---	---
Lead	ppm	ASTM D5185(m)	113	---	---
Copper	ppm	ASTM D5185(m)	▲ 198	---	---
Tin	ppm	ASTM D5185(m)	▲ 19	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185(m) 50	4	---	---
Barium	ppm	ASTM D5185(m) 15	4	---	---
Molybdenum	ppm	ASTM D5185(m) 15	3	---	---
Manganese	ppm	ASTM D5185(m)	2	---	---
Magnesium	ppm	ASTM D5185(m) 50	9	---	---
Calcium	ppm	ASTM D5185(m) 50	1224	---	---
Phosphorus	ppm	ASTM D5185(m) 350	249	---	---
Zinc	ppm	ASTM D5185(m) 100	256	---	---
Sulfur	ppm	ASTM D5185(m) 12500	13605	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185(m)	30	---	---
Sodium	ppm	ASTM D5185(m)	2	---	---
Potassium	ppm	ASTM D5185(m) >20	4	---	---


VISUAL

	method	limit/base	current	history 1	history 2
White Metal	scalar	Visual* NONE	NONE	---	---
Yellow Metal	scalar	Visual* NONE	NONE	---	---
Precipitate	scalar	Visual* NONE	NONE	---	---
Silt	scalar	Visual* NONE	NONE	---	---
Debris	scalar	Visual* NONE	NONE	---	---
Sand/Dirt	scalar	Visual* NONE	NONE	---	---
Appearance	scalar	Visual* NORML	NORML	---	---
Odor	scalar	Visual* NORML	NORML	---	---
Emulsified Water	scalar	Visual*	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---










OIL ANALYSIS REPORT

▲ Non-ferrous Metals

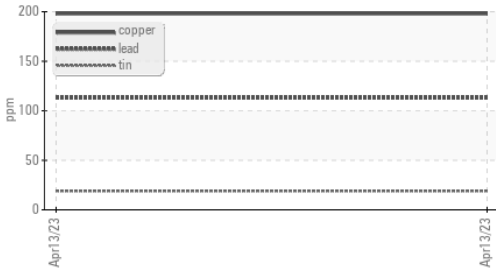

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image

GRAPHS

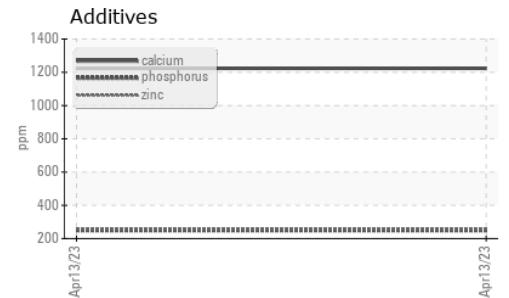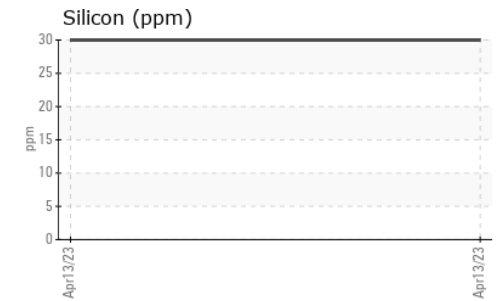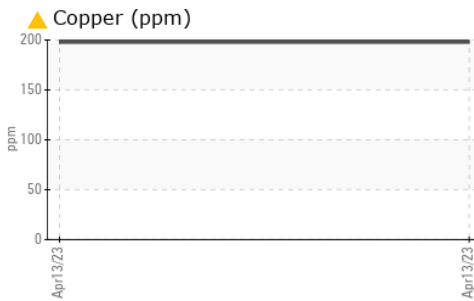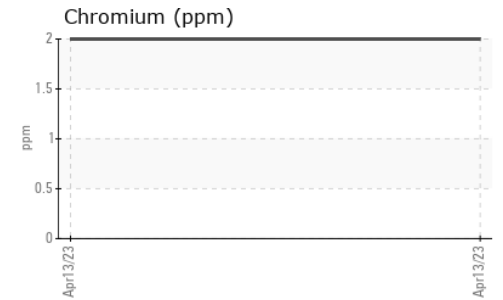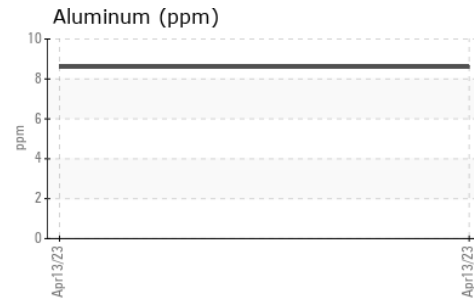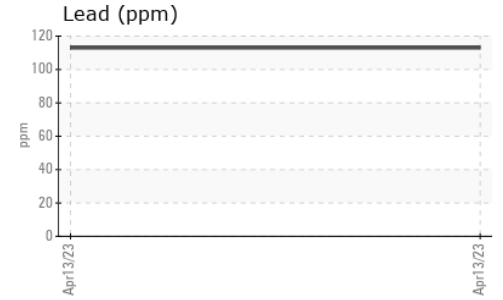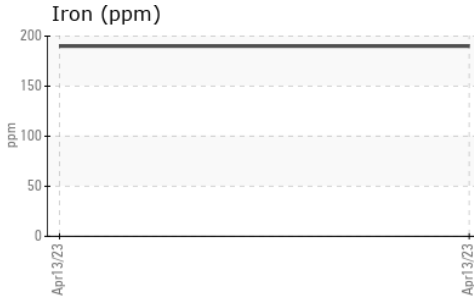

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0811291 **Received** : 26 Apr 2023
Lab Number : 02553800 **Diagnosed** : 27 Apr 2023
Unique Number : 5566815 **Diagnostician** : Kevin Marson
Test Package : MOB 1

C.G. EQUIPMENT
 7367 Wellington Rd. 30, Unit A
 Guelph, ON
 CA N0M 2T0
 Contact: Maureen McDonald
 mmcdonald@cgequipment.com
 T:
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.