




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

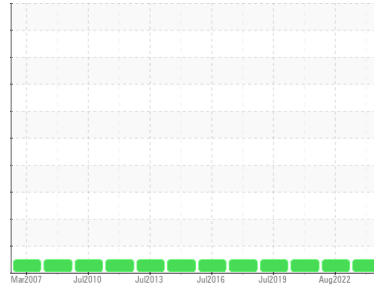

Machine Id
JOHN DEERE M0778
 Component
Diesel Engine
 Fluid
KENDALL 15W40 (22 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0836809	WC0709893	WC0442687
Sample Date	Client Info			01 Aug 2023	29 Aug 2022	18 Aug 2020
Machine Age	hrs	Client Info		297	289	260
Oil Age	hrs	Client Info		16	8	26
Oil Changed	Client Info			Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.1		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	2	2	2
Chromium	ppm	ASTM D5185(m)	>11	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>31	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>26	0	0	<1
Copper	ppm	ASTM D5185(m)	>26	<1	0	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	6.3	4	4	8
Barium	ppm	ASTM D5185(m)	0.6	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0.4	9	8	33
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	277	137	135	630
Calcium	ppm	ASTM D5185(m)	1514	2023	1979	1402
Phosphorus	ppm	ASTM D5185(m)	634	933	843	1025
Zinc	ppm	ASTM D5185(m)	743	1024	967	1174
Sulfur	ppm	ASTM D5185(m)	2592	3024	2901	2928
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	2	3	2
Sodium	ppm	ASTM D5185(m)	>31	2	2	2
Potassium	ppm	ASTM D5185(m)	>20	1	1	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	5.5	5.2	5.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	16.0	15.5	15.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	9.4	9.5	12.8











OIL ANALYSIS REPORT

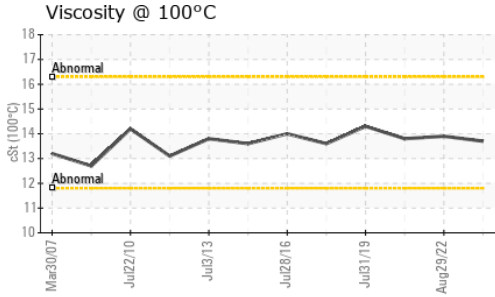

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.21	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	13.7	13.9	13.8

GRAPHS

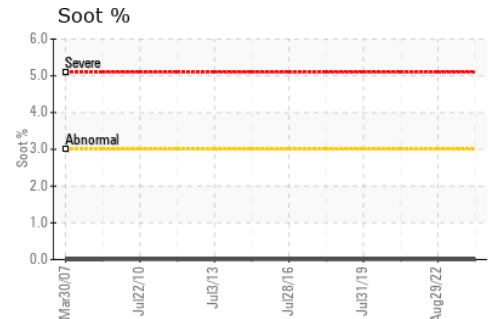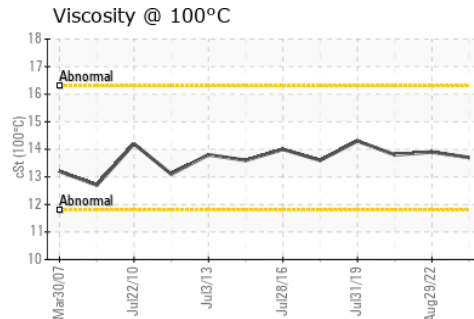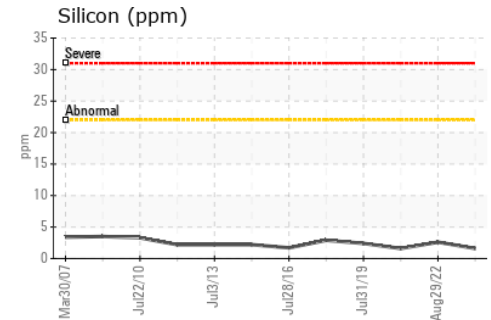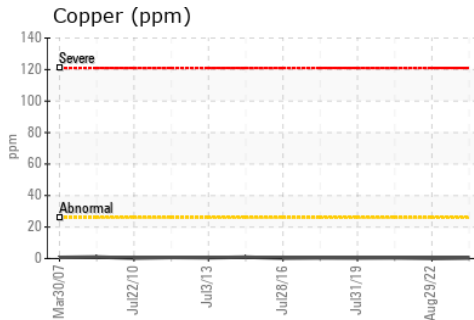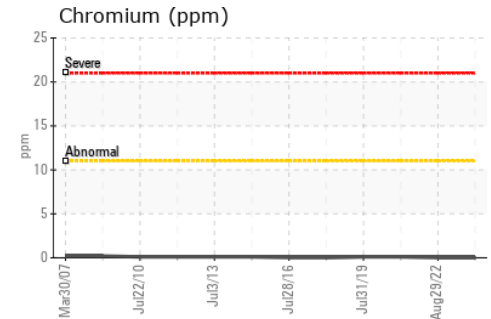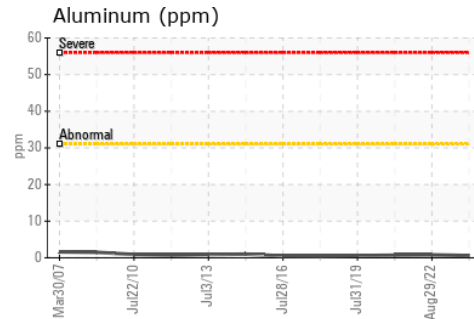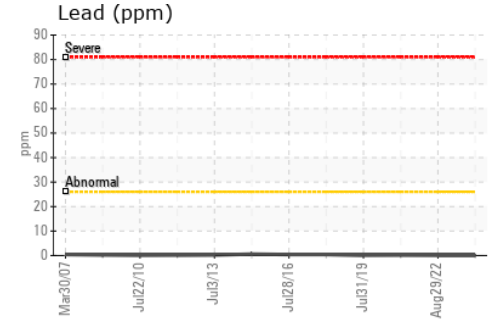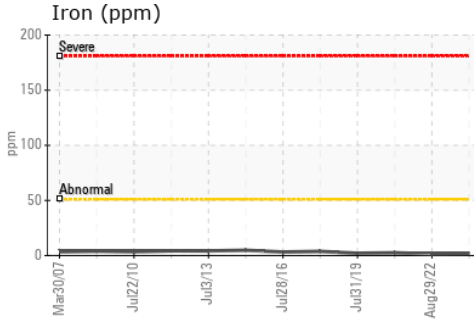

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0836809 **Received** : 10 Aug 2023
Lab Number : 02575066 **Diagnosed** : 10 Aug 2023
Unique Number : 5620117 **Diagnostician** : Wes Davis
Test Package : MOB 1

GENCARE SERVICES LTD.
 360 SOVEREIGN ROAD
 LONDON, ON
 CA N6M 1A8
 Contact: Teresa Matthews
 tmatthews@gencare.com
 T: (519)659-7118
 F: (519)451-1707

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.