




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

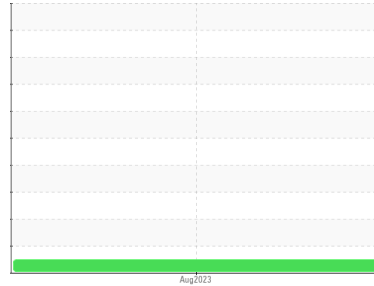

Machine Id  
**NO UNIT WC0479195**

Component  
**Gearbox**  
Fluid  
**MOBIL SHC 629 (100 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0479195</b>	---	---
Sample Date	Client Info		<b>08 Aug 2023</b>	---	---
Machine Age	days	Client Info	<b>1006</b>	---	---
Oil Age	days	Client Info	<b>1006</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m) >200	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m) >100	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >200	<b>0</b>	---	---
Tin	ppm	ASTM D5185(m) >25	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>0</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>433</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>2</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>88</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>13</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.32</b>	---	---



# OIL ANALYSIS REPORT

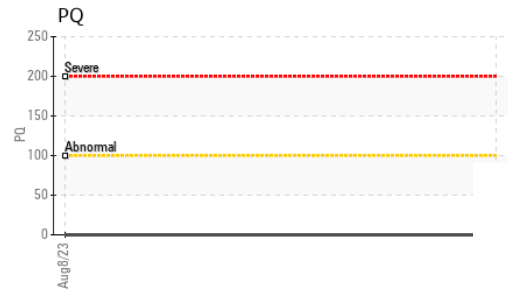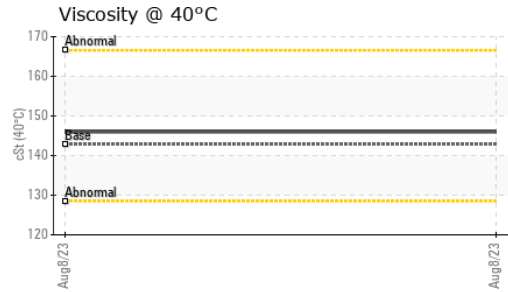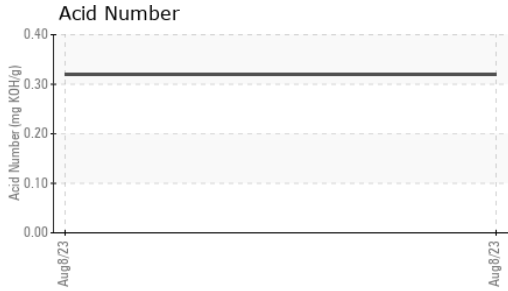






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	142.8	<b>146</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

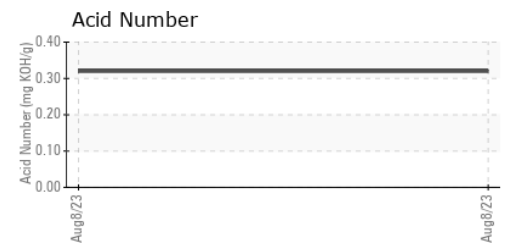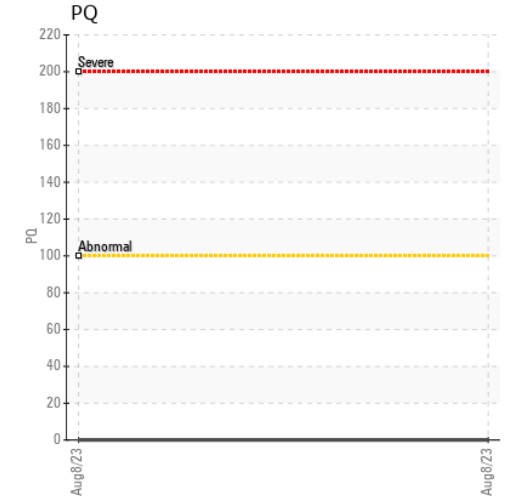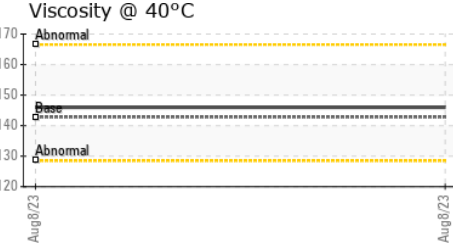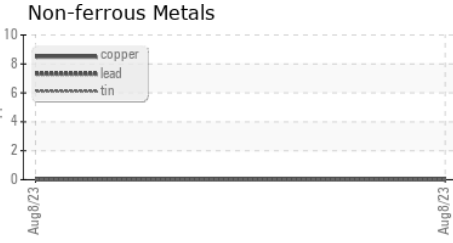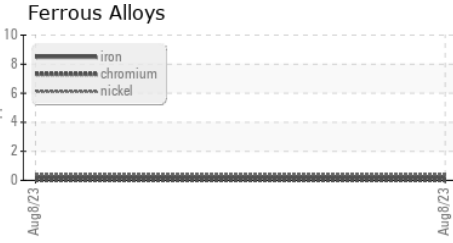

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0479195      **Received** : 16 Aug 2023  
**Lab Number** : **02576264**      **Diagnosed** : 17 Aug 2023  
**Unique Number** : 5629324      **Diagnostician** : Wes Davis  
**Test Package** : IND 2

**NAV CANADA**  
 280 HUNT CLUB ROAD  
 OTTAWA, ON  
 CA K1V 1C1  
 Contact: Shannon Howatt  
 shannon.howatt@navcanada.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T: x:  
 F: x: