

OIL ANALYSIS REPORT

Sample Rating Trend







DOM 2-C Component Gearbox Fluid NOT GIVEN (2 GAL)

DIAGNOSIS

Area [73902]

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Light concentration of visible metal present.

Contamination

Light concentration of visible dirt/debris present in the oil.


Fluid Condition

Viscosity of sample indicates oil is within SAE 50 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0850452		
Sample Date		Client Info		18 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		3		
Iron	ppm	ASTM D5185(m)	>200	33		
Chromium	ppm	ASTM D5185(m)	>10	<1		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	0		
Lead	ppm	ASTM D5185(m)	>50	0		
Copper	ppm	ASTM D5185(m)	>200	<1		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		5		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		3		
Phosphorus	ppm	ASTM D5185(m)		220		
Zinc	ppm	ASTM D5185(m)		4		
Sulfur	ppm	ASTM D5185(m)		1737		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	12		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.40		



OIL ANALYSIS REPORT

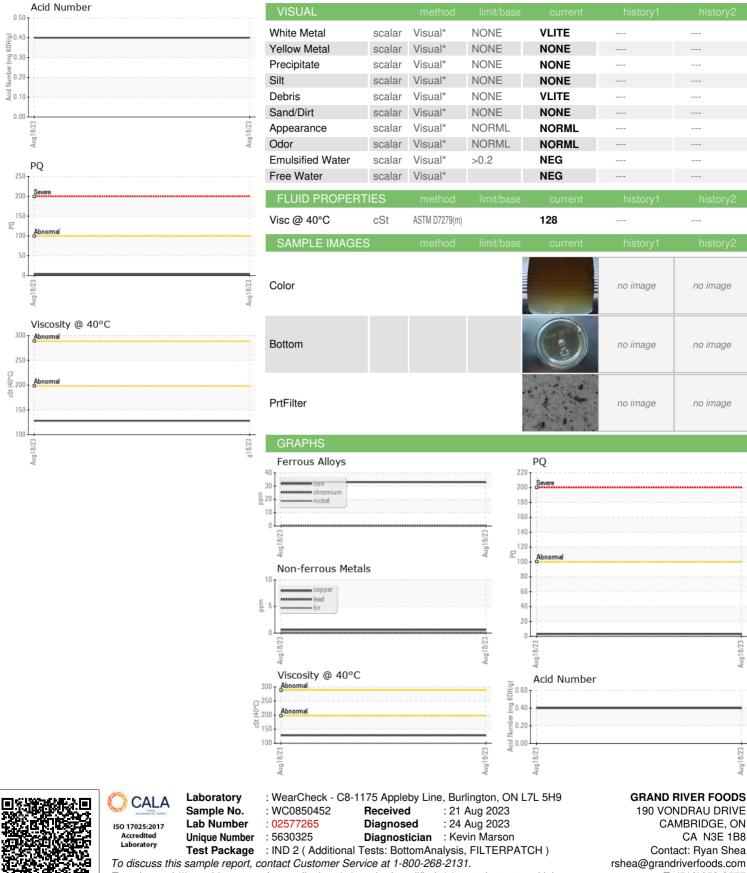

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Ryan Shea - GRA685CAM

CAMBRIDGE, ON

Contact: Ryan Shea

T: (519)653-3577

CA N3E 1B8

8/23

F:

no image

no image

no image