




# OIL ANALYSIS REPORT

Sample Rating Trend

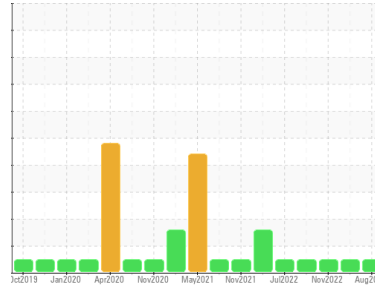

**NORMAL**



Machine Id  
**Grande West Vicinity 1848**

Component  
**Natural Gas Engine**

Fluid  
**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0830217</b>	WC0811578	WC0748363
Sample Date	Client Info		<b>19 Aug 2023</b>	24 May 2023	17 Nov 2022
Machine Age	kms	Client Info	<b>0</b>	154870	0
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>9</b>	9	12
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	1	2
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>35	<b>6</b>	3	2
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>9</b>	15	8
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>51</b>	48	51
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>877</b>	826	862
Calcium	ppm	ASTM D5185(m)		<b>1262</b>	1280	1346
Phosphorus	ppm	ASTM D5185(m)		<b>755</b>	747	766
Zinc	ppm	ASTM D5185(m)		<b>892</b>	843	877
Sulfur	ppm	ASTM D5185(m)		<b>1893</b>	1919	1963
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>10</b>	9	12
Sodium	ppm	ASTM D5185(m)		<b>4</b>	4	5
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>14.1</b>	12.6	14.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>26.8</b>	25.0	28.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>24.8</b>	22.5	26.0











# OIL ANALYSIS REPORT

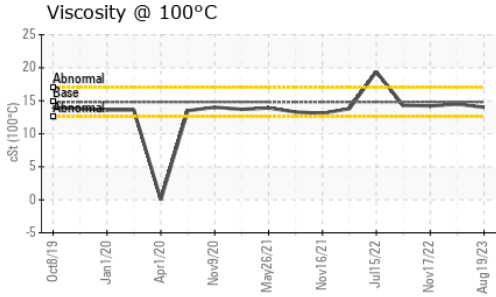

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	VLITE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	VLITE
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>14.0</b>	14.5	14.2

### GRAPHS

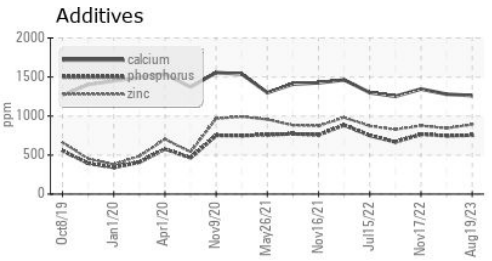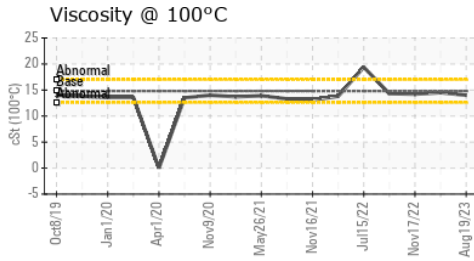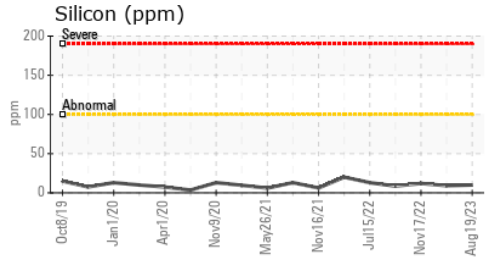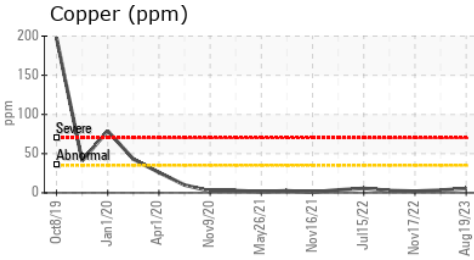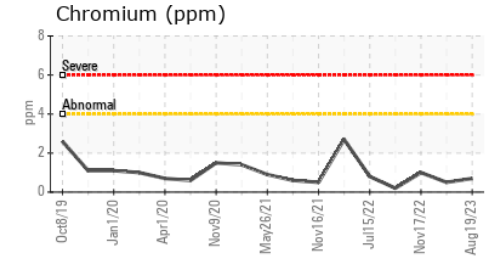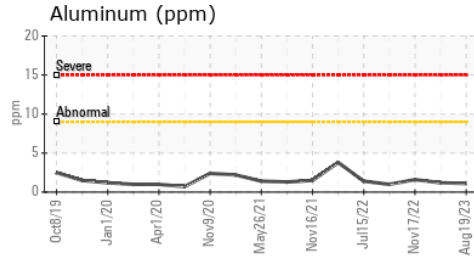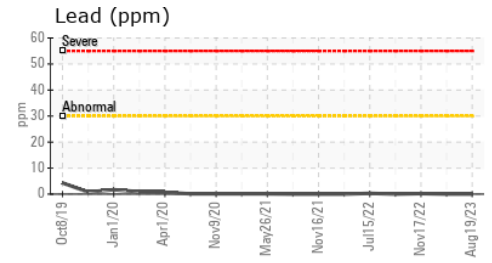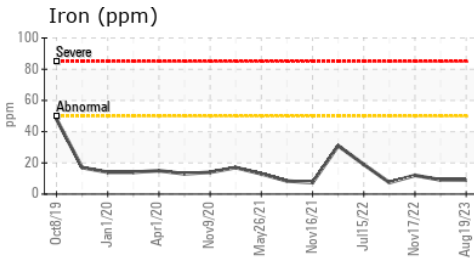

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0830217      **Received** : 22 Aug 2023  
**Lab Number** : 02577390      **Diagnosed** : 22 Aug 2023  
**Unique Number** : 5630450      **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.