


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

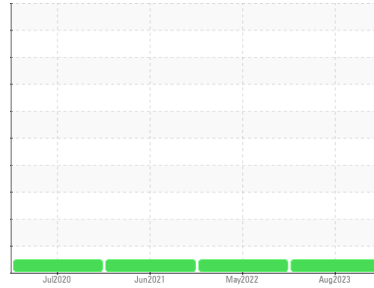

Machine Id  
**BLISS P14**  
 Component  
**Gear Lube System**  
 Fluid  
**RENOLIN EP 150 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>AW0003854</b>	AW0003945	AW0003869
Sample Date	Client Info			<b>28 Aug 2023</b>	26 May 2022	21 Jun 2021
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Not Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	<b>11</b>	13	11
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>100	<b>3</b>	3	4
Copper	ppm	ASTM D5185(m)	>50	<b>22</b>	22	47
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	1
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	4	2
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>1</b>	1	1
Calcium	ppm	ASTM D5185(m)		<b>6</b>	8	6
Phosphorus	ppm	ASTM D5185(m)		<b>184</b>	146	128
Zinc	ppm	ASTM D5185(m)		<b>9</b>	10	9
Sulfur	ppm	ASTM D5185(m)		<b>7517</b>	9771	7429
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>1</b>	2	5
Sodium	ppm	ASTM D5185(m)		<b>4</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	2	2








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>VLITE</b>	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG
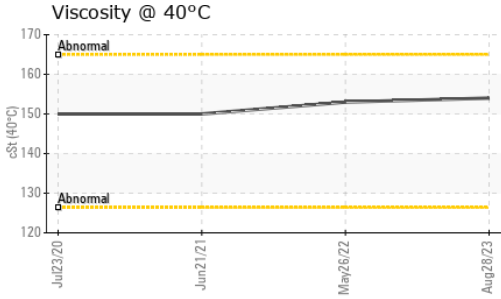
# OIL ANALYSIS REPORT






FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>154</b>	153	150

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color						
Bottom						
PrtFilter		no image	no image			

## GRAPHS

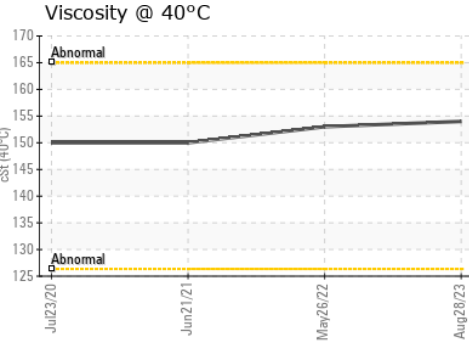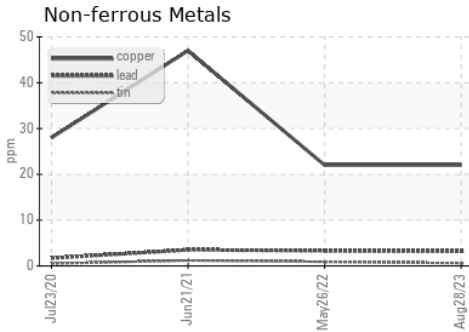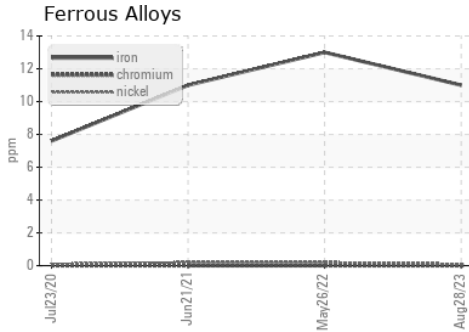

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : AW0003854  
**Lab Number** : 02580028  
**Unique Number** : 5633088  
**Test Package** : IND 1 ( Additional Tests: Bottom, BottomAnalysis, FilterPatch )

**Received** : 01 Sep 2023  
**Diagnosed** : 07 Sep 2023  
**Diagnostician** : Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**MARTINREA INTERNATIONAL**  
 30 AVIVA PARK DRIVE  
 VAUGHAN, ON  
 CA L4L 9C7  
 Contact: Ken Young  
 ken.young@martinrea.com  
 T: (905)264-0149  
 F: (416)264-1828