

OIL ANALYSIS REPORT

BRICKETTER

Component

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

Sample Rating Trend **NORMAL**

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				0692023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0857820		
Sample Date		Client Info		26 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)	<i>></i> 20	0		
Silver		ASTM D5185(m)		<1		
	ppm	. ,	. 20	0		
Aluminum	ppm	ASTM D5185(m)	>20	-		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1		
Barium	ppm	ASTM D5185(m)	5	<1		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	25	0		
Calcium	ppm	ASTM D5185(m)	200	41		
Phosphorus	ppm	ASTM D5185(m)	300	331		
Zinc	ppm	ASTM D5185(m)	370	407		
Sulfur	ppm	ASTM D5185(m)	2500	993		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	NESS _	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3086		
Particles >6µm		ASTM D7647	>1300	1156		
Particles >14µm		ASTM D7647	>160	128		
Particles >21µm		ASTM D7647	>40	33		
Particles >38µm		ASTM D7647	>10	3		
Particles >71µm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/14		
FLUID DEGRADA		method	limit/base		history1	history2
Acid Number (AN)	ma K∩U/a	A STM DO7/1*	0.57	0.30		



OIL ANALYSIS REPORT

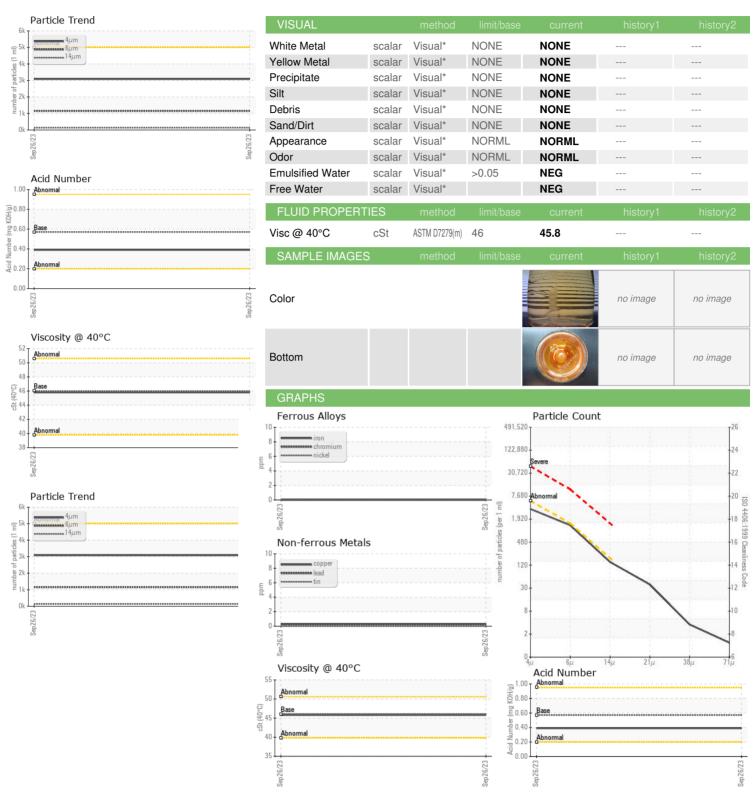



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WC0857820 : 02586434 : 5655500 Test Package : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 03 Oct 2023 Diagnosed

: 04 Oct 2023 : Wes Davis Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

ASTREX 383 PATILLO RD WINDSOR, ON **CA N8N 2L9** Contact: John Goetz john.goetz@astrex.ca T: (226)350-4422