




PROBLEM SUMMARY

Area
BOF/VESSELS
 Machine Id
A - 8 North Slag Pot Transfer Car Driver Gear Box
 Component
Gearbox
 Fluid
SHELL OMALA 220 (24 GAL)

Sample Rating Trend

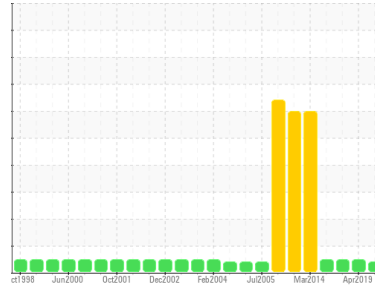


VISCOSITY



COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

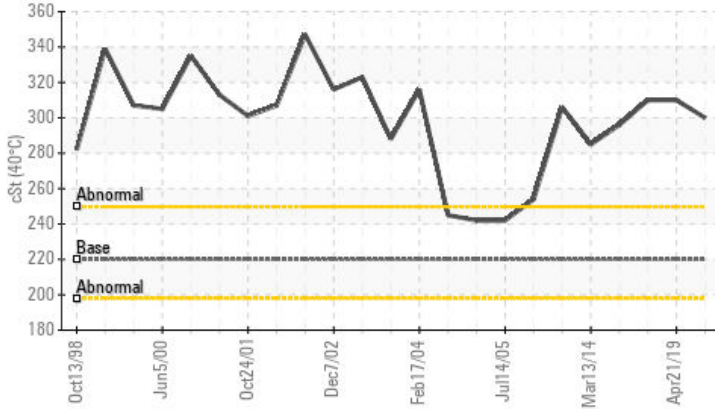

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	NORMAL	NORMAL
Visc @ 40°C	cSt	▲ 300	310	310

Customer Id: LEWBOSC
 Sample No.: WC0866327
 Lab Number: 02586917
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

21 Apr 2019 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



12 Sep 2018 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



20 Jan 2015 Diag: Bill Quesnel

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

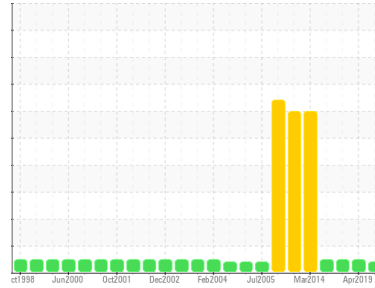

VISCOSITY



Area
BOF/VESSELS
 Machine Id
A - 8 North Slag Pot Transfer Car Driver Gear Box
 Component
Gearbox
 Fluid
SHELL OMALA 220 (24 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

Viscosity of sample indicates oil is within ISO 320 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0866327	WC02273775	WC22131645
Sample Date	Client Info		04 Oct 2023	21 Apr 2019	12 Sep 2018
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>DFLT	5	54	24
Iron	ppm	ASTM D5185(m)	>200	122	117
Chromium	ppm	ASTM D5185(m)	>15	<1	<1
Nickel	ppm	ASTM D5185(m)	>15	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0
Silver	ppm	ASTM D5185(m)		<1	0
Aluminum	ppm	ASTM D5185(m)	>25	1	1
Lead	ppm	ASTM D5185(m)	>100	1	1
Copper	ppm	ASTM D5185(m)	>200	5	4
Tin	ppm	ASTM D5185(m)	>25	0	0
Antimony	ppm	ASTM D5185(m)	>5	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0
Beryllium	ppm	ASTM D5185(m)		0	0
Cadmium	ppm	ASTM D5185(m)		0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	4.4	<1	1
Barium	ppm	ASTM D5185(m)	0.0	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0
Manganese	ppm	ASTM D5185(m)		2	2
Magnesium	ppm	ASTM D5185(m)	0	6	6
Calcium	ppm	ASTM D5185(m)	0	14	13
Phosphorus	ppm	ASTM D5185(m)	215	240	289
Zinc	ppm	ASTM D5185(m)	0	8	8
Sulfur	ppm	ASTM D5185(m)	7039	9351	10274
Lithium	ppm	ASTM D5185(m)		<1	<1






CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	2	3
Sodium	ppm	ASTM D5185(m)		1	<1
Potassium	ppm	ASTM D5185(m)	>20	0	0

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		449465	341377	190368
Particles >6µm	ASTM D7647	>10240000	385536	306775	172915
Particles >14µm	ASTM D7647	>10240000	101580	140143	85175
Particles >21µm	ASTM D7647	>2560000	11220	55931	38932
Particles >38µm	ASTM D7647	>640000	114	65	209
Particles >71µm	ASTM D7647	>160000	2	0	5
Oil Cleanliness	ISO 4406 (c)	>--/30/30	26/26/24	26/25/24	25/25/24

OIL ANALYSIS REPORT

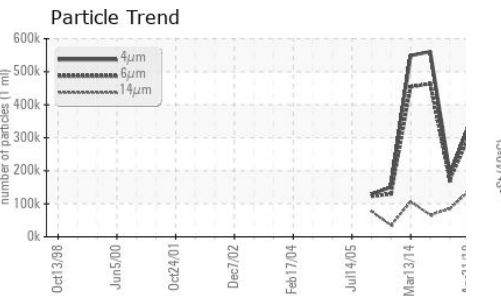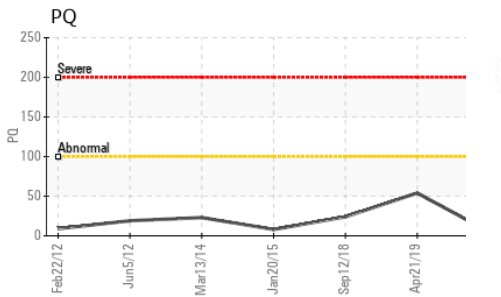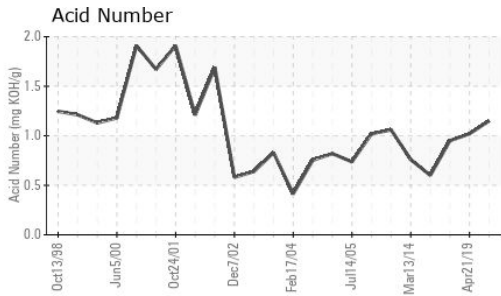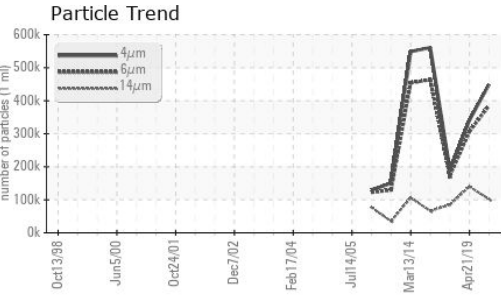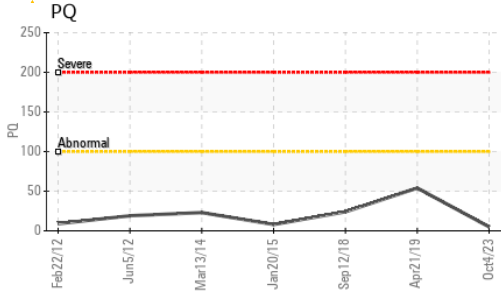


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		1.15	1.02	0.950






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	LTMOD	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>5	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	▲ 300	310	310

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

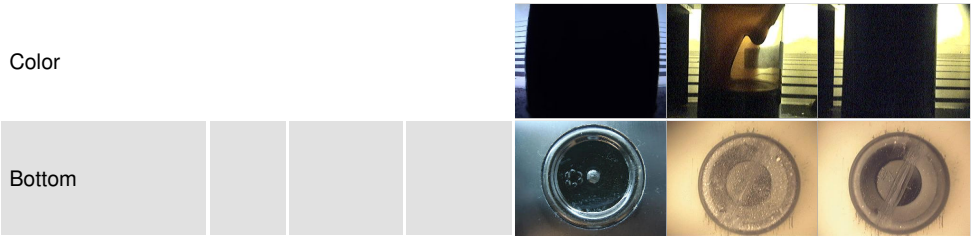

GRAPHS

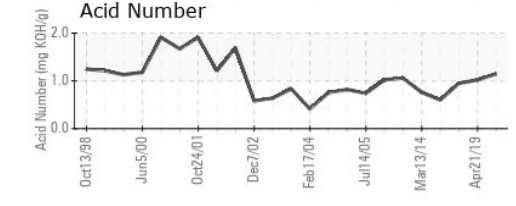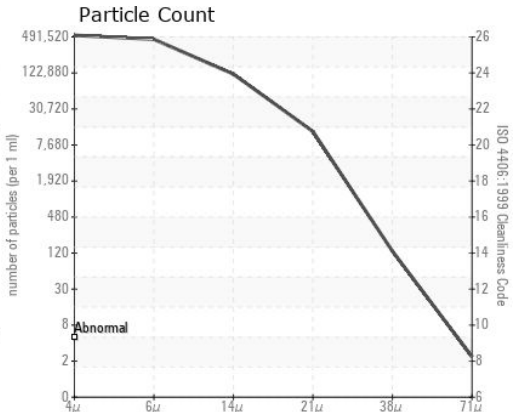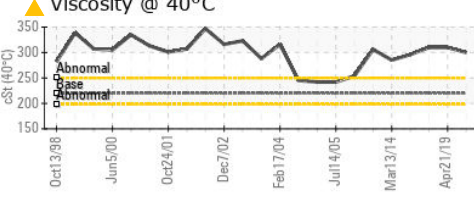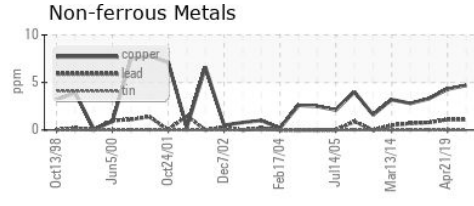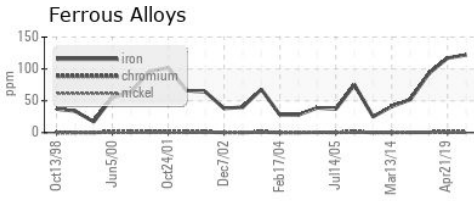

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **STELCO - BOSC - Basic Oxygen Slab Caster**
Sample No. : WC0866327 **Received** : 04 Oct 2023 2330 Regional Road #3, Door: BOSC8
Lab Number : **02586917** **Diagnosed** : 05 Oct 2023 NANTICOKE, ON
Unique Number : 5655983 **Diagnostician** : Kevin Marson CA N0A 1L0
Test Package : IND 2 (Additional Tests: PQ, PrtCount, TAN Man)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Tom Walden
 Thomas.Walden@stelco.com
 T: (519)587-4541
 F: (519)587-7702