




OIL ANALYSIS REPORT

Sample Rating Trend

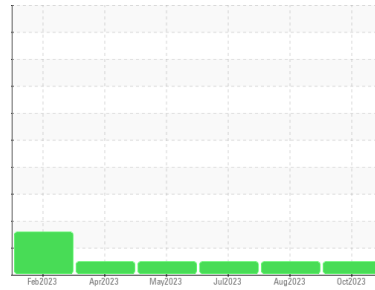

NORMAL



Machine Id

2201

Component

Natural Gas Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0849774	WC0830248	WC0830310
Sample Date	Client Info		04 Oct 2023	19 Aug 2023	05 Jul 2023
Machine Age	kms	Client Info	48072	0	32063
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	7	7	6
Chromium	ppm	ASTM D5185(m) >4	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >2	<1	<1	0
Titanium	ppm	ASTM D5185(m)	0	<1	<1
Silver	ppm	ASTM D5185(m) >3	<1	0	0
Aluminum	ppm	ASTM D5185(m) >9	1	1	1
Lead	ppm	ASTM D5185(m) >30	<1	0	0
Copper	ppm	ASTM D5185(m) >35	<1	<1	1
Tin	ppm	ASTM D5185(m) >4	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	12	12	23
Barium	ppm	ASTM D5185(m) 10	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 100	53	52	50
Manganese	ppm	ASTM D5185(m)	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 450	800	812	785
Calcium	ppm	ASTM D5185(m) 3000	1215	1217	1216
Phosphorus	ppm	ASTM D5185(m) 1150	653	698	791
Zinc	ppm	ASTM D5185(m) 1350	887	871	853
Sulfur	ppm	ASTM D5185(m) 4250	1957	1981	1941
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	6	11	13
Sodium	ppm	ASTM D5185(m) >158	2	1	4
Potassium	ppm	ASTM D5185(m) >20	0	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	11.9	9.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.3	20.8

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.5	18.2

VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG











OIL ANALYSIS REPORT

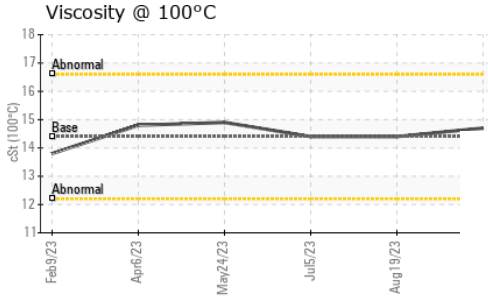

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.7	14.4	14.4

GRAPHS

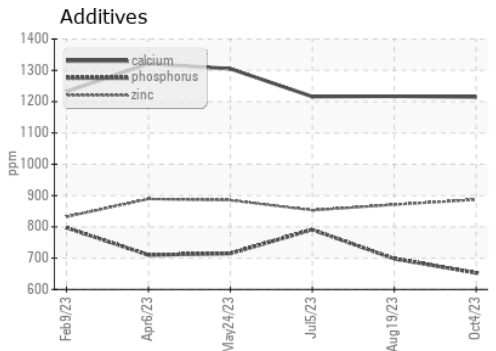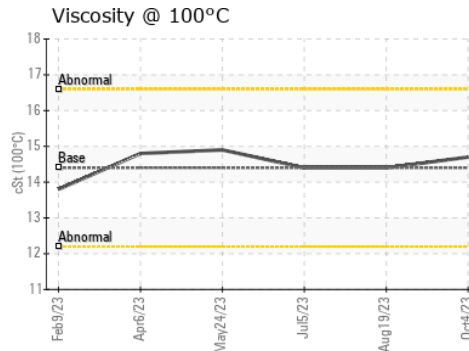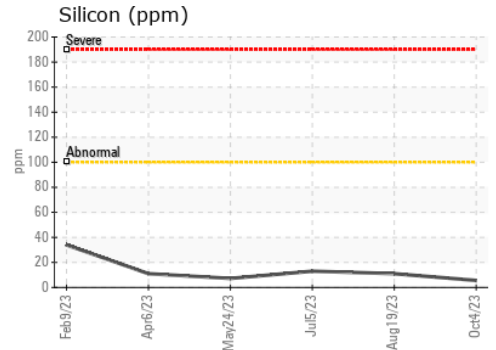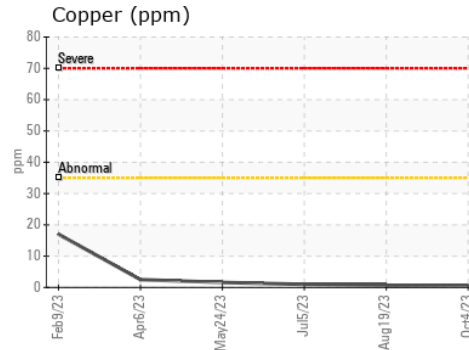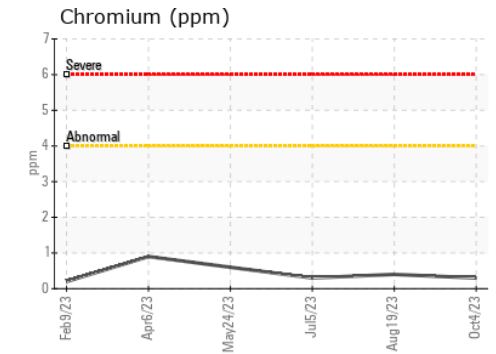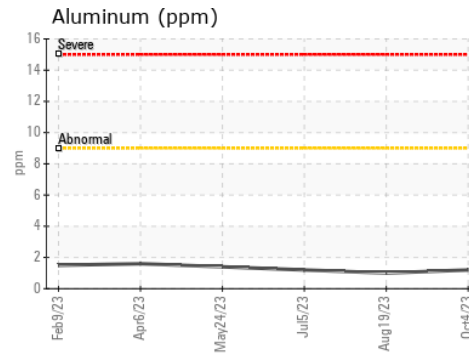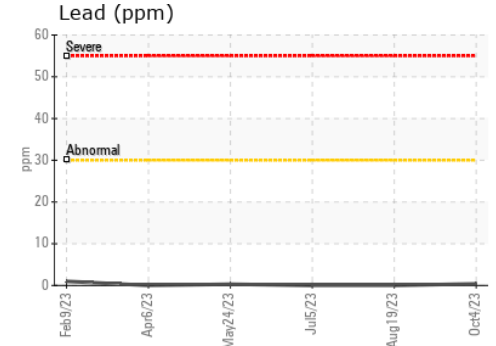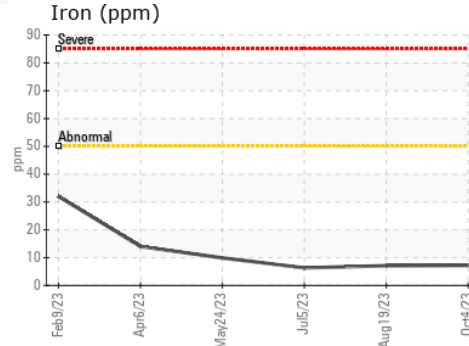

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : WC0849774
 Lab Number : 02588215
 Unique Number : 5657281
 Test Package : MOB 1

Received : 11 Oct 2023
 Diagnosed : 11 Oct 2023
 Diagnostician : Wes Davis

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Jeff Parr
 jeff.parr@hamilton.ca
 T: (905)546-2424
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.