

COOLANT REPORT

Sample Rating Trend

APPEARANCE





Machine Id 0J030445

Component Coolant HYBRID (HOAT) COOLANT (--- GAL)

DIAGNOSIS

Recommendation

We recommend drain system, and refill with 50/50 antifreeze water mixture. We advise that you replenish the supplemental coolant additives (SCAs) and add per manufacturer's specifications. Recommend that you ensure the same technology coolant is being used for make-up. We recommend an early resample to monitor this condition.

Corrosion

Lead ppm levels are abnormal. The high metal levels indicate corrosion in the system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

The coolant is cloudy indicating either an overconcentration of coolant additives, or a mixing of incompatible coolant technologies. The specific gravity is lower than typical indicating the addition of a different type of coolant. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0857575		
Sample Date		Client Info		27 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
PHYSICAL TEST R	ESULTS	method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*		1.052		
pН	Scale 0-14	ASTM D1287*		8.37		
Nitrites	ppm	Alcan Test Kit*		240		
Reserve Alkalinity	Scale 0-20	ASTM D1121*		2.4		
Percentage Glycol	%	ASTM D3321*		38.3		
Freezing Point	°C	ASTM D3321*		-9		
Carboxylate						
CORROSION INH	IBITORS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		48		
Phosphorus	ppm	ASTM D5185(m)		27		
Boron	ppm	ASTM D5185(m)		16		
Molybdenum	ppm	ASTM D5185(m)		15		
CORROSION		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>15	5		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Copper	ppm	ASTM D5185(m)	>10	0		
Lead	ppm	ASTM D5185(m)	>10	<u> </u>		
Tin	ppm	ASTM D5185(m)	>10	<1		
Silver	ppm	ASTM D5185(m)	>10	<1		
Zinc	ppm	ASTM D5185(m)		0		
CARRIER SALTS		method	limit/base	current	history1	history2
Sodium	ppm	ASTM D5185(m)		1091		
Potassium	ppm	ASTM D5185(m)		2558		
SCALE POTENTI	AL	method	limit/base	current	history1	history2
Calcium	ppm	ASTM D5185(m)	>100	2		
Magnesium	ppm	ASTM D5185(m)	>40	- <1		
Hardness	mg/L CaCO3	In-house*	<75	6		
VISUAL	-	method	limit/base	current	history1	history2
Coolant Color		Visual*		Orange		
Coolant Appearance		Visual*	Clear	Very cld		
Color					no image	no image
Bottom					no image	no image
:34:56) Bev: 1			C	ontact/Location:		

Report Id: GENNEP [WCAMIS] 02588433 (Generated: 10/16/2023 13:34:56) Rev: 1

Contact/Location: BRENDA PINSENT - GENNEP



COOLANT REPORT

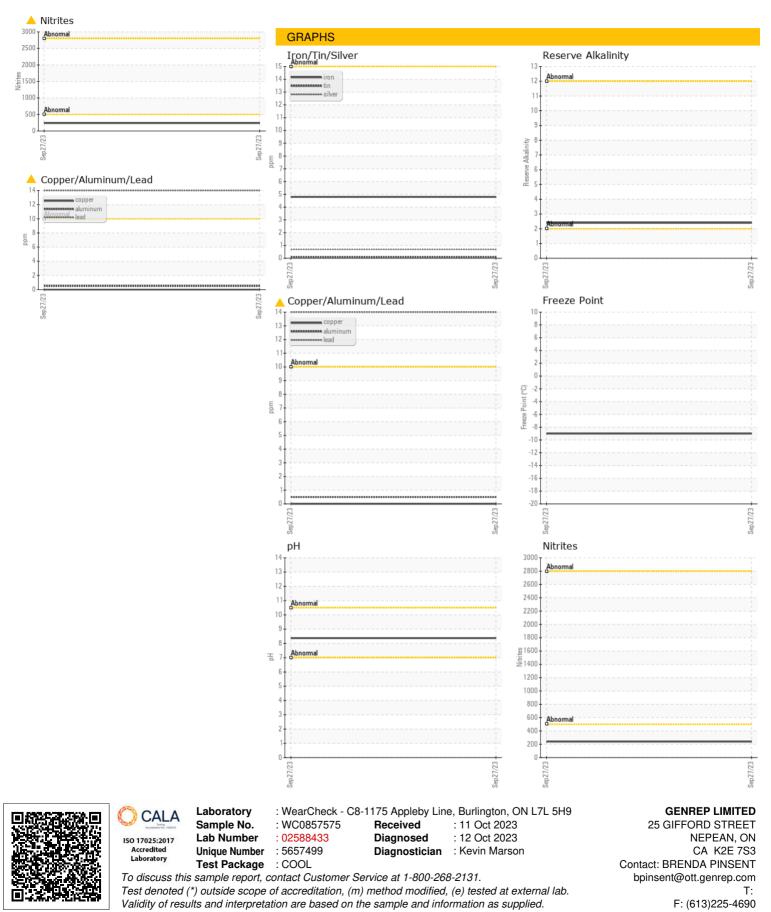

Contact/Location: BRENDA PINSENT - GENNEP