



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
GLENGARRY GIRL II
 Machine Id
STARBOARD MAIN ENGINE
 Component
Starboard Main Engine
 Fluid
MERCURY 25W40 (9 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Light concentration of visible metal present. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0781743	---	---
Sample Date	Client Info		16 Oct 2023	---	---
Machine Age	hrs	Client Info	1000	---	---
Oil Age	hrs	Client Info	30	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >75	5	---	---
Chromium	ppm	ASTM D5185(m) >8	0	---	---
Nickel	ppm	ASTM D5185(m) >2	0	---	---
Titanium	ppm	ASTM D5185(m) >3	0	---	---
Silver	ppm	ASTM D5185(m) >2	<1	---	---
Aluminum	ppm	ASTM D5185(m) >15	3	---	---
Lead	ppm	ASTM D5185(m) >18	2	---	---
Copper	ppm	ASTM D5185(m) >80	11	---	---
Tin	ppm	ASTM D5185(m) >14	<1	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	146	---	---
Barium	ppm	ASTM D5185(m)	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	50	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	10	---	---
Calcium	ppm	ASTM D5185(m)	2098	---	---
Phosphorus	ppm	ASTM D5185(m)	724	---	---
Zinc	ppm	ASTM D5185(m)	835	---	---
Sulfur	ppm	ASTM D5185(m)	1888	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	7	---	---
Sodium	ppm	ASTM D5185(m) >75	2	---	---
Potassium	ppm	ASTM D5185(m) >20	0	---	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624* >20	7.5	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	16.5	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	12.1	---	---






OIL ANALYSIS REPORT

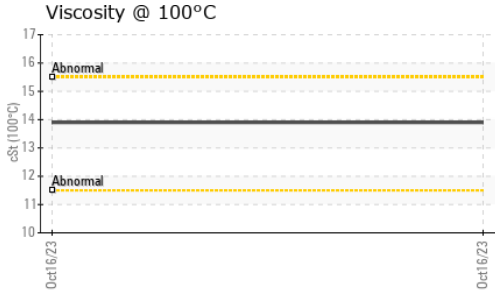

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	13.9	---	---

GRAPHS

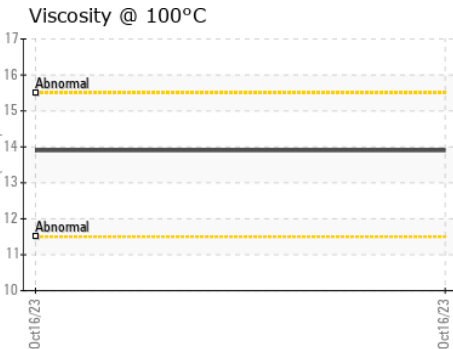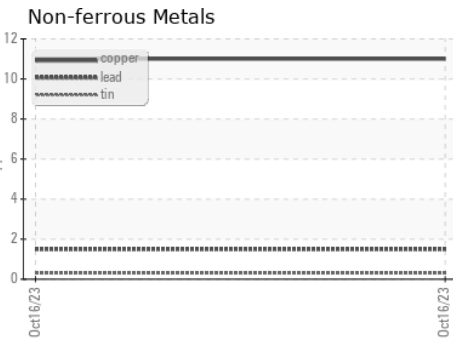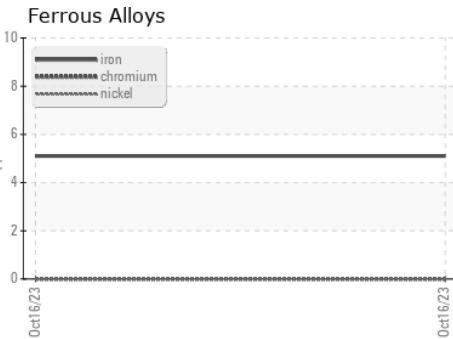

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0781743 **Received** : 23 Oct 2023
Lab Number : **02590822** **Diagnosed** : 26 Oct 2023
Unique Number : 5659888 **Diagnostician** : Kevin Marson
Test Package : MAR 1 (Additional Tests: BottomAnalysis, FILTERPATCH)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GERRY WARD
 244 MOUNTAIN PARK AVE
 HAMILTON, ON
 CA L8V 1A4
 Contact: Gerry Ward
 gerry.ward54@gmail.com
 T: (905)973-6135
 F: