




PROBLEM SUMMARY

Area
[412502959]
 Machine Id
3520-270 High Pressure Pump #1
 Component
Pump
 Fluid
TOTAL FINA NEVASTANE FG AW 68 (--- LTR)

Sample Rating Trend

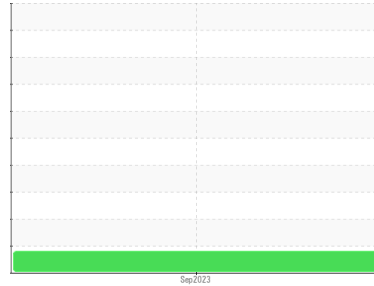


ISO




COMPONENT CONDITION SUMMARY

▲ Particle Trend

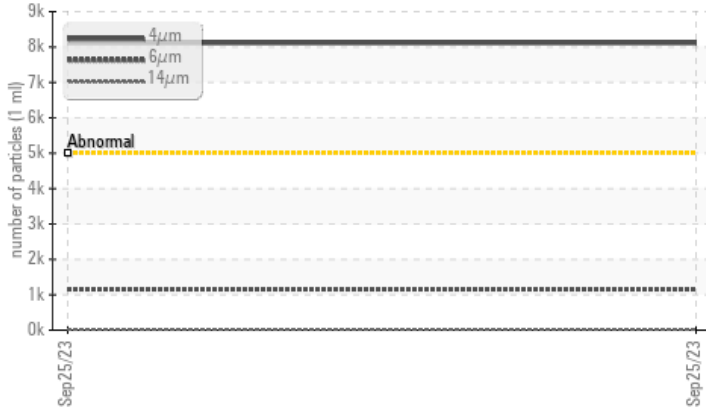

Non-ferrous Metals

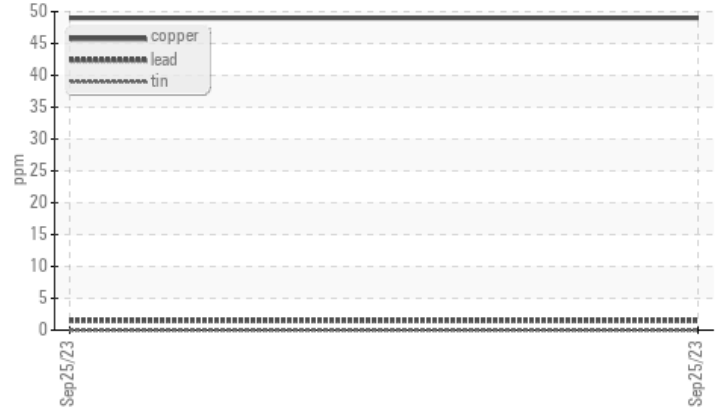

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status	ATTENTION	---	---
Particles >4µm	ASTM D7647 >5000 ▲ 8114	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14 ▲ 20/17/12	---	---

Customer Id: CARGUE
 Sample No.: WC0848520
 Lab Number: 02591395
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area
[412502959]
 Machine Id
3520-270 High Pressure Pump #1
 Component
Pump
 Fluid
TOTAL FINA NEVASTANE FG AW 68 (--- LTR)

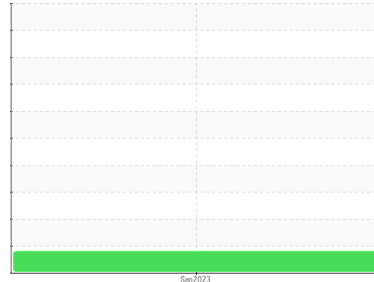

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0848520	---	---
Sample Date	Client Info	25 Sep 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ATTENTION	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>90	10	---	---
Chromium ppm ASTM D5185(m)	>5	0	---	---
Nickel ppm ASTM D5185(m)	>5	<1	---	---
Titanium ppm ASTM D5185(m)	>3	0	---	---
Silver ppm ASTM D5185(m)	>3	<1	---	---
Aluminum ppm ASTM D5185(m)	>7	0	---	---
Lead ppm ASTM D5185(m)	>12	2	---	---
Copper ppm ASTM D5185(m)	>30	49	---	---
Tin ppm ASTM D5185(m)	>9	0	---	---
Antimony ppm ASTM D5185(m)		0	---	---
Vanadium ppm ASTM D5185(m)		0	---	---
Beryllium ppm ASTM D5185(m)		0	---	---
Cadmium ppm ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)		<1	---	---
Barium ppm ASTM D5185(m)		0	---	---
Molybdenum ppm ASTM D5185(m)		0	---	---
Manganese ppm ASTM D5185(m)		0	---	---
Magnesium ppm ASTM D5185(m)		4	---	---
Calcium ppm ASTM D5185(m)		5	---	---
Phosphorus ppm ASTM D5185(m)		181	---	---
Zinc ppm ASTM D5185(m)		57	---	---
Sulfur ppm ASTM D5185(m)		266	---	---
Lithium ppm ASTM D5185(m)		<1	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>60	<1	---	---
Sodium ppm ASTM D5185(m)		2	---	---
Potassium ppm ASTM D5185(m)	>20	<1	---	---

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	▲ 8114	---	---
Particles >6µm ASTM D7647	>1300	1156	---	---
Particles >14µm ASTM D7647	>160	21	---	---
Particles >21µm ASTM D7647	>40	3	---	---
Particles >38µm ASTM D7647	>10	1	---	---
Particles >71µm ASTM D7647	>3	0	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	▲ 20/17/12	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D974*		0.41	---	---



OIL ANALYSIS REPORT

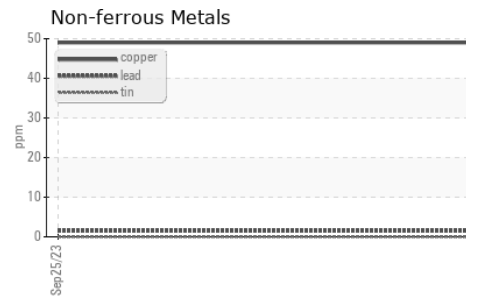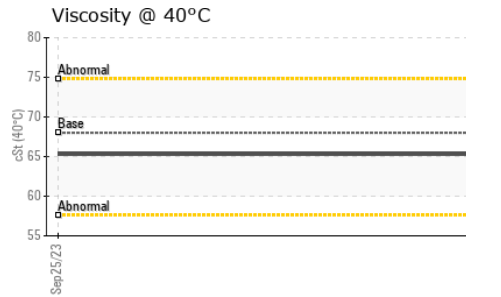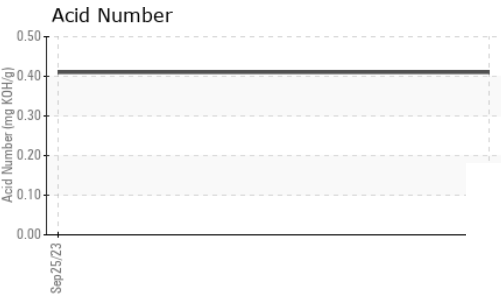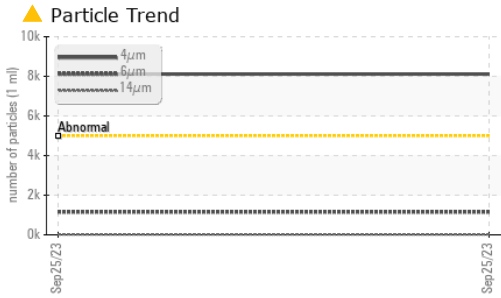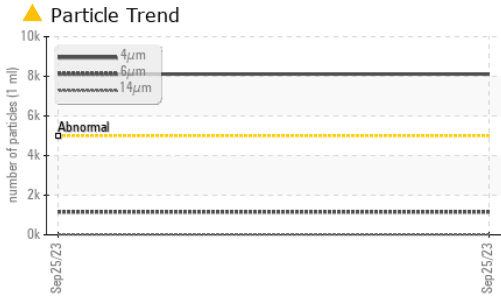





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	65.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

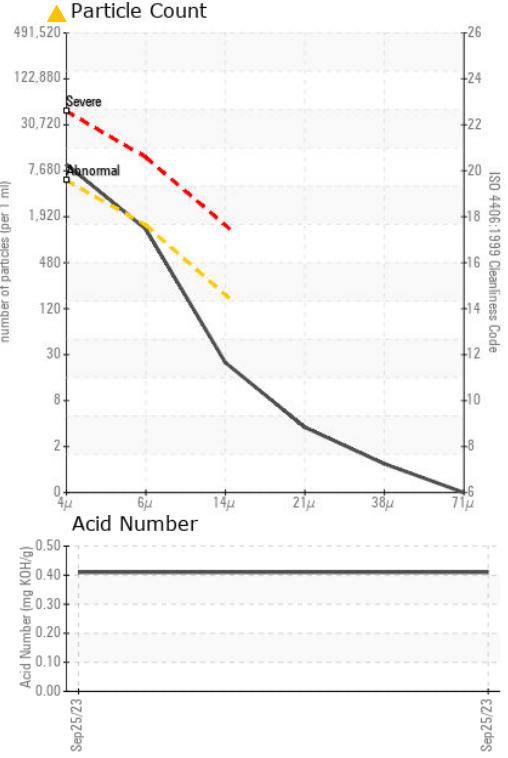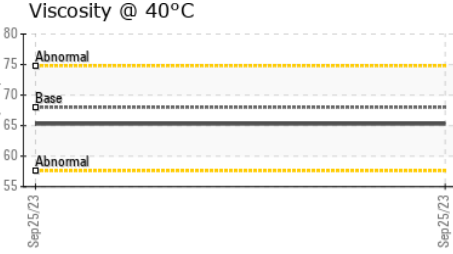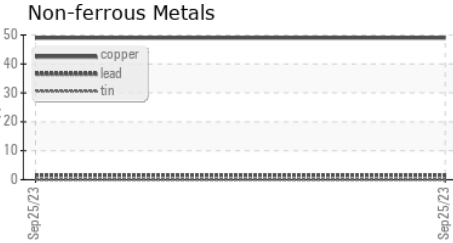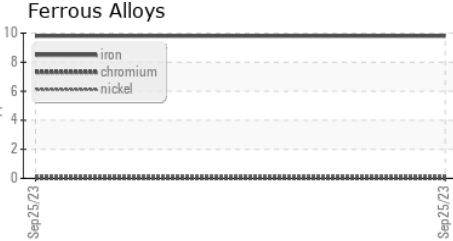

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0848520 **Received** : 24 Oct 2023
Lab Number : 02591395 **Diagnosed** : 25 Oct 2023
Unique Number : 5668474 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: PrtCount, TAN Man)

Cargill Meat Solutions
 165 Dunlop Drive
 Guelph, ON
 CA N1L 1P4
 Contact: Jakub Posluszny
 jakub_posluszny@cargill.com
 T: (519)823-5200
 F: (519)823-5893

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.