



Machine Id

**G1-CESH**

Component

**Hydraulic System**

Fluid

**AW HYDRAULIC OIL ISO 32 (150 GAL)**



## DIAGNOSIS

### Recommendation

Nous recommandons le remplacement des filtres de ce composant. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Il y a une légère quantité de limon (particules de 4 à 14 microns) dans l'huile. La teneur en eau est négligeable.

### Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>ST43460</b>	---	---
Sample Date	Client Info		<b>20 Sep 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<b>1</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >10	<b>8</b>	---	---
Copper	ppm	ASTM D5185(m) >75	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 25	<b>8</b>	---	---
Calcium	ppm	ASTM D5185(m) 200	<b>78</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 300	<b>319</b>	---	---
Zinc	ppm	ASTM D5185(m) 370	<b>408</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2500	<b>917</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---





## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>5</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	---	---
Water	%	ASTM D6304* >0.1	<b>0.002</b>	---	---
ppm Water	ppm	ASTM D6304* >1000	<b>15.5</b>	---	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 5196</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>308</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>17</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>7</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>2</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 20/15/11</b>	---	---

# OIL ANALYSIS REPORT

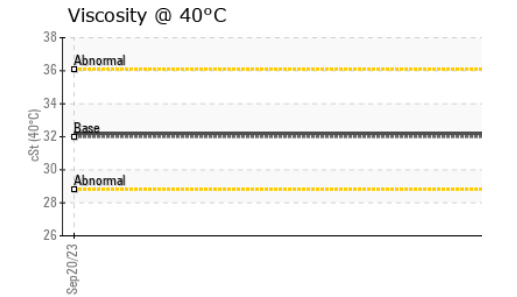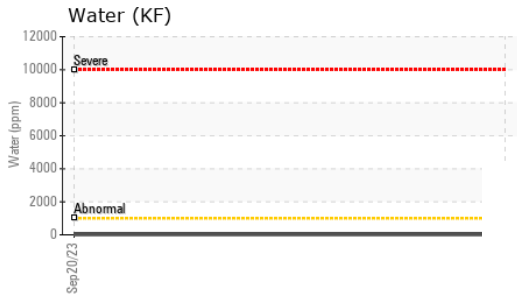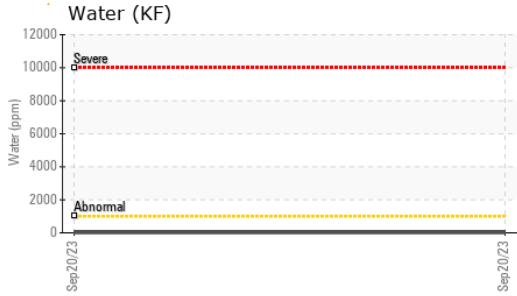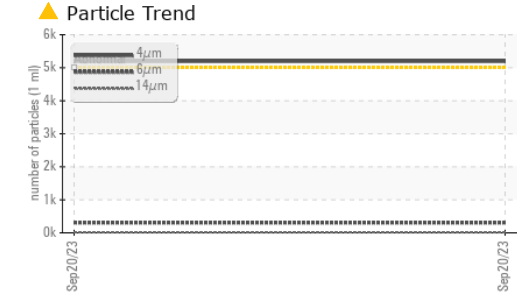





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	32	32.2	---	---

**SAMPLE IMAGES**

method	limit/base	current	history1	history2
Color				
Bottom				

**GRAPHS**

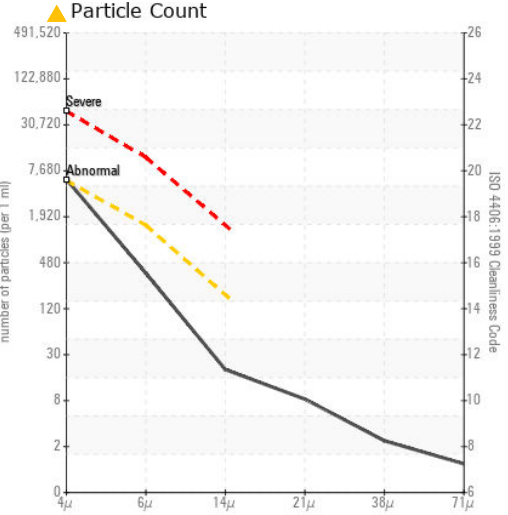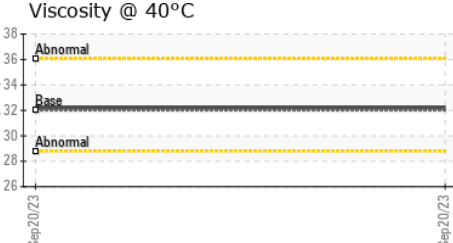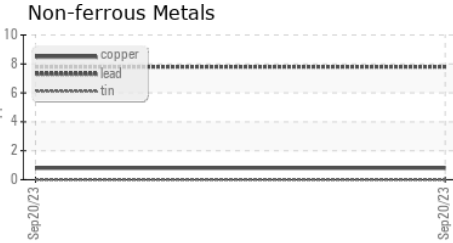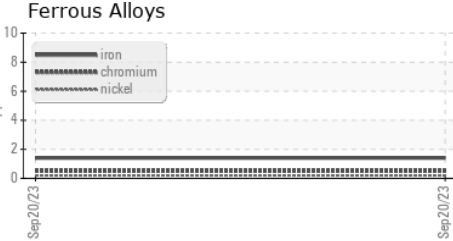

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : ST43460 **Received** : 30 Oct 2023  
**Lab Number** : 02592838 **Diagnosed** : 31 Oct 2023  
**Unique Number** : 5669917 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KF )

**Location Deric**  
 5145 rue Rideau  
 Quebec, QC  
 CA G2E 5H5  
 Contact: Pascal Langlois  
 pascal.langlois@groupepederic.ca  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.