




# OIL ANALYSIS REPORT

Sample Rating Trend

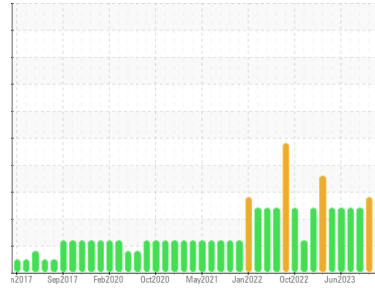

FUEL



Machine Id  
**NEW FLYER 0911**

Component  
**Diesel Engine**

Fluid  
**SAFETY-KLEEN PERFORMANCE PLUS XHD-7 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0878096</b>	WC0830294	WC0830258
Sample Date	Client Info		<b>01 Dec 2023</b>	13 Oct 2023	27 Aug 2023
Machine Age	kms	Client Info	<b>243792</b>	235106	0
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>SEVERE</b>	SEVERE	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	<b>29</b>	34	30
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185(m)	>100	<b>2</b>	2	1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>2</b>	2	1
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>63</b>	64	62
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>805</b>	776	875
Calcium	ppm	ASTM D5185(m)		<b>871</b>	873	940
Phosphorus	ppm	ASTM D5185(m)		<b>819</b>	804	940
Zinc	ppm	ASTM D5185(m)		<b>969</b>	963	1048
Sulfur	ppm	ASTM D5185(m)		<b>2098</b>	2110	2266
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	6	4
Sodium	ppm	ASTM D5185(m)		<b>92</b>	102	62
Potassium	ppm	ASTM D5185(m)	>20	<b>93</b>	102	61
Fuel	%	ASTM D7593*	>3.0	<b>11.5</b>	8.6	7.6
Glycol	%	ASTM D7922*		<b>0.0</b>	0.0	0.0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0.9</b>	1	0.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.4</b>	11.7	10.4
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>25.0</b>	26.4	24.9



# OIL ANALYSIS REPORT






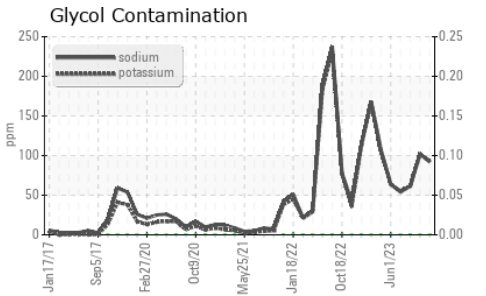
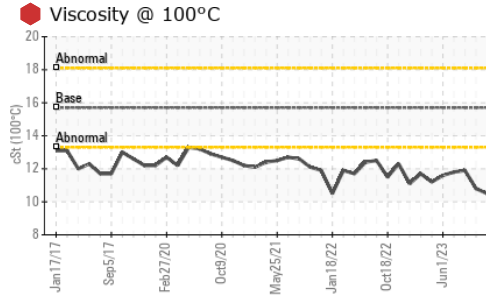
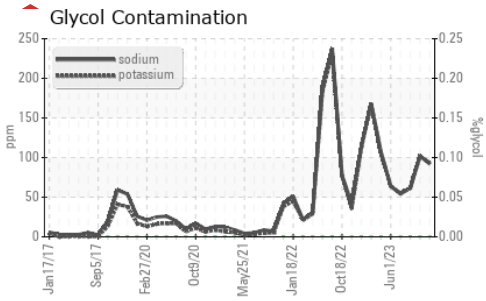


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	25.9	27.1	22.6

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	10.5	10.8	11.9

## GRAPHS

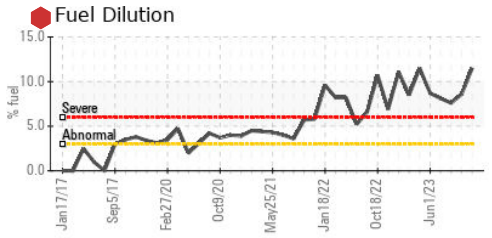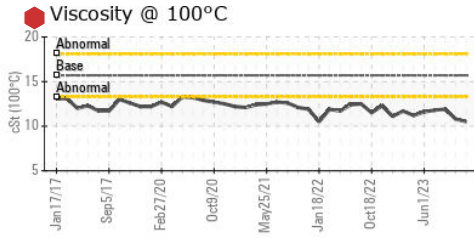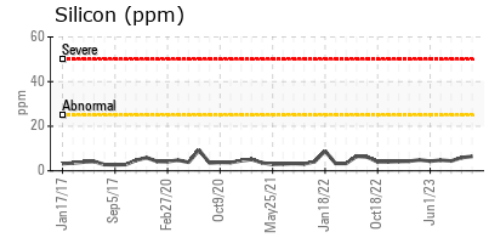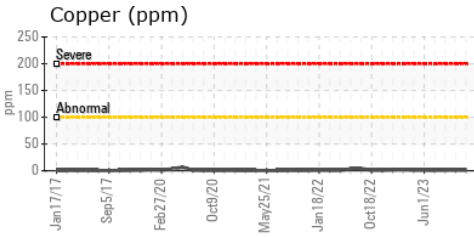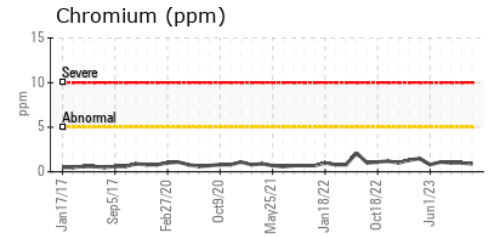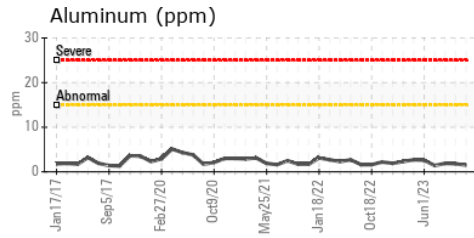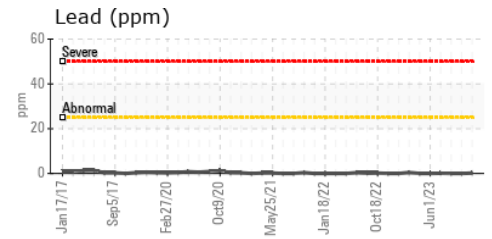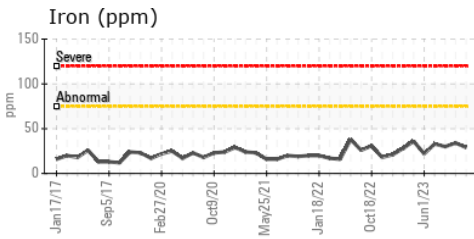

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0878096 **Received** : 06 Dec 2023  
**Lab Number** : 02601201 **Diagnosed** : 07 Dec 2023  
**Unique Number** : 5694286 **Diagnostician** : Bill Quesnel  
**Test Package** : MOB 1 ( Additional Tests: Glycol, PercentFuel, Visual )

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.