




# OIL ANALYSIS REPORT

Sample Rating Trend

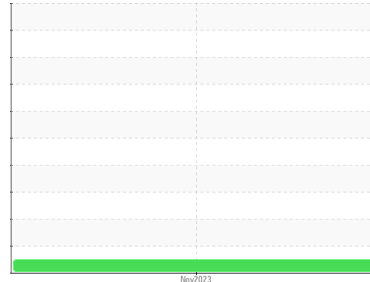

**NORMAL**



Machine Id  
**L1404**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 15W40. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0553574</b>	---	---
Sample Date	Client Info		<b>28 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>432178</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	<b>16</b>	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	---
Lead	ppm	ASTM D5185(m)	>40	<b>5</b>	---
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>44</b>	---
Barium	ppm	ASTM D5185(m)	10	<b>&lt;1</b>	---
Molybdenum	ppm	ASTM D5185(m)	100	<b>6</b>	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---
Magnesium	ppm	ASTM D5185(m)	450	<b>51</b>	---
Calcium	ppm	ASTM D5185(m)	3000	<b>2221</b>	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>925</b>	---
Zinc	ppm	ASTM D5185(m)	1350	<b>1174</b>	---
Sulfur	ppm	ASTM D5185(m)	4250	<b>2685</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	---
Sodium	ppm	ASTM D5185(m)	>158	<b>2</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>9</b>	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.4</b>	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.6</b>	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>25.7</b>	---



# OIL ANALYSIS REPORT







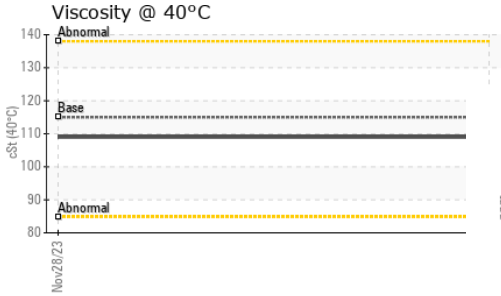
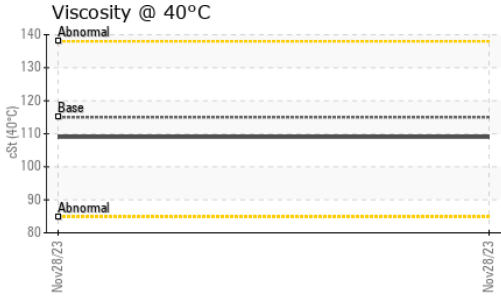


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>21.3</b>	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>109</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.2</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	126	<b>131</b>	---	---

## GRAPHS

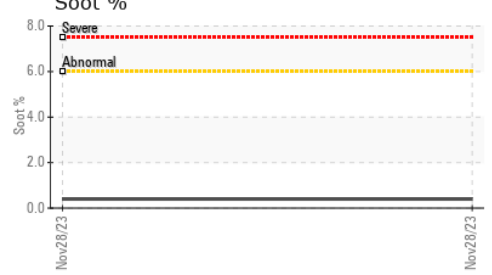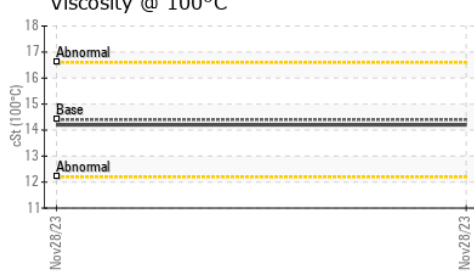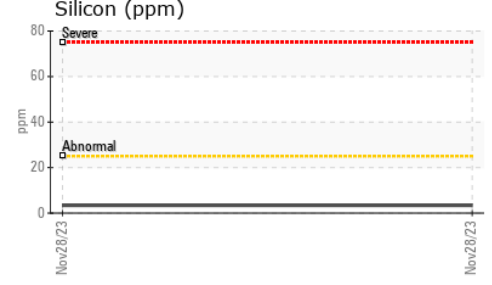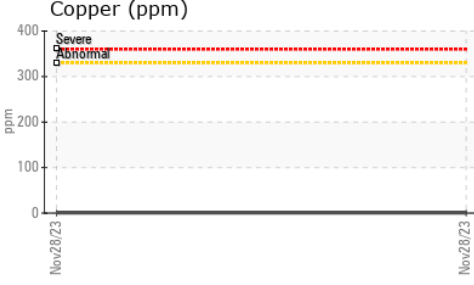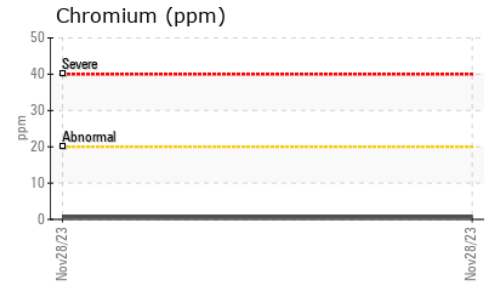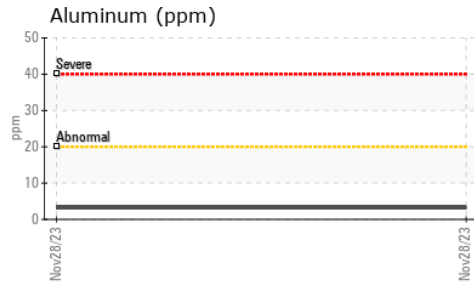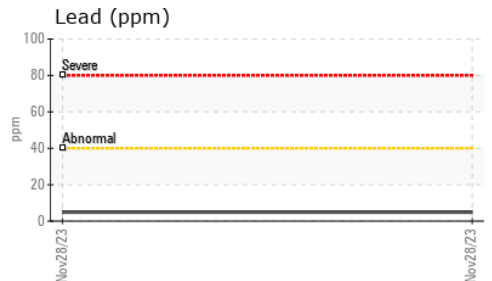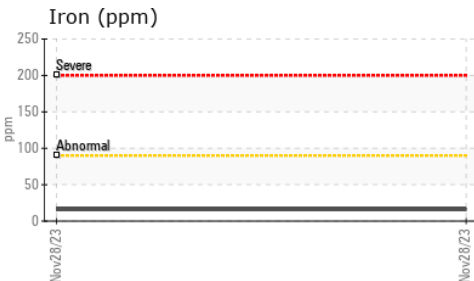

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0553574 **Received** : 11 Dec 2023  
**Lab Number** : **02602114** **Diagnosed** : 11 Dec 2023  
**Unique Number** : 5695199 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.