


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

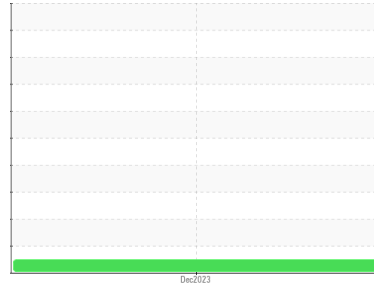

Area  
**[218673]**  
Machine Id  
**FTE01945**  
Component  
**Diesel Engine**  
Fluid  
**CAT DIESEL ENGINE OIL 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WA0020721</b>	---	---
Sample Date	Client Info			<b>08 Dec 2023</b>	---	---
Machine Age	hrs	Client Info		<b>193</b>	---	---
Oil Age	hrs	Client Info		<b>25</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2		<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>2</b>	---	---
Chromium	ppm	ASTM D5185(m)	>6	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>150	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>93</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>46</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>353</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1761</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>953</b>	---	---
Zinc	ppm	ASTM D5185(m)	1460	<b>1107</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2744</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---









INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>4.5</b>	---	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>19.1</b>	---	---

# OIL ANALYSIS REPORT

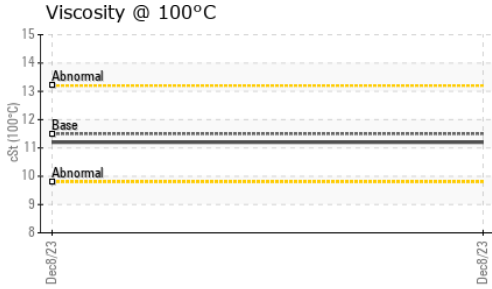

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>14.6</b>	---	---
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	11.5	<b>11.2</b>	---	---

## GRAPHS

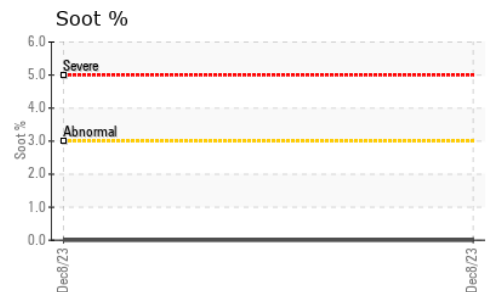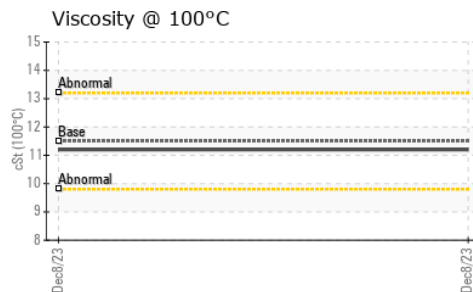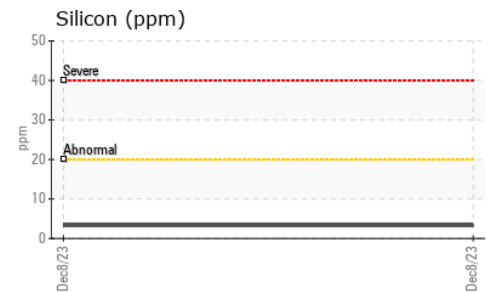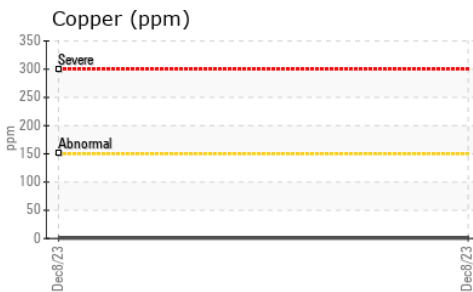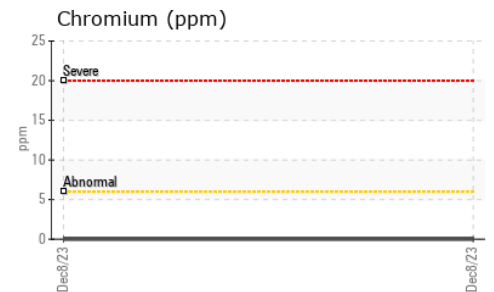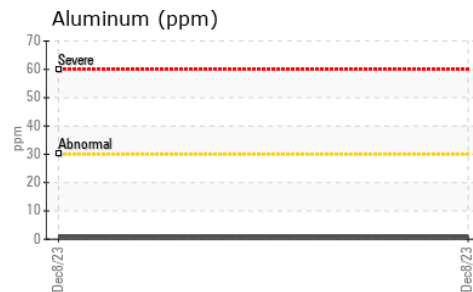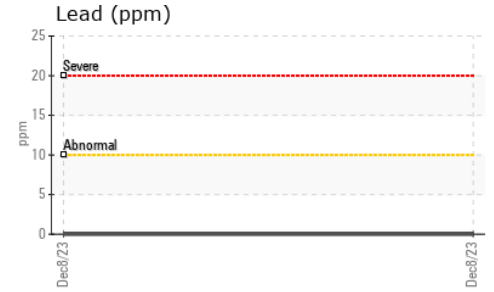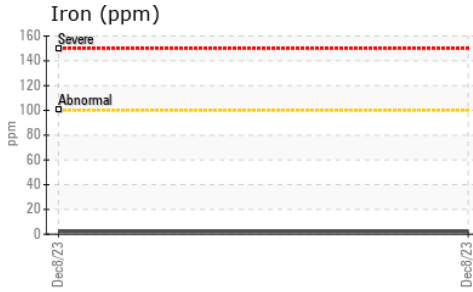

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WA0020721 **Received** : 12 Dec 2023  
**Lab Number** : **02602527** **Diagnosed** : 12 Dec 2023  
**Unique Number** : 5695612 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**Wajax Power Systems**  
 70 Raddall Avenue  
 Dartmouth, NS  
 CA B3B 1T7  
 Contact: Danelle Hoffman  
 dhoffman@wajax.com  
 T: (902)468-6200  
 F: (902)468-3325

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.