




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

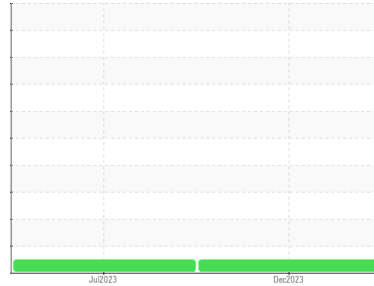

Area
(C-GQSN)
 Machine Id
[C-GQSN] BEECHCRAFT KING AIR 100 PCE-RB0123
 Component
Left Jet Turbine
 Fluid
EASTMAN TURBO OIL 2380 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0859465	WC0766974	---
Sample Date	Client Info		11 Dec 2023	21 Jul 2023	---
TSN	hrs	Client Info	7915	7136	---
TSO	hrs	Client Info	1503	724	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed		Client Info	Not Changed	N/A	---
Sample Status			NORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>8	0	0	---
Chromium	ppm	ASTM D5185(m)	>2	0	0	---
Nickel	ppm	ASTM D5185(m)	>2	0	0	---
Titanium	ppm	ASTM D5185(m)	>2	0	0	---
Silver	ppm	ASTM D5185(m)	>2	<1	0	---
Aluminum	ppm	ASTM D5185(m)	>2	0	<1	---
Lead	ppm	ASTM D5185(m)	>3	<1	0	---
Copper	ppm	ASTM D5185(m)	>3	<1	<1	---
Tin	ppm	ASTM D5185(m)	>2	0	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<1	<1	---
Barium	ppm	ASTM D5185(m)	0	<1	0	---
Molybdenum	ppm	ASTM D5185(m)	0	0	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)	0	0	0	---
Calcium	ppm	ASTM D5185(m)	0	0	<1	---
Phosphorus	ppm	ASTM D5185(m)	2500	2542	2616	---
Zinc	ppm	ASTM D5185(m)	0	<1	3	---
Sulfur	ppm	ASTM D5185(m)	0	4	2	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS





	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>8	0	<1	---
Sodium	ppm	ASTM D5185(m)		<1	<1	---
Potassium	ppm	ASTM D5185(m)	>20	0	<1	---
Water	%	ASTM D6304*	>0.1	0.017	0.080	---
ppm Water	ppm	ASTM D6304*	>1000	176	800.2	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.43	0.27	0.41	---



OIL ANALYSIS REPORT

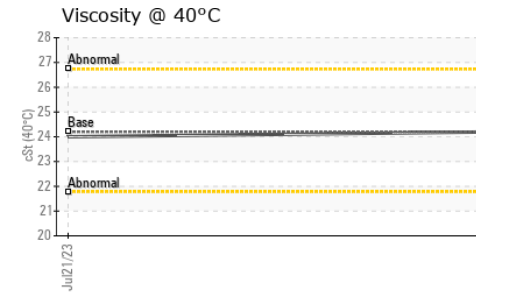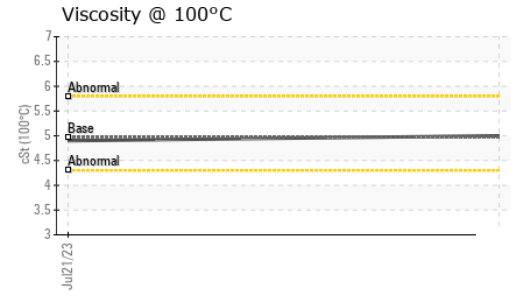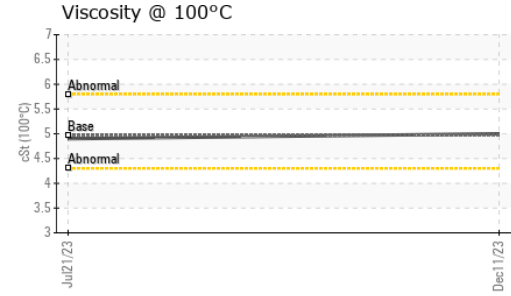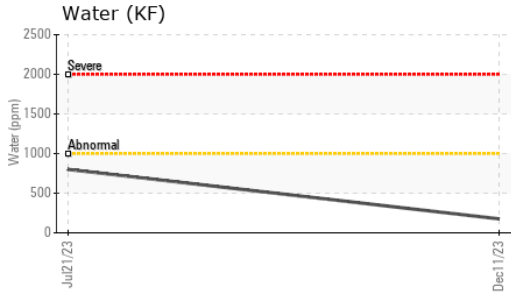




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	24.2	24.2	24.0
Visc @ 100°C	cSt	ASTM D7279(m)	4.97	5	4.9
Viscosity Index (VI)	Scale	ASTM D2270*	134	136	130

SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color					no image
Bottom					no image

GRAPHS

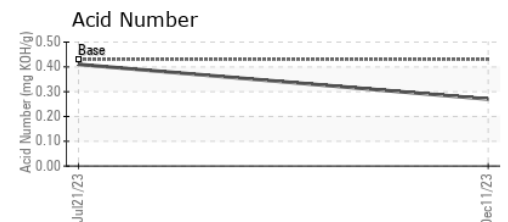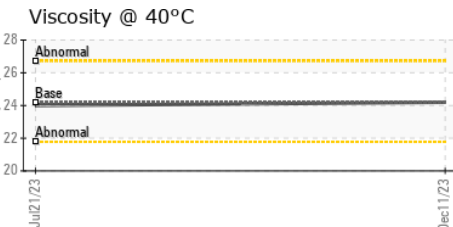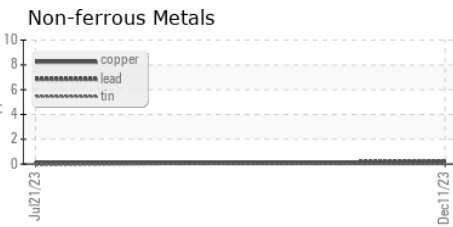

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0859465 **Received** : 14 Dec 2023
Lab Number : **02603185** **Diagnosed** : 18 Dec 2023
Unique Number : 5696270 **Diagnostician** : Kevin Marson
Test Package : AVI 3


Wings Over Kississing
 708 South Gate Rd
 St. Andrews, MB
 CA R1A 3P8
 Contact: Menno Bergen
 mbaero.menno@gmail.com
 T: (204)338-1114
 F: (204)338-0011

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.


FERROGRAPHY REPORT

Area
(C-GQSN)
 Machine Id
[C-GQSN] BEECHCRAFT KING AIR 100 PCE-RB0123
 Component
Left Jet Turbine
 Fluid
EASTMAN TURBO OIL 2380 (--- LTR)


Magn: 200x Illum: BC

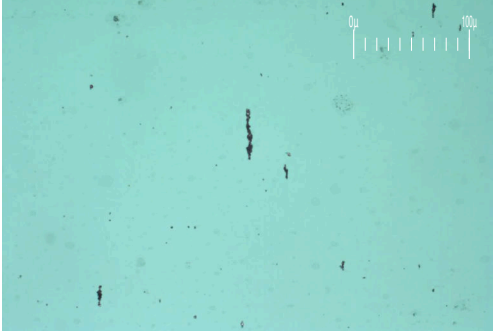

Magn: 50x Illum: RW

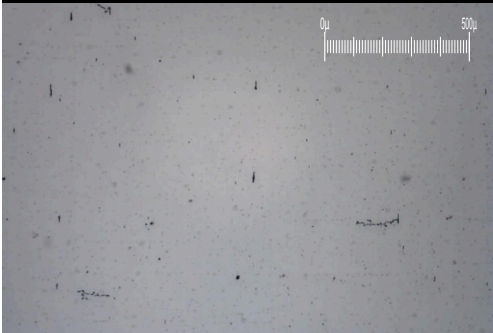

Magn: 100x Illum: RW

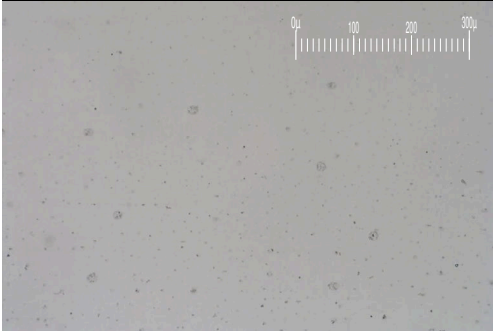


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		2.9	2.3	---
Small Particles		DR-Ferr*		2.6	1.6	---
Total Particles		DR-Ferr*	>---	5.5	3.9	---
Large Particles Percentage	%	DR-Ferr*		5.5	17.9	---
Severity Index		DR-Ferr*		1	2	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	1	
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	

WEAR

All component wear rates are normal.
 The ferrography results are normal indicating no abnormal wear in the system.

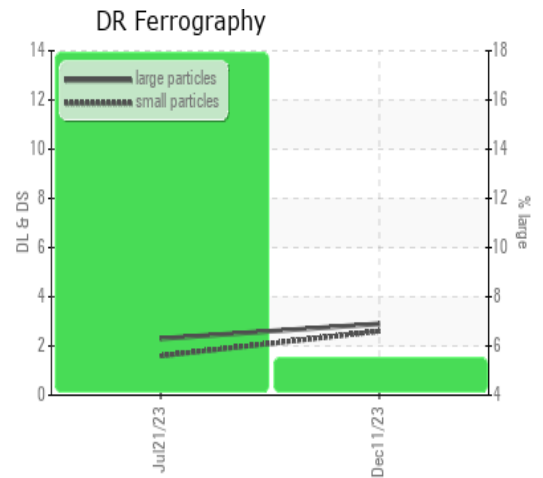

This page left intentionally blank