




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

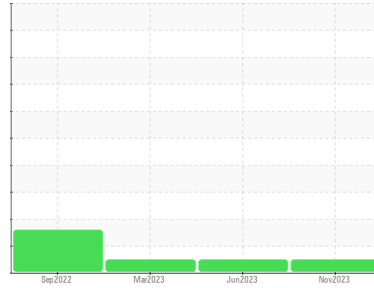

Area  
**(C-FGWR)**  
 Machine Id  
**[C-FGWR] BEHCRAFT KING AIR B200 PCE-PJ0154**  
 Component  
**Left Jet Turbine**  
 Fluid  
**BP TURBO OIL 2380 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

### Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0880035</b>	WC0818473	WC0779688
Sample Date	Client Info	<b>30 Nov 2023</b>	09 Jun 2023	01 Mar 2023
TSN	hrs Client Info	<b>10698</b>	10517	10435
TSO	hrs Client Info	<b>6029</b>	5848	5766
Oil Age	hrs Client Info	<b>0</b>	0	2092
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >8	<b>0</b>	0	0
Chromium	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm ASTM D5185(m) >2	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185(m) >2	<b>&lt;1</b>	0	0
Lead	ppm ASTM D5185(m) >3	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185(m) >3	<b>&lt;1</b>	<1	0
Tin	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Barium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m) 0	<b>0</b>	<1	0
Calcium	ppm ASTM D5185(m) 0	<b>0</b>	<1	0
Phosphorus	ppm ASTM D5185(m) 2500	<b>2646</b>	2695	2682
Zinc	ppm ASTM D5185(m) 0	<b>&lt;1</b>	1	<1
Sulfur	ppm ASTM D5185(m) 0	<b>4</b>	3	2
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS





method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >8	<b>&lt;1</b>	<1	0
Sodium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	2	<1
Water	% ASTM D6304* >0.1	<b>0.049</b>	0.089	0.021
ppm Water	ppm ASTM D6304* >1000	<b>490</b>	893.0	214.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974* 0.43	<b>0.31</b>	0.32	0.39




# OIL ANALYSIS REPORT

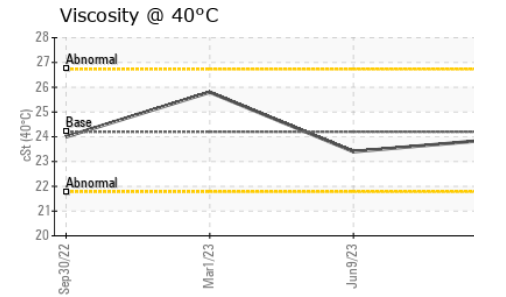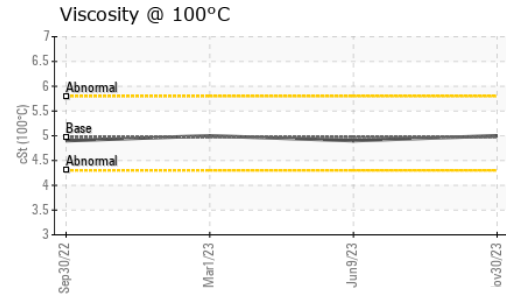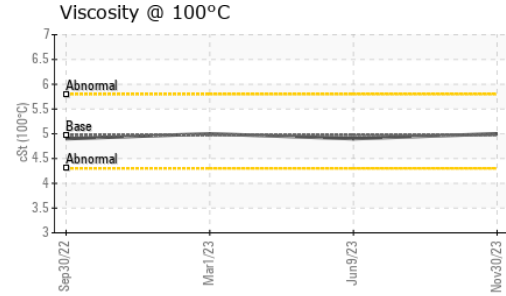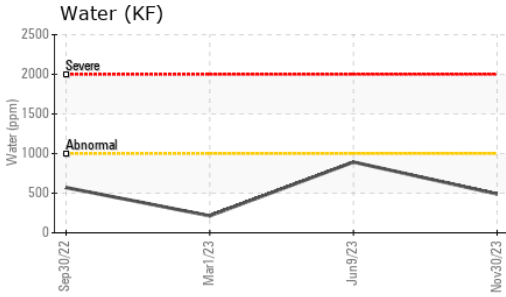





PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	24.2	23.9	23.4
Visc @ 100°C	cSt	ASTM D7279(m)	4.97	5	4.9
Viscosity Index (VI)	Scale	ASTM D2270*	134	140	137

## SAMPLE IMAGES

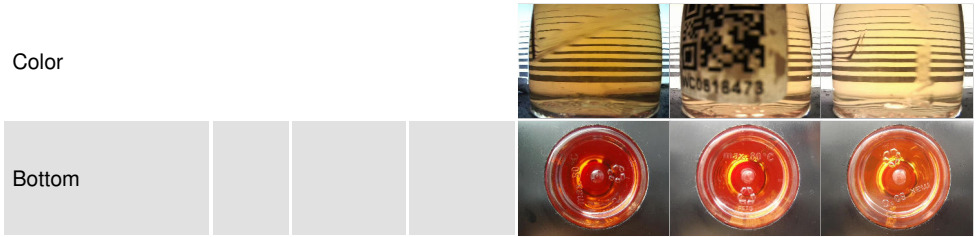

## GRAPHS

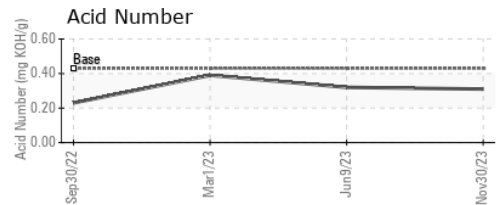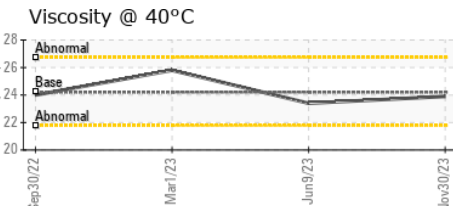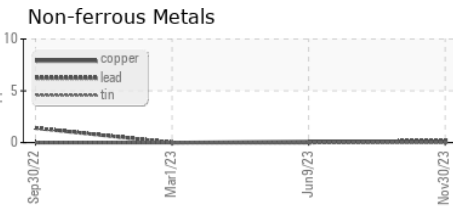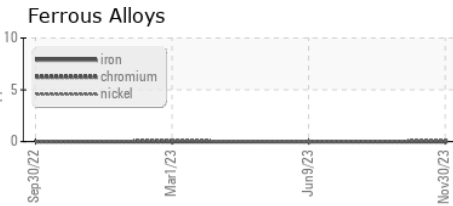

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0880035  
**Lab Number** : 02604115  
**Unique Number** : 5697200  
**Test Package** : AVI 3

**Received** : 19 Dec 2023  
**Diagnosed** : 21 Dec 2023  
**Diagnostician** : Kevin Marson

**Keewatin Air LP**  
 50 Morberg Way  
 Winnipeg, MB  
 CA R3H 0A4  
 Contact: Rochelle Aranez  
 raranez@keewatinair.ca  
 T: (204)888-0100  
 F: (204)888-5791


To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.




# FERROGRAPHY REPORT

Area  
**(C-FGWR)**  
 Machine Id  
**[C-FGWR] BEHCRAFT KING AIR B200 PCE-PJ0154**  
 Component  
**Left Jet Turbine**  
 Fluid  
**BP TURBO OIL 2380 (--- GAL)**


Magn: 200x Illum: BC

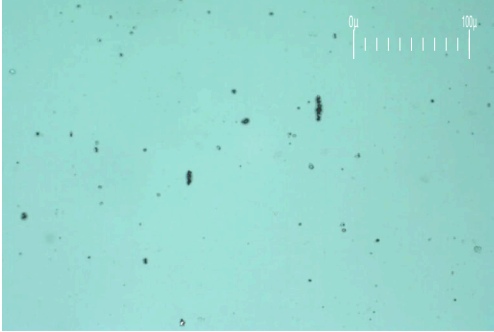

Magn: 50x Illum: RW

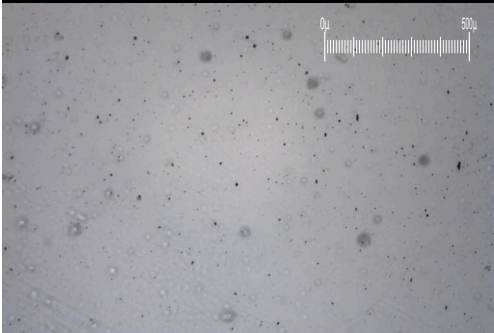

Magn: 100x Illum: RW

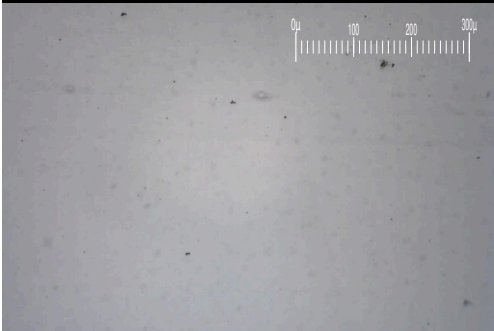


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>0.7</b>	3.5	8.4
Small Particles		DR-Ferr*		<b>0.7</b>	3.9	7.4
Total Particles		DR-Ferr*	>---	<b>1.4</b>	7.4	15.8
Large Particles Percentage	%	DR-Ferr*		<b>0</b>	0	6.3
Severity Index		DR-Ferr*		<b>0</b>	1	8

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*				1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	1

## WEAR

All component wear rates are normal. The ferroggraphy results are normal indicating no abnormal wear in the system.

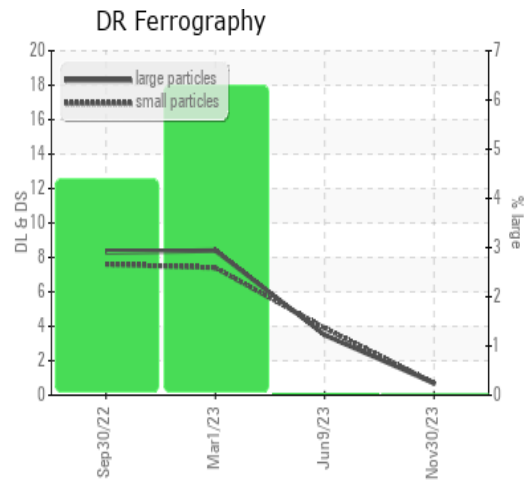

*This page left intentionally blank*