



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Area
[30707104]
 Machine Id
HDL CH5198
 Component
Hydraulic System
 Fluid
{not provided} (--- LTR)



DIAGNOSIS

Recommendation

Nous avons pris note que le filtre a été remplacé au moment de l'échantillonnage. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiquent que ce fluide est du ISO 32 AW Hydraulic Oil. Veuillez confirmer la viscosité de l'huile et veuillez préciser la marque de votre prochain échantillon. Veuillez communiquer avec un représentant Cummins AOK au sujet de l'achat d'une trousse d'échantillonnage appropriée à vos besoins. Notez: nous recommandons d'acheter les trousse MOB 2 pour cet équipement, ce testkit inclut le Compte de Particule pour déterminer la propreté ISO du liquide.

Wear

Le taux de plomb est marginal. Les taux d'usure de tous les autres composants sont normaux.

Contamination

Il n'y a aucune indication de contamination dans le composant (non confirmée).

Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		CU0015664	---	---
Sample Date	Client Info		08 Nov 2023	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			MARGINAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	6	---	---
Chromium	ppm	ASTM D5185(m) >10	0	---	---
Nickel	ppm	ASTM D5185(m) >10	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >10	1	---	---
Lead	ppm	ASTM D5185(m) >10	▲ 80	---	---
Copper	ppm	ASTM D5185(m) >75	<1	---	---
Tin	ppm	ASTM D5185(m) >10	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---


ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	1	---	---
Calcium	ppm	ASTM D5185(m)	69	---	---
Phosphorus	ppm	ASTM D5185(m)	332	---	---
Zinc	ppm	ASTM D5185(m)	411	---	---
Sulfur	ppm	ASTM D5185(m)	2211	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	2	---	---
Sodium	ppm	ASTM D5185(m)	1	---	---
Potassium	ppm	ASTM D5185(m) >20	1	---	---

OIL ANALYSIS REPORT

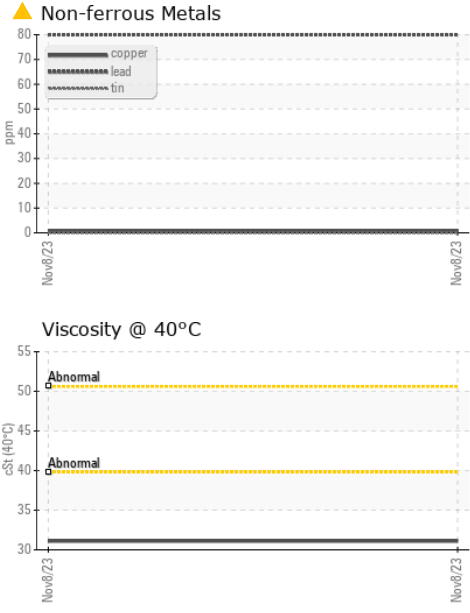


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	31.1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

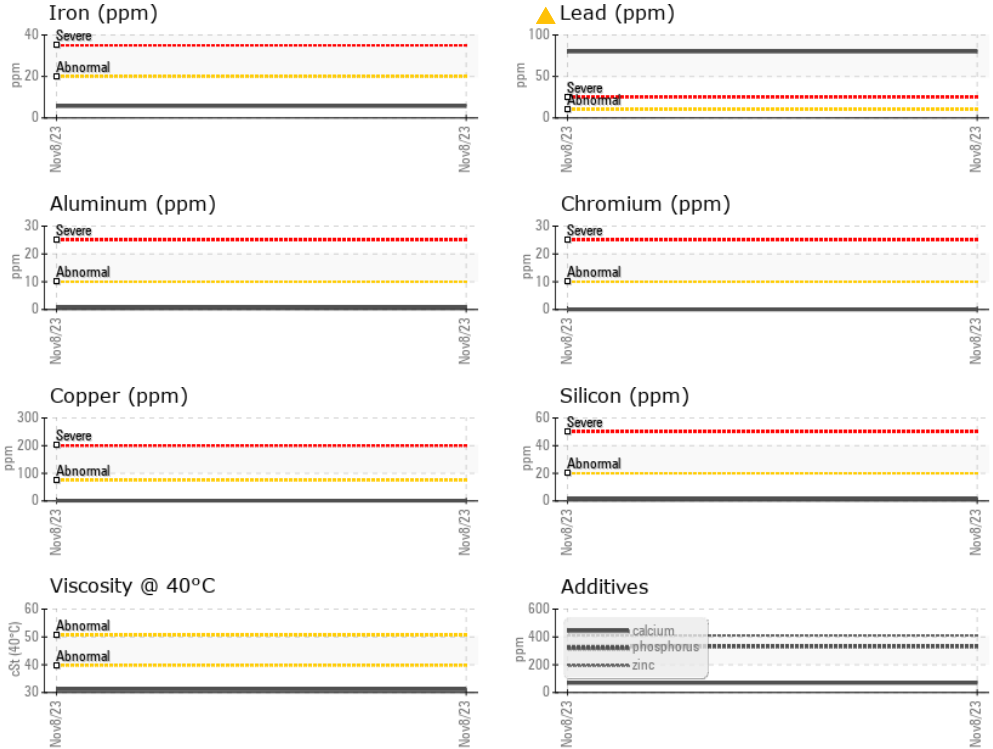

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0015664 **Received** : 20 Dec 2023
Lab Number : **02604432** **Tested** : 21 Dec 2023
Unique Number : 5697517 **Diagnosed** : 21 Dec 2023 - Kevin Marson
Test Package : MOB 1

Hydro Quebec
 2625 Lebourgneuf Boulevard
 Quebec, QC
 CA G2C 1S2
 Contact: Catherine Vaillancourt
 vaillancourt.catherine@hydro.qc.ca
 T: (418)998-8321
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.