

OIL ANALYSIS REPORT

SAB1 SAB1 G2 Governor

Hydraulic System

ESSO TERESSO ISO 46 (1600 LTR)

Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Component wear rates appear to be normal (unconfirmed).

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		12003 Jan200	05 Jul2006 Oct2007	Jan2009 Jan2011 Apr2012 .	Jun2022	
SAMPLE INFORMA	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0864656	WC0828611	WC0642835
Sample Date		Client Info		21 Dec 2023	27 Aug 2023	27 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL
CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	<1	<1
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	<1	0
Lead	ppm	ASTM D5185(m)	>20	0	0	<1
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	0	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	0	0	0	0
Calcium	ppm	ASTM D5185(m)	0	1	1	0
Phosphorus	ppm	ASTM D5185(m)	2.4	9	11	7
Zinc	ppm	ASTM D5185(m)	0	3	4	8
Sulfur	ppm	ASTM D5185(m)		723	684	652
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINANTS		method	limit/base	current	history1	history2
	ppm	ASTM D5185(m)	>15	0	0	<1
Sodium	ppm	ASTM D5185(m)		<1	<1	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	215	325	△ 23973
Particles >6µm		ASTM D7647	>1300	56	92	<u>4484</u>
Particles >14μm		ASTM D7647	>160	7	11	60
Particles >21µm		ASTM D7647	>40	2	4	9
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0

Oil Cleanliness


15/13/10

ISO 4406 (c) >19/17/14

22/19/13



OIL ANALYSIS REPORT

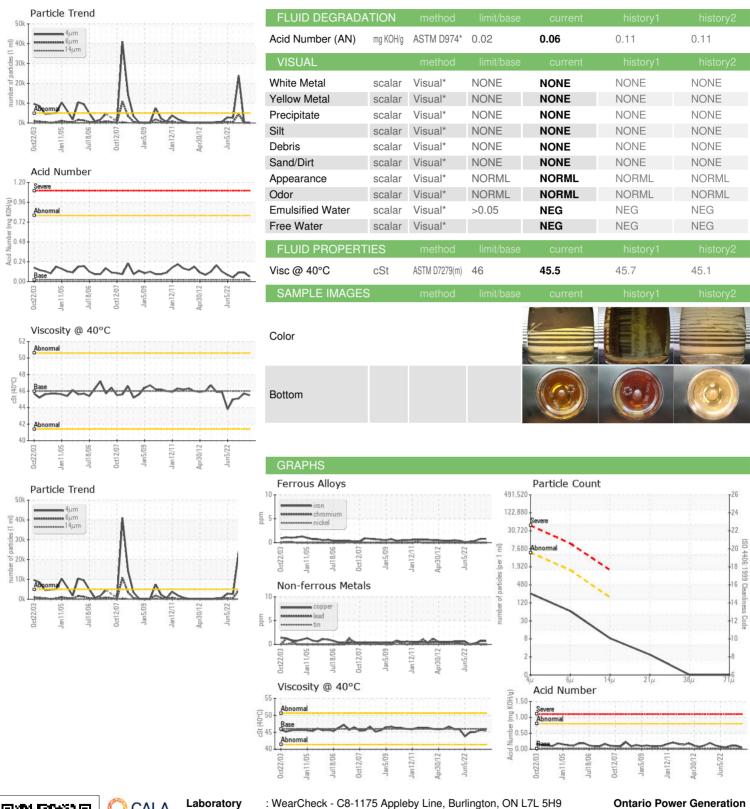



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WC0864656 : 02604960

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Recieved Diagnosed : 5698045

Diagnostician Test Package : IND 2 (Additional Tests: TAN Man)

: 22 Dec 2023 : 27 Dec 2023 : Kevin Marson

NIAGARA PLANT GROUP,, 14000 NIAGARA PKWY NIAGARA ON THE LAKE, ON CA LOS 1J0 Contact: Michael Brochu

mike.brochu@opg.com T: (905)357-0322 F: (905)374-5466

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

Report Id: ONTQUE [WCAMIS] 02604960 (Generated: 12/27/2023 12:03:32) Rev: 2

Contact/Location: Michael Brochu - ONTQUE